Bang&Olufsen

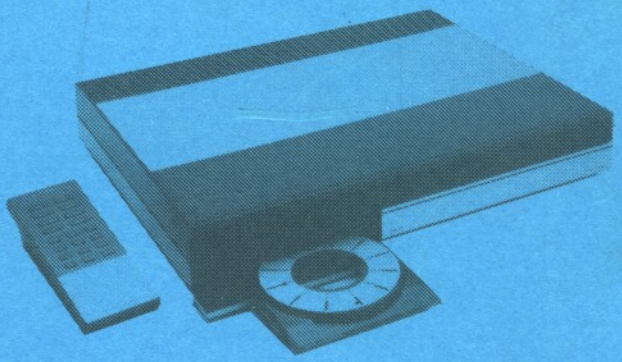

Beogram CD 50
Type 5111/12/13/14/15

CD-Terminal
Type 5005

Audioklassik
Dossestrasse 14
10247 Berlin

SERVICE MANUAL

MODULES

1	Display and key Control	diagr. D
2	Display-dots	diagr. D
3	Display-digits	diagr. D
4	Play	diagr. D
5	Display	diagr. D
6	Remote control receiver	diagr. D
7	Servo circuit	diagr. A+B
8	Decoder & power supply	diagr. B+C
9	Fuse board	diagr. B
16	Remote transmitter	diagr. E
17	Remote keyboard	diagr. E

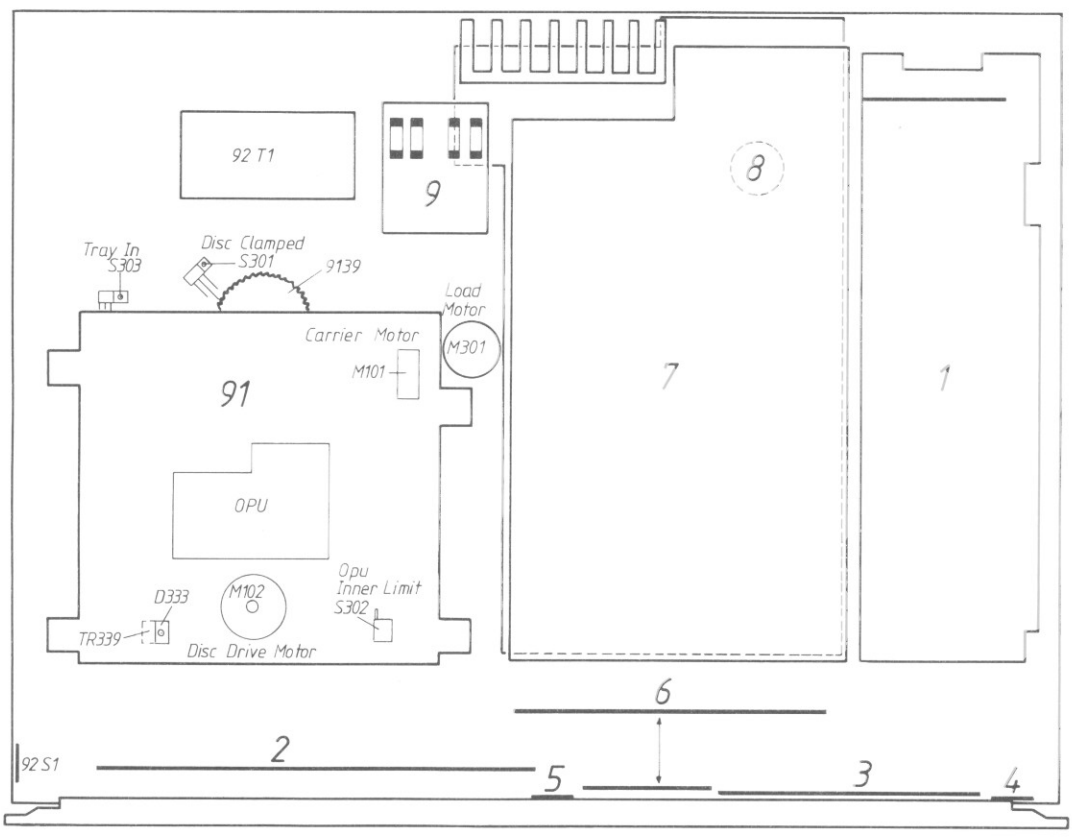

CAUTIONS

The light pin (OPU unit) is much more sensitive to static charge than a MOS IC.
Careless treatment during servicing may reduce life expectancy drastically. For this reason care should be taken that during servicing the potentials of the aids and yourself equal the potential of the mechanism.

The product contains a laser component with a laser radiation exceeding the laser limit class 1.

CLASS 1
LASER PRODUCT

Symbol for Safety Components

When replacing components with this symbol components with identical part numbers are to be used. The new component must be fitted in the same way as the one replaced.

EXPLANATION OF DIAGRAM

System of Co-ordinates

The largest PC-board drawings have been provided with a co-ordinate system. The components on these PC-boards are provided with a grid reference on the diagram indicating in what grid they are positioned on the PC-board (smaller typing than position numbers – e.g. B3).

Wiring Connections

The wiring connections on the diagram are assembled in "bundless". The individual wires are coded to indicate to where they are leading.

INTERNAL CONNECTION
ON ONE DIAGRAM PAGE

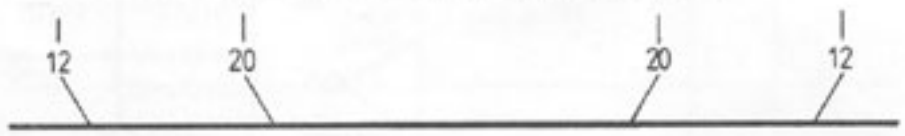

Internal connections on a diagram page are indicated by a number. The bend of the wire indicates in which direction the other end of the wire may be found.

CONNECTION TO ANOTHER
DIAGRAM PAGE

DIAGRAM A

DIAGRAM C

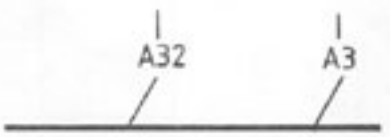

Connections to another diagram page are indicated by a number, as well as by a letter of the diagram to which the connections lead.

1-3 1-3

BLOCK DIAGRAM

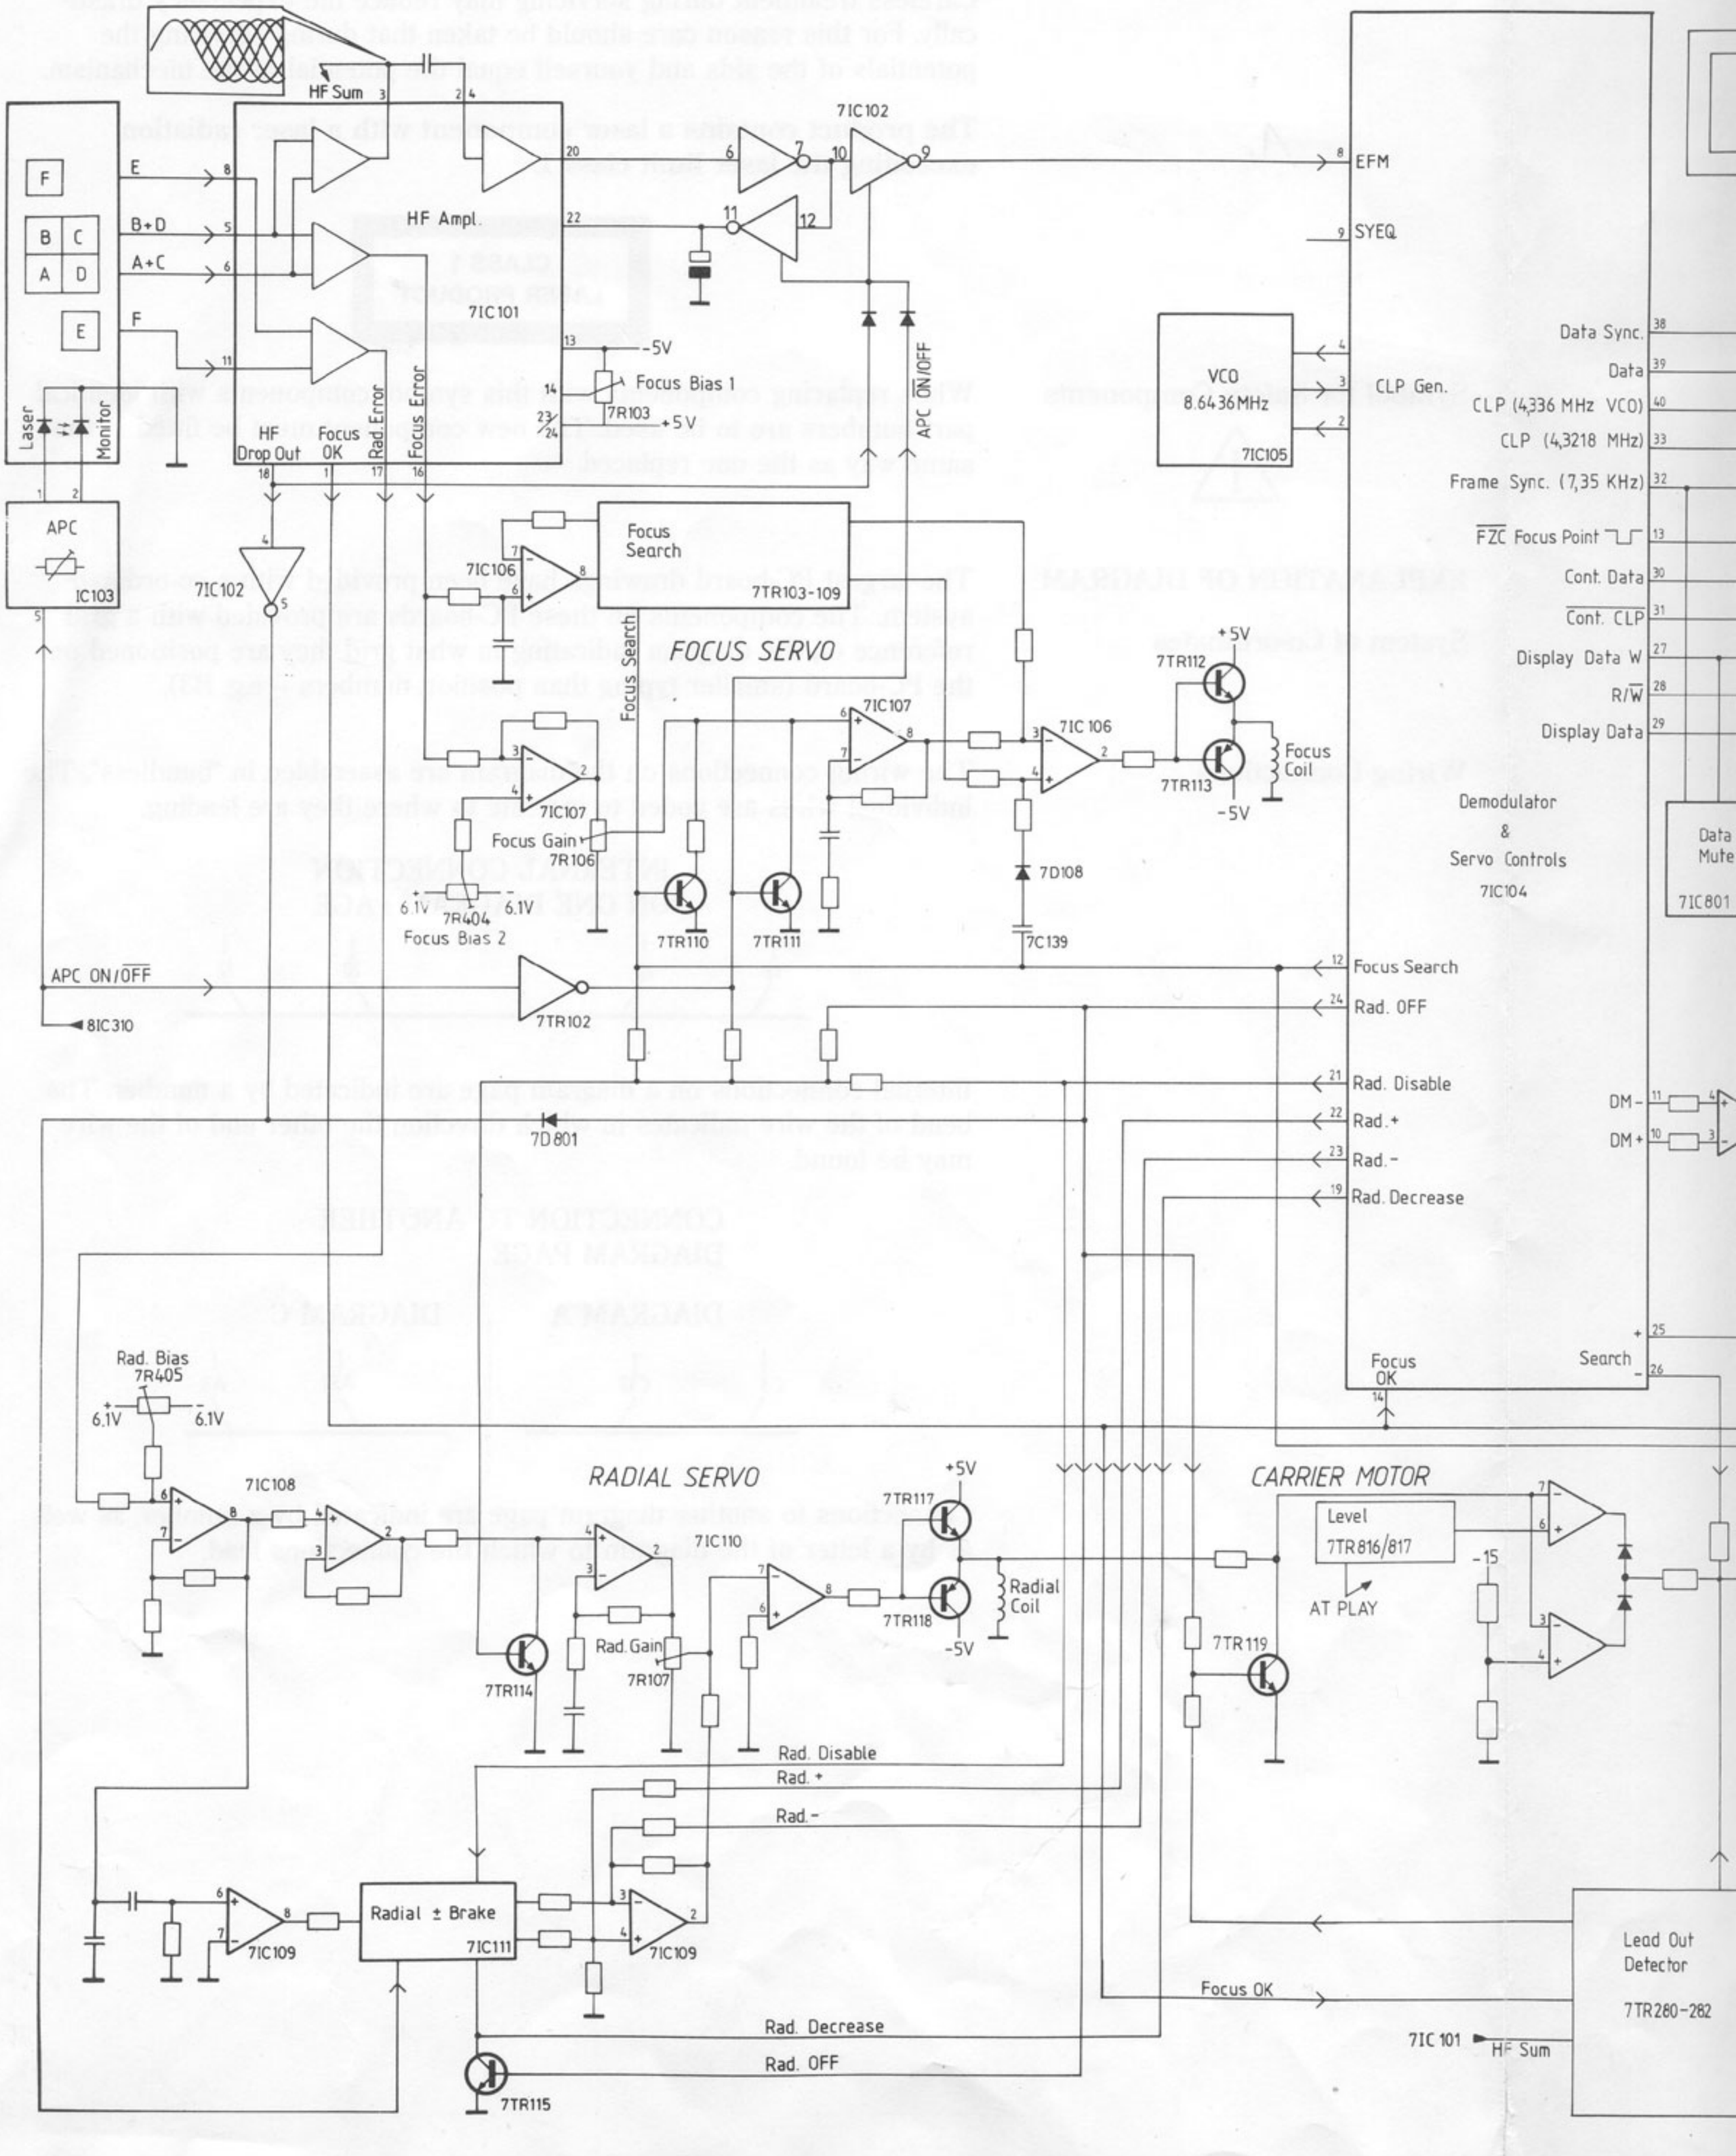

Bang & Olufsen

Address
RAM
8IC301
A_0 ~ A_{10}
D_0 ~ D_7
Data
22 $\overline{WE}$/RE
23 $\overline{OE}$
Signal Processor
8IC302
8.6436 MHz
d_0 ~ d_{15}
DAC
8IC303
8IC306
Left
8IC307/308
8TR301/303/345
Right
LPF
8IC308
De-emph.
8IC307
8TR304 /846
8TR305 / 306
L
R
Data Sync. 38 → 6
Data 39 → 5
CLP (4,336 MHz VCO) 40 → 4
CLP (4,3218 MHz) 33 → 9
Frame Sync. (7,35 KHz) 32 → 10
C1F1 54
C1F2 55
C2F1 57
C2F2 58
CLP Gen.
$\overline{FZC}$ Focus Point 13 →
Cont. Data 30 →
$\overline{Cont.\ CLP}$ 31 →
Display Data W 27 →
R/$\overline{W}$ 28 →
Display Data 29 →
11 27 26 30 29 28
$\overline{R}$/W
4MHz
System Computer
8IC310
Demodulator & Servo Controls
7IC104
Data Mute
7IC801
7TR203
Disc Det.
9TR339
8TR307
17
12 APC ON/$\overline{OFF}$
18 Tray Out
19 Disc Clamped
23 Tray In
20 DPU Inner Limit
10 Disc Brake
PWR ON/OFF(2) Focus OK Reset
25 21 2
Close 13
Open 14
8IC309
Load Motor
M301
AT PLAY 16
Data Ready 37
Data REQ 31
Data R/$\overline{W}$ 32
Interrupt 3
Data
4
8TR309
DISC MOTOR
DM − 11
DM + 10
7IC115
7R108
DM Gain
Disc Motor Circuit (Hall-motor)
7IC113 /114 7TR124 /129
Search + 25 − 26
Focus OK 14
+V
-V
Start-Up Mute
8TR317 /318 /319
31 39 Data ACK $\overline{R}$/W 6
IR
6TR1 - 6
37
15
Mute 13
6MHz
1IC1
EJECT 1
PLAY/● 36
DISPLAY 35
Data 32
Play 12
CLP 33
Data 34
1TR4
2IC1
16 x
38 Link
PWR ON/OFF(1) Reset 14 4
1TR6
POWER SUPPLY
5V 1TR1 TR2
1IC1
8IC310 & LOAD MOTOR
5V 8TR315/316/350
±5V ±15V 8TR324 - TR336
+5V
7TR120
TR121
-5V
7IC113
Carrier Motor M101
7TR123
-15
Carrier Motor Mute
7TR801–802
Lead Out Detector
7TR280–282
7IC101 HF Sum

(1)
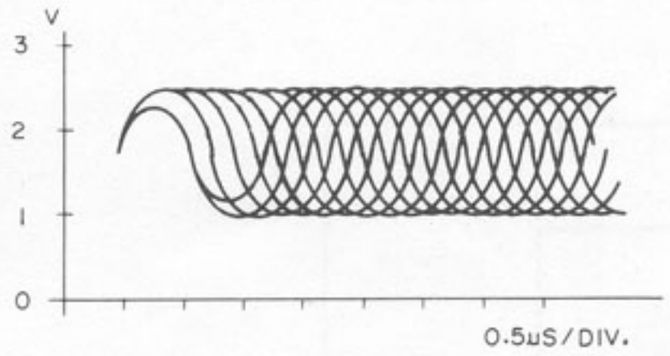

(2)
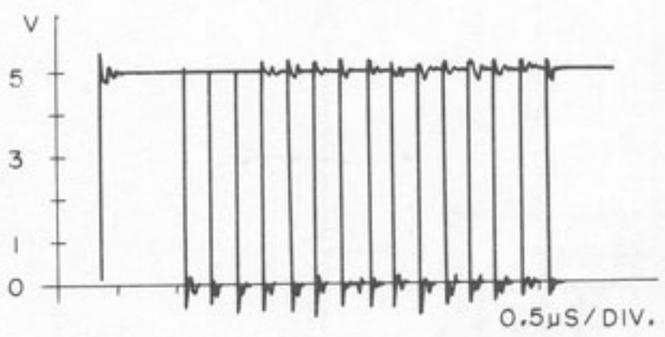

(3)
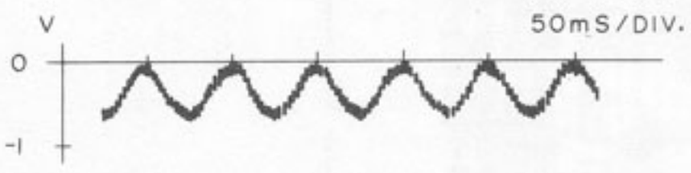

(4)

(5)

(6)

(7) (8)
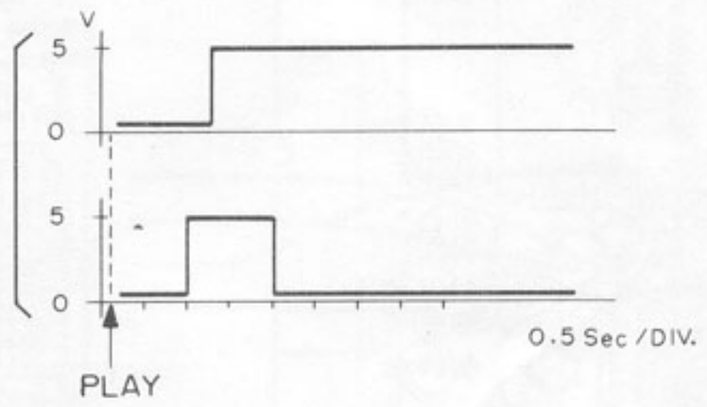

(9)
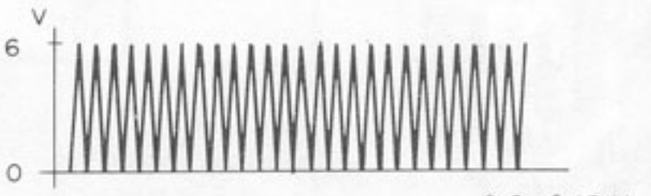

(10)
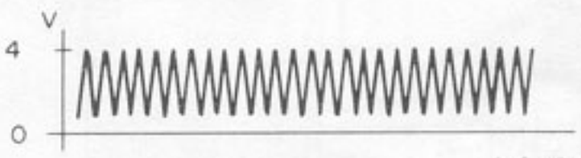

(11)
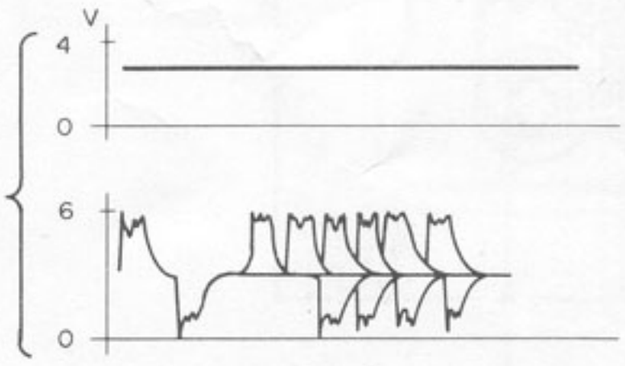

(12) (13)
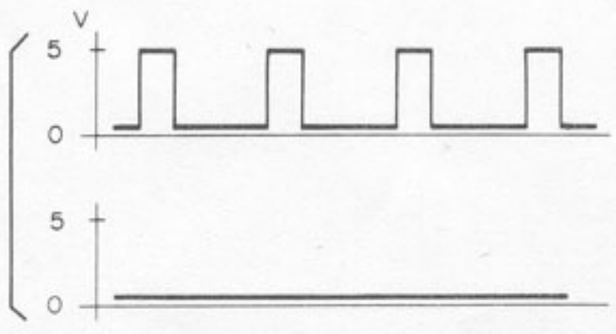

(14) (15) (16)
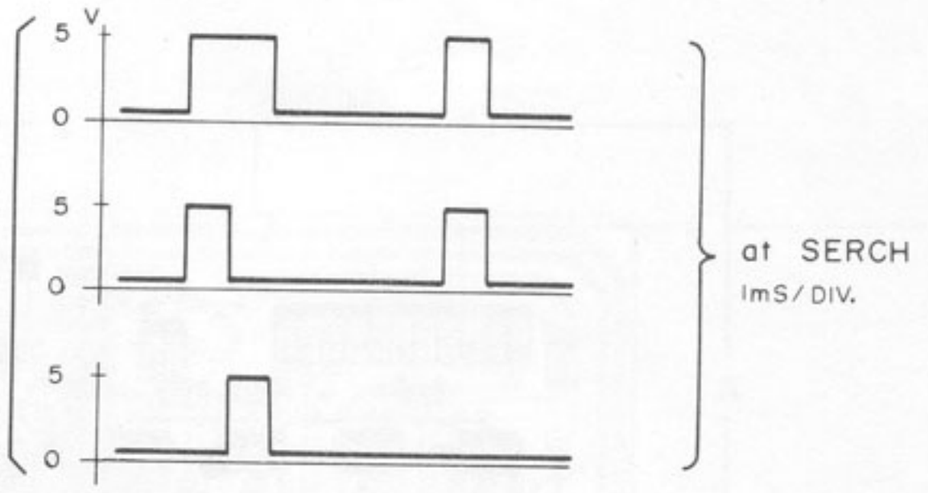

(17) (18) (19) (20)
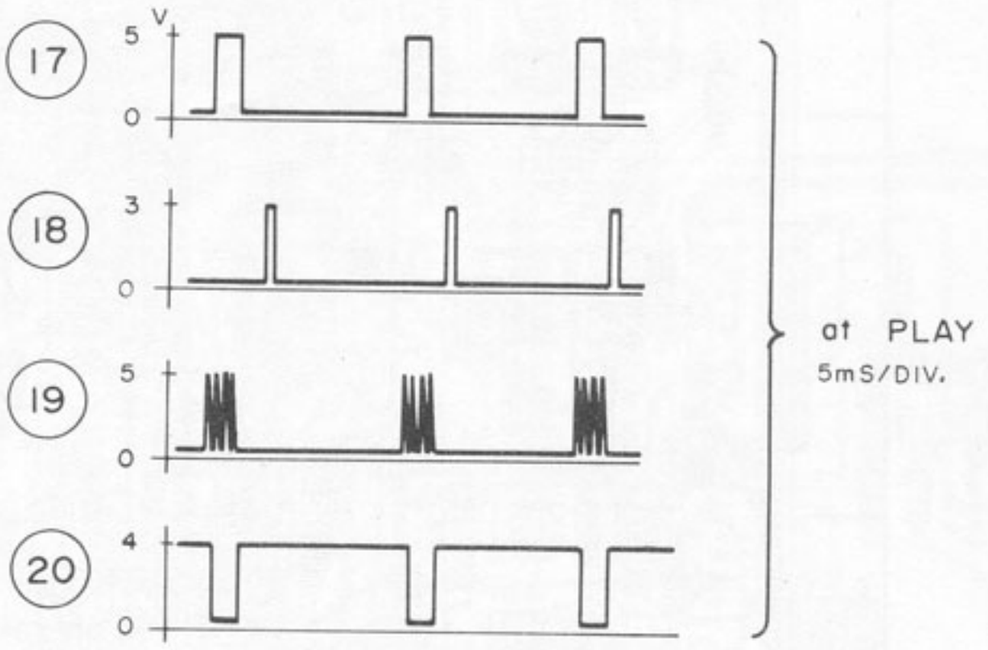

(21) (22) (23) (24)
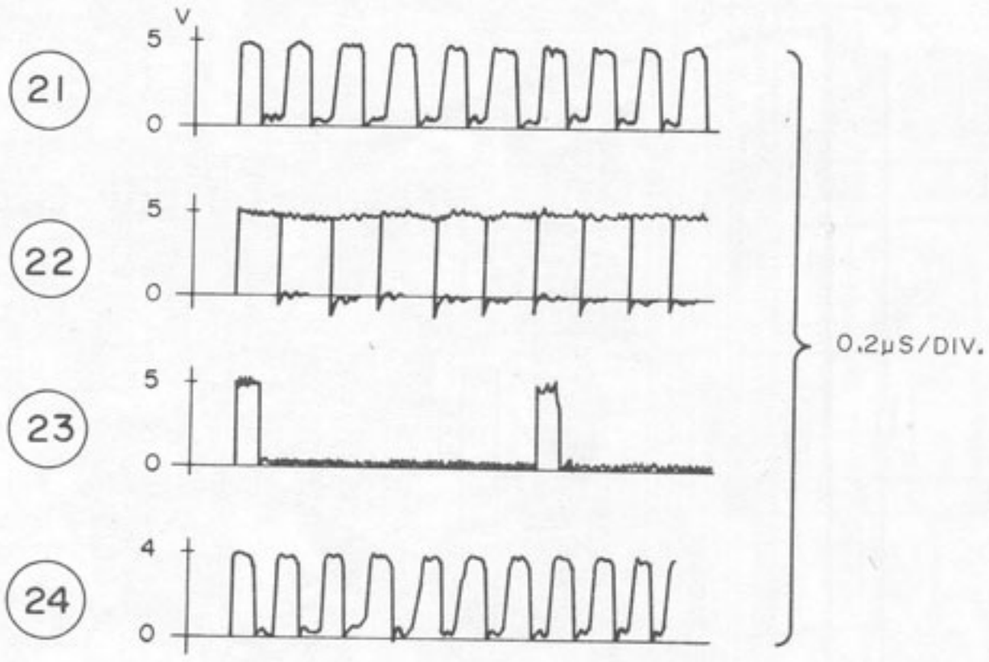

(25) (26) (27)
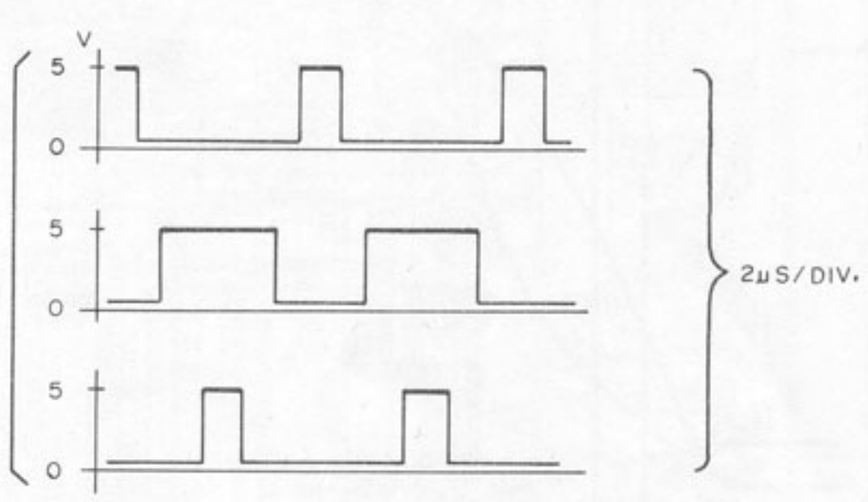

(28)
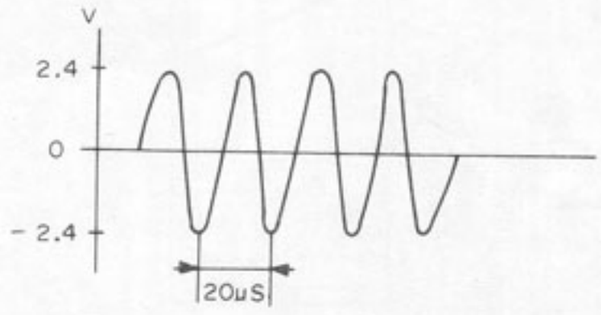

Audioklassik
Dossestrasse 14
10247 Berlin

DECODER

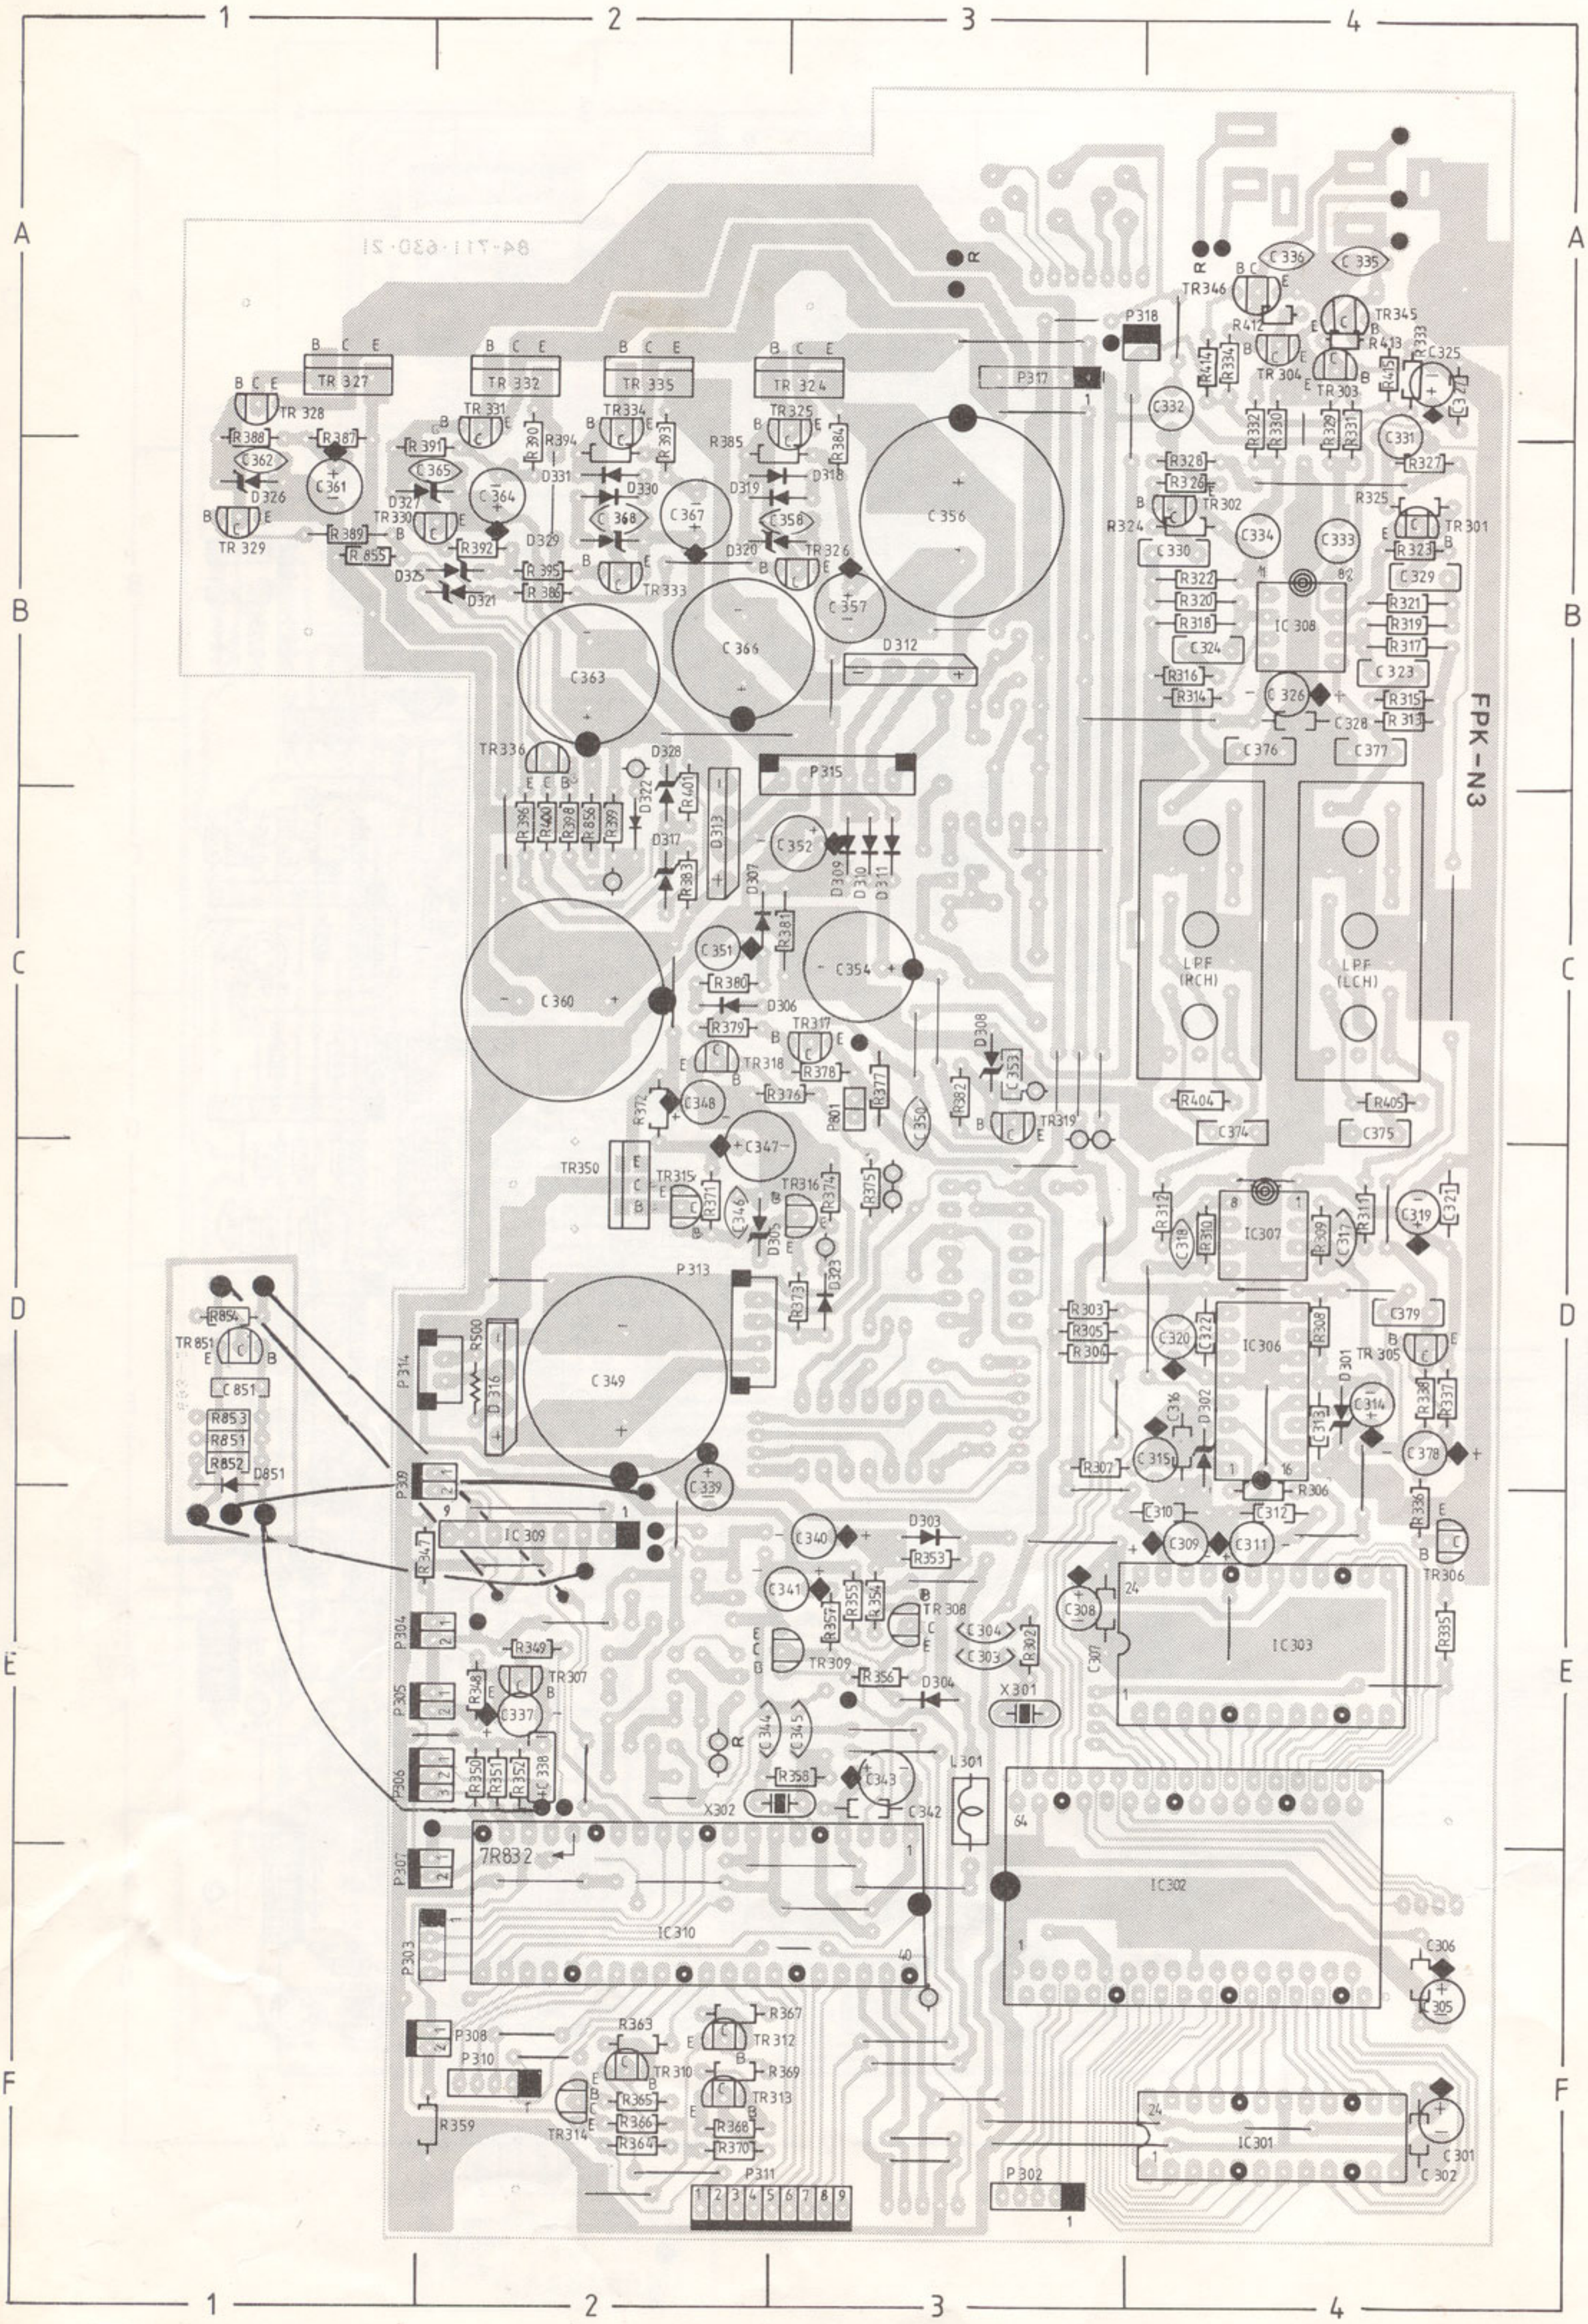
FPK-N3
TR 327
TR 328
TR 329
TR 332
TR 331
TR 330
TR 335
TR334
TR333
TR 324
TR325
TR326
TR336
TR350
TR315
TR316
TR317
TR318
TR319
TR 304
TR303
TR302
TR301
TR851
TR 305
TR306
TR307
TR309
TR 308
TR310
TR312
TR313
TR314
IC 308
IC307
IC306
IC303
IC309
IC310
IC302
IC301
LPF (RCH)
LPF (LCH)
P318
P317
P315
P313
P314
P309
P304
P305
P306
P307
P303
P308
P310
P311
P302
X301
X302
L301
C 336
C 335
C 325
C 332
C 331
C 330
C 334
C 333
C 329
C 324
C 323
C 326
C 328
C 376
C 377
C 356
C 366
C 363
C 357
C 367
C 368
C 364
C 365
C 362
C 361
C 358
C 360
C 354
C 352
C 351
C 348
C 347
C 349
C 339
C 340
C 341
C 337
C 338
C 343
C 342
C 344
C 345
C 346
C 319
C 321
C 320
C 322
C 379
C 316
C 315
C 314
C 313
C 318
C 317
C 312
C 310
C 309
C 311
C 308
C 307
C 306
C 305
C 304
C 303
C 302
C 301
C 851
D 312
D 328
D 322
D 313
D 317
D 307
D 309
D 310
D 311
D 306
D 308
D 305
D 316
D 303
D 304
D 851
D 326
D 327
D 325
D 321
D 331
D 330
D 329
D 318
D 319
D 320
D 323
D 302
D 301
R 854
R 853
R 851
R 852
R 855
R 500
R 388
R 387
R 389
R 391
R 390
R 394
R 393
R 385
R 384
R 392
R 395
R 386
R 396
R 400
R 398
R 850
R 399
R 401
R 383
R 381
R 380
R 379
R 378
R 376
R 377
R 372
R 371
R 374
R 375
R 373
R 382
R 347
R 349
R 348
R 350
R 351
R 352
R 358
R 363
R 367
R 365
R 366
R 364
R 369
R 368
R 370
R 359
R 353
R 355
R 354
R 357
R 356
R 302
R 412
R 414
R 334
R 413
R 415
R 333
R 332
R 330
R 329
R 331
R 328
R 326
R 327
R 325
R 324
R 322
R 320
R 318
R 316
R 314
R 323
R 321
R 319
R 317
R 315
R 313
R 404
R 405
R 374
R 375
R 312
R 310
R 309
R 317
R 319
R 303
R 305
R 304
R 308
R 307
R 306
R 336
R 337
R 338
R 335
R 404
R 405
A
B
C
D
E
F
1
2
3
4

1-6

SERVO The first manufactured products

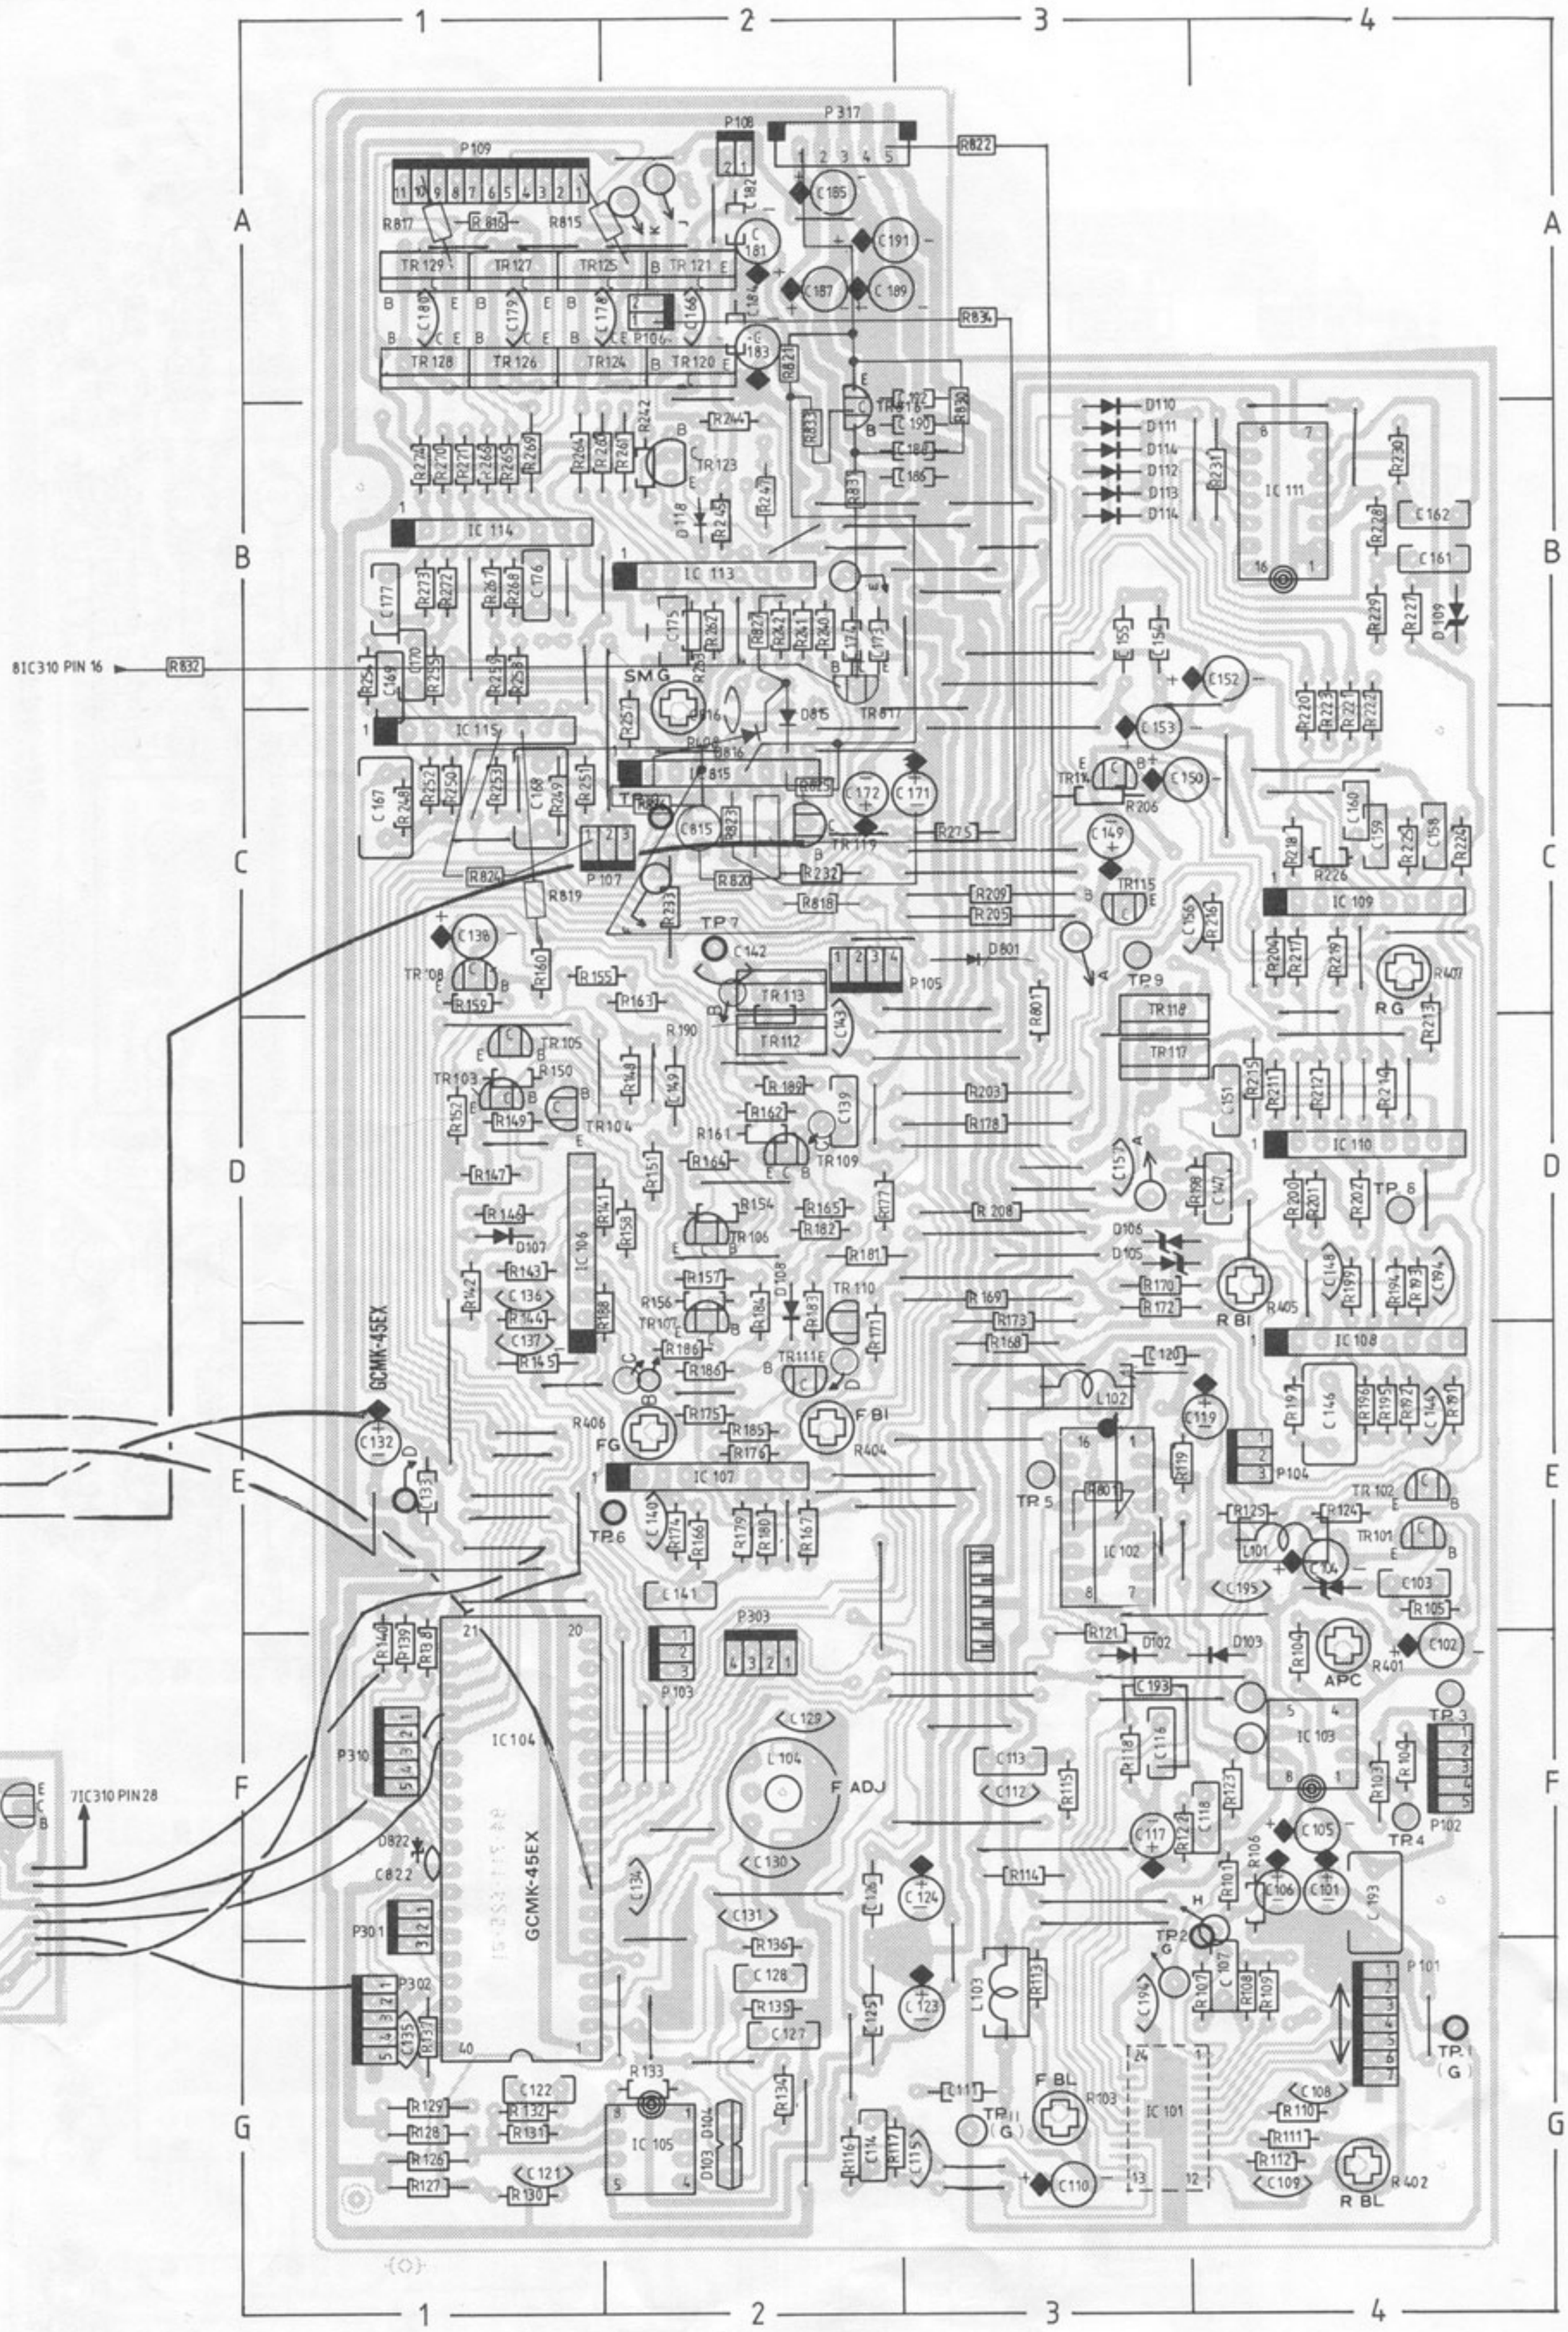

Bang&Olufsen

SERVO

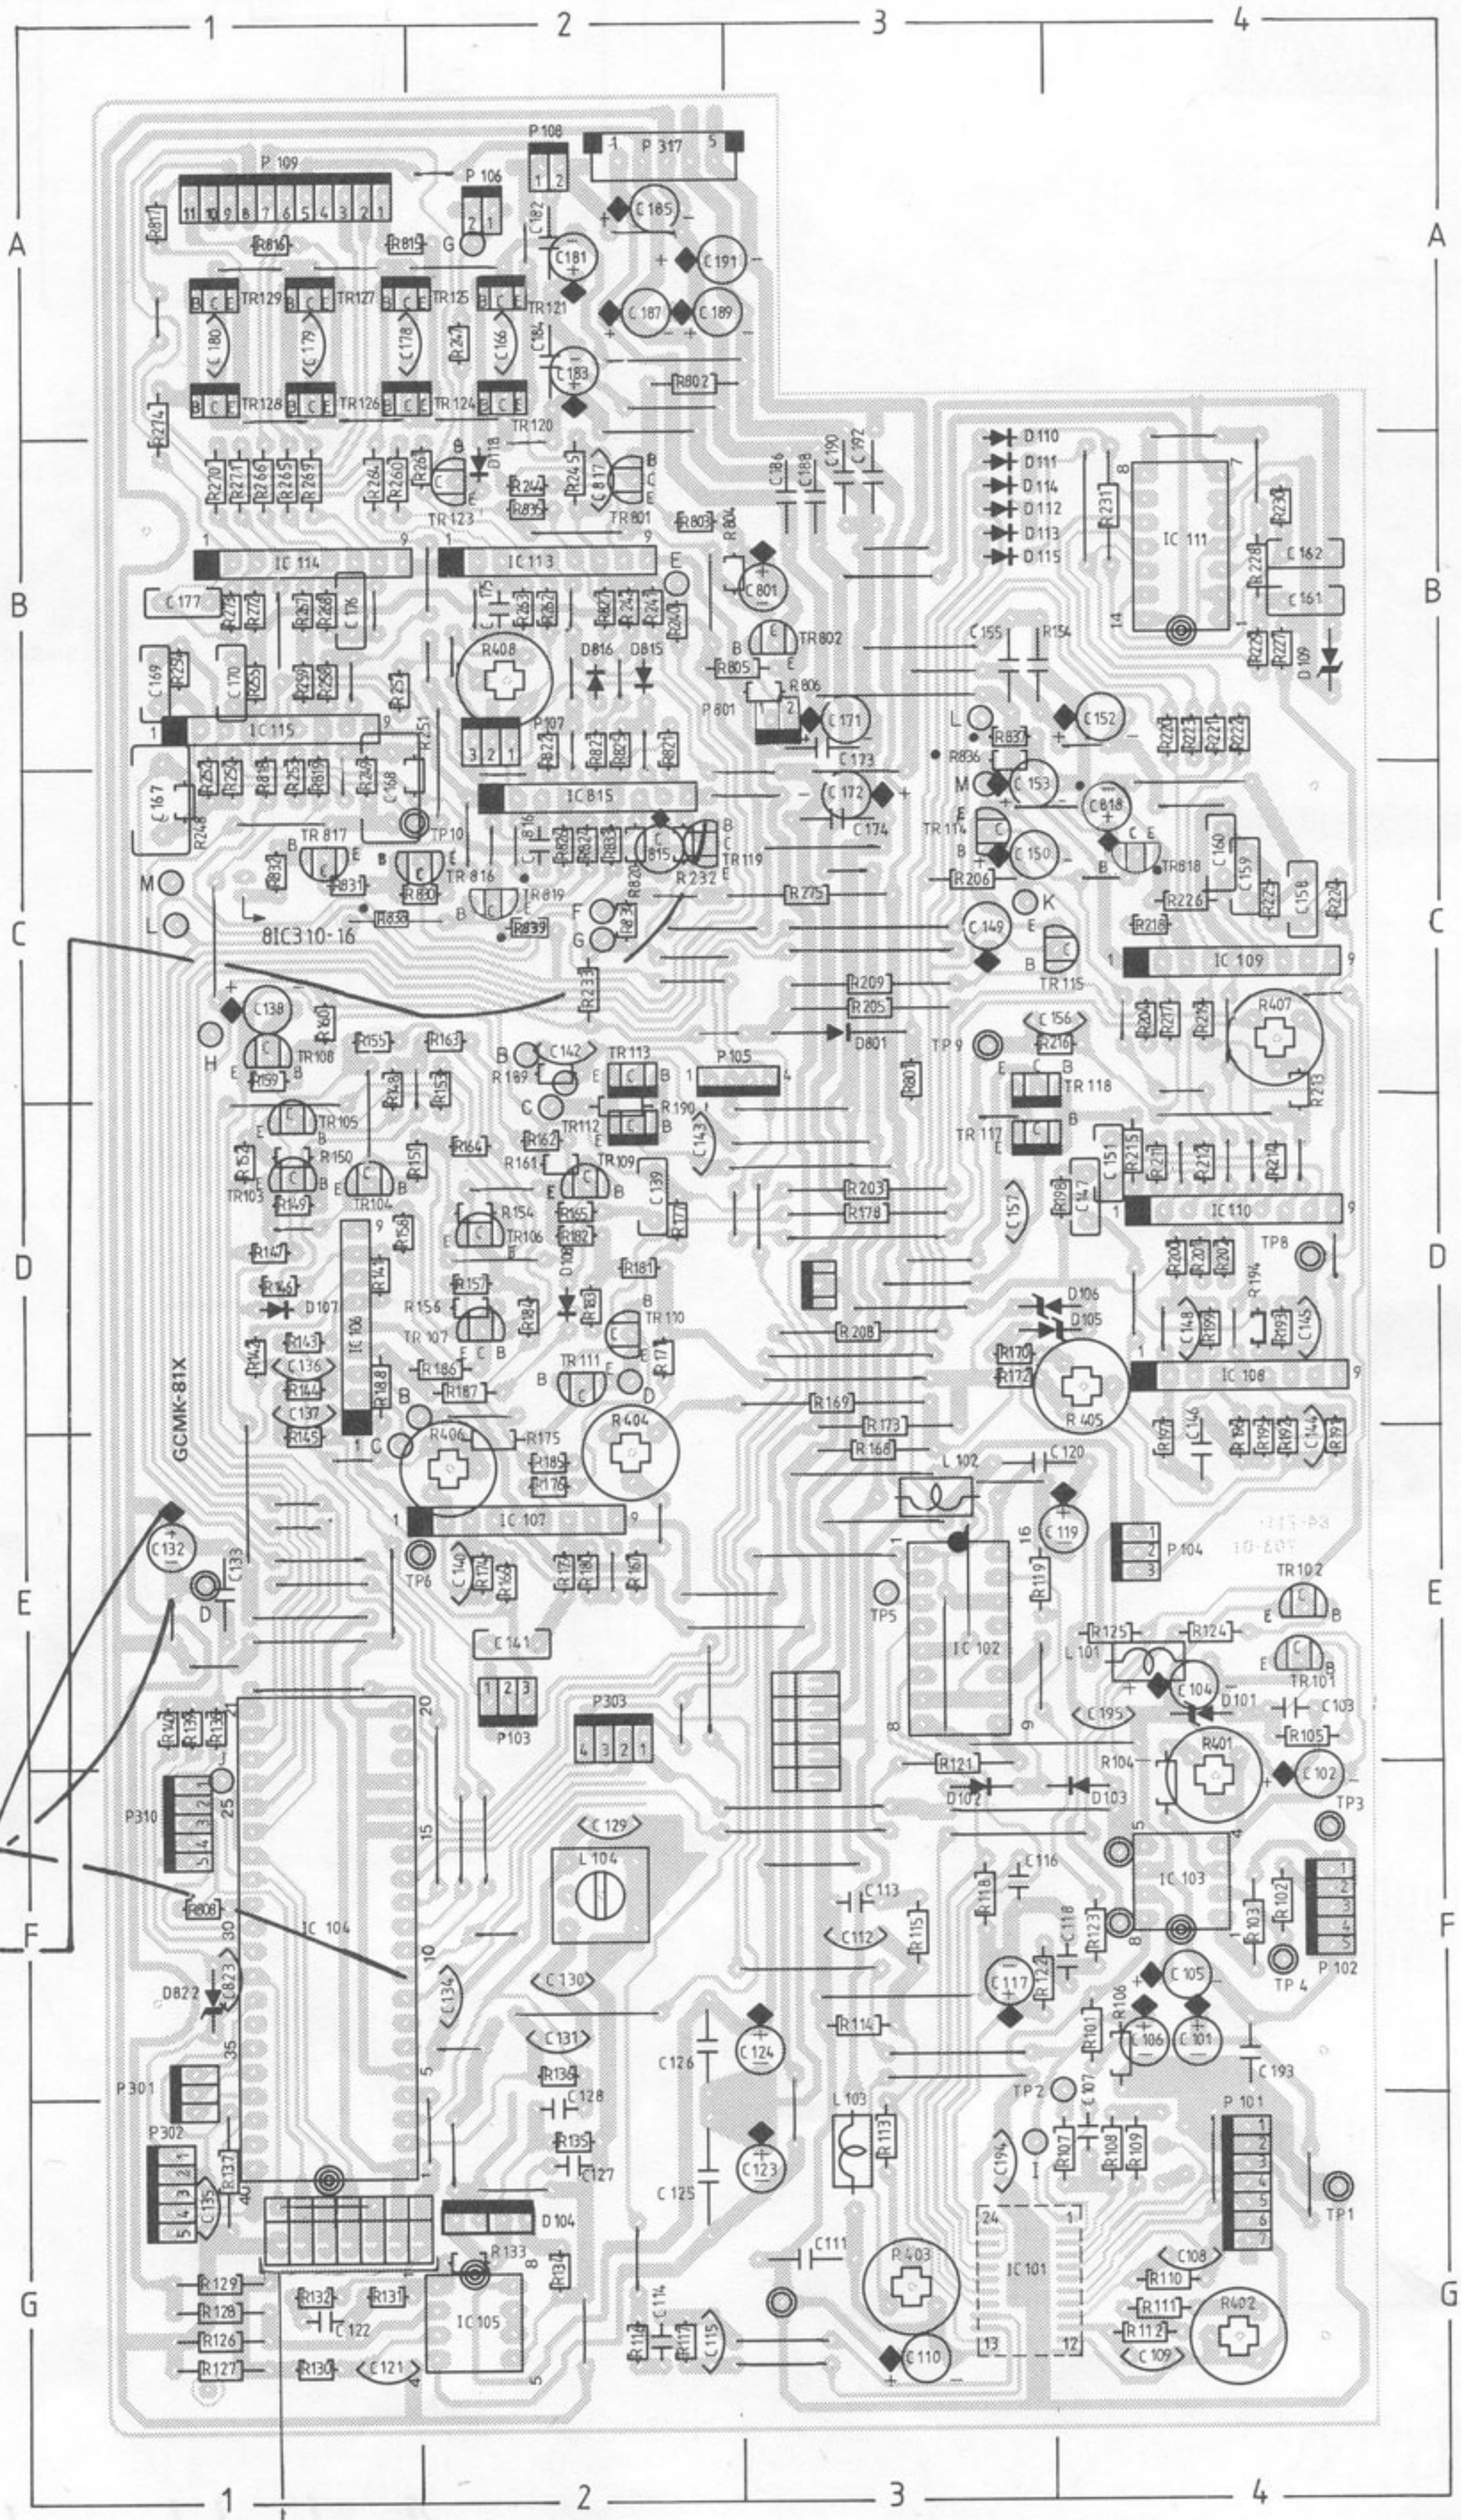

DECODER

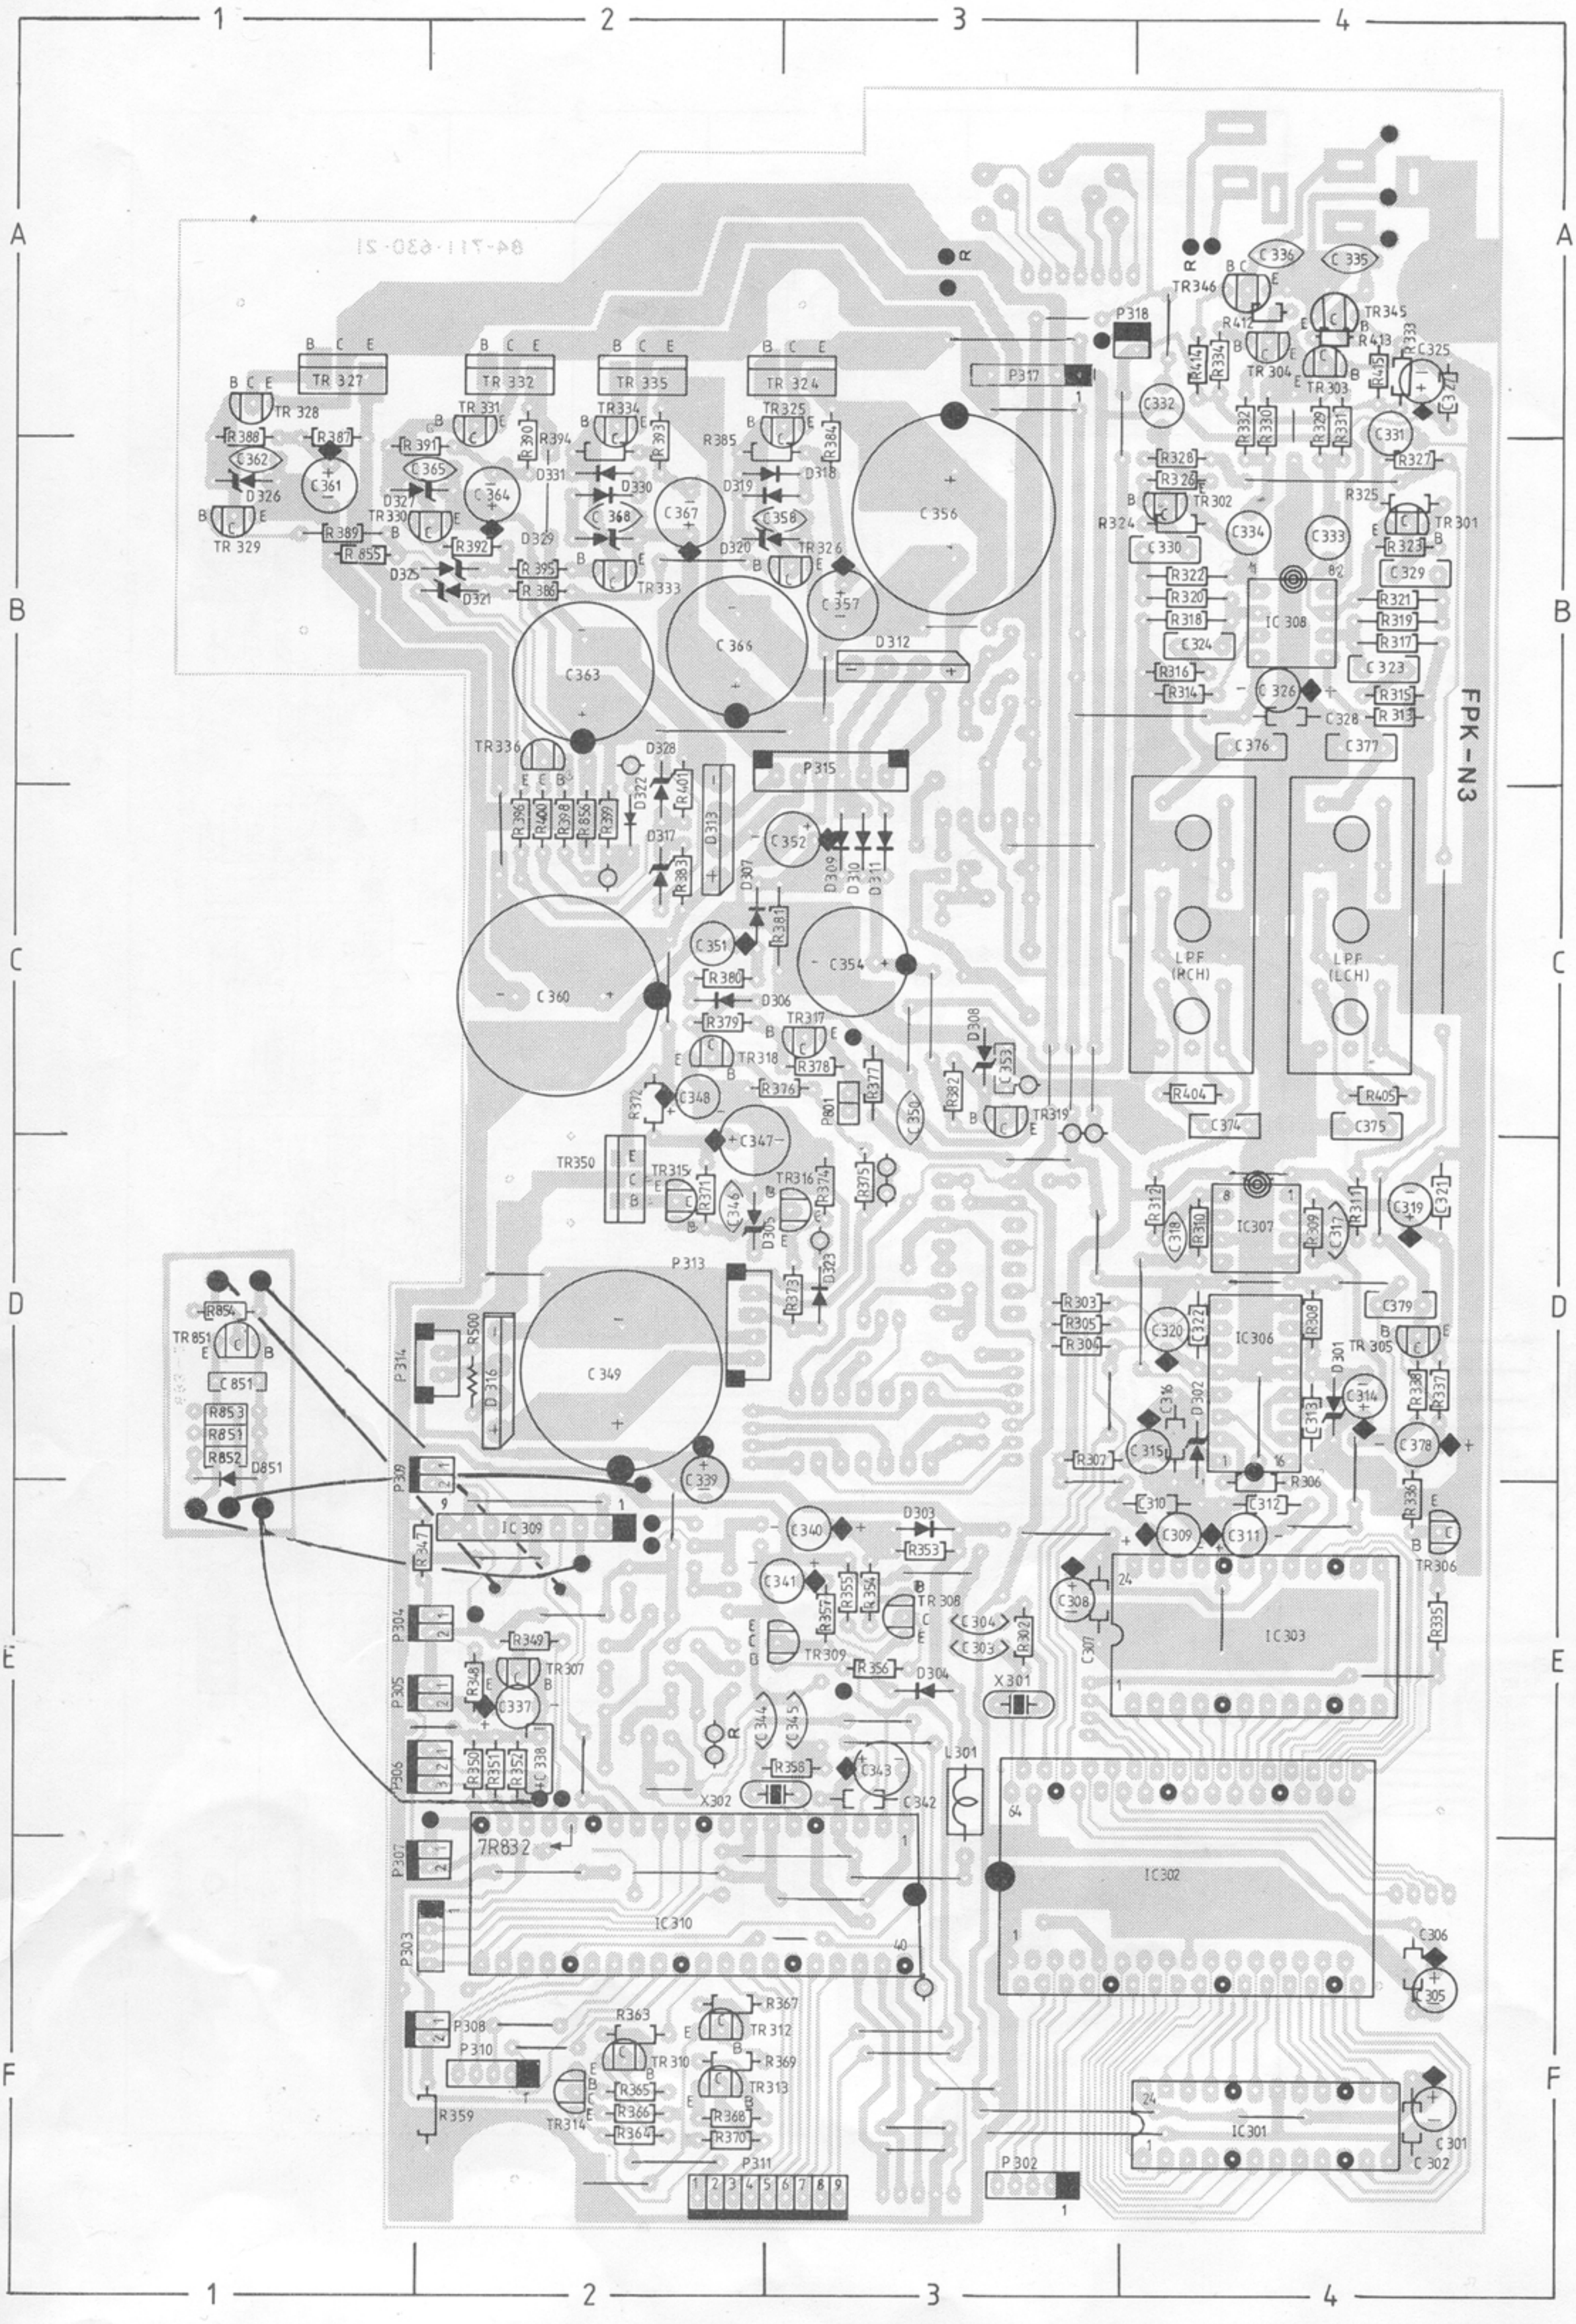
1
2
3
4
A
B
C
D
E
F
FPK-N3
TR 327
TR 328
TR 329
TR 332
TR 331
TR 330
TR 335
TR334
TR333
TR 324
TR325
TR326
TR336
TR317
TR318
TR350
TR315
TR316
TR851
TR307
TR309
TR308
TR319
TR302
TR304
TR303
TR345
TR346
TR301
TR305
TR306
TR310
TR312
TR313
TR314
IC 308
IC307
IC306
IC303
IC309
IC310
IC302
IC301
P318
P317
P315
P313
P314
P309
P304
P305
P306
P307
P303
P308
P310
P311
X301
X302
LPF (RCH)
LPF (LCH)
C 356
C 366
C 363
C 367
C 360
C 354
C 349
C 339
C 352
C 351
C 347
C 348
C 346
C 340
C 341
C 337
C 338
C 343
C 342
C 344
C 345
C 353
C 332
C 335
C 336
C 334
C 333
C 330
C 324
C 326
C 328
C 376
C 377
C 325
C 331
C 329
C 323
C 374
C 375
C 319
C 320
C 322
C 379
C 315
C 316
C 314
C 378
C 310
C 309
C 311
C 308
C 312
C 307
C 304
C 303
C 306
C 305
C 301
C 302
D312
D 331
D 329
D 330
D 327
D 326
D 325
D 321
D 320
D 319
D 318
D 328
D 322
D 317
D 313
D 307
D 309
D 310
D 311
D 306
D 305
D 316
D 851
D 308
D 303
D 304
D 301
D 302
P801
7R832

1-6

SERVO The first manufactured products

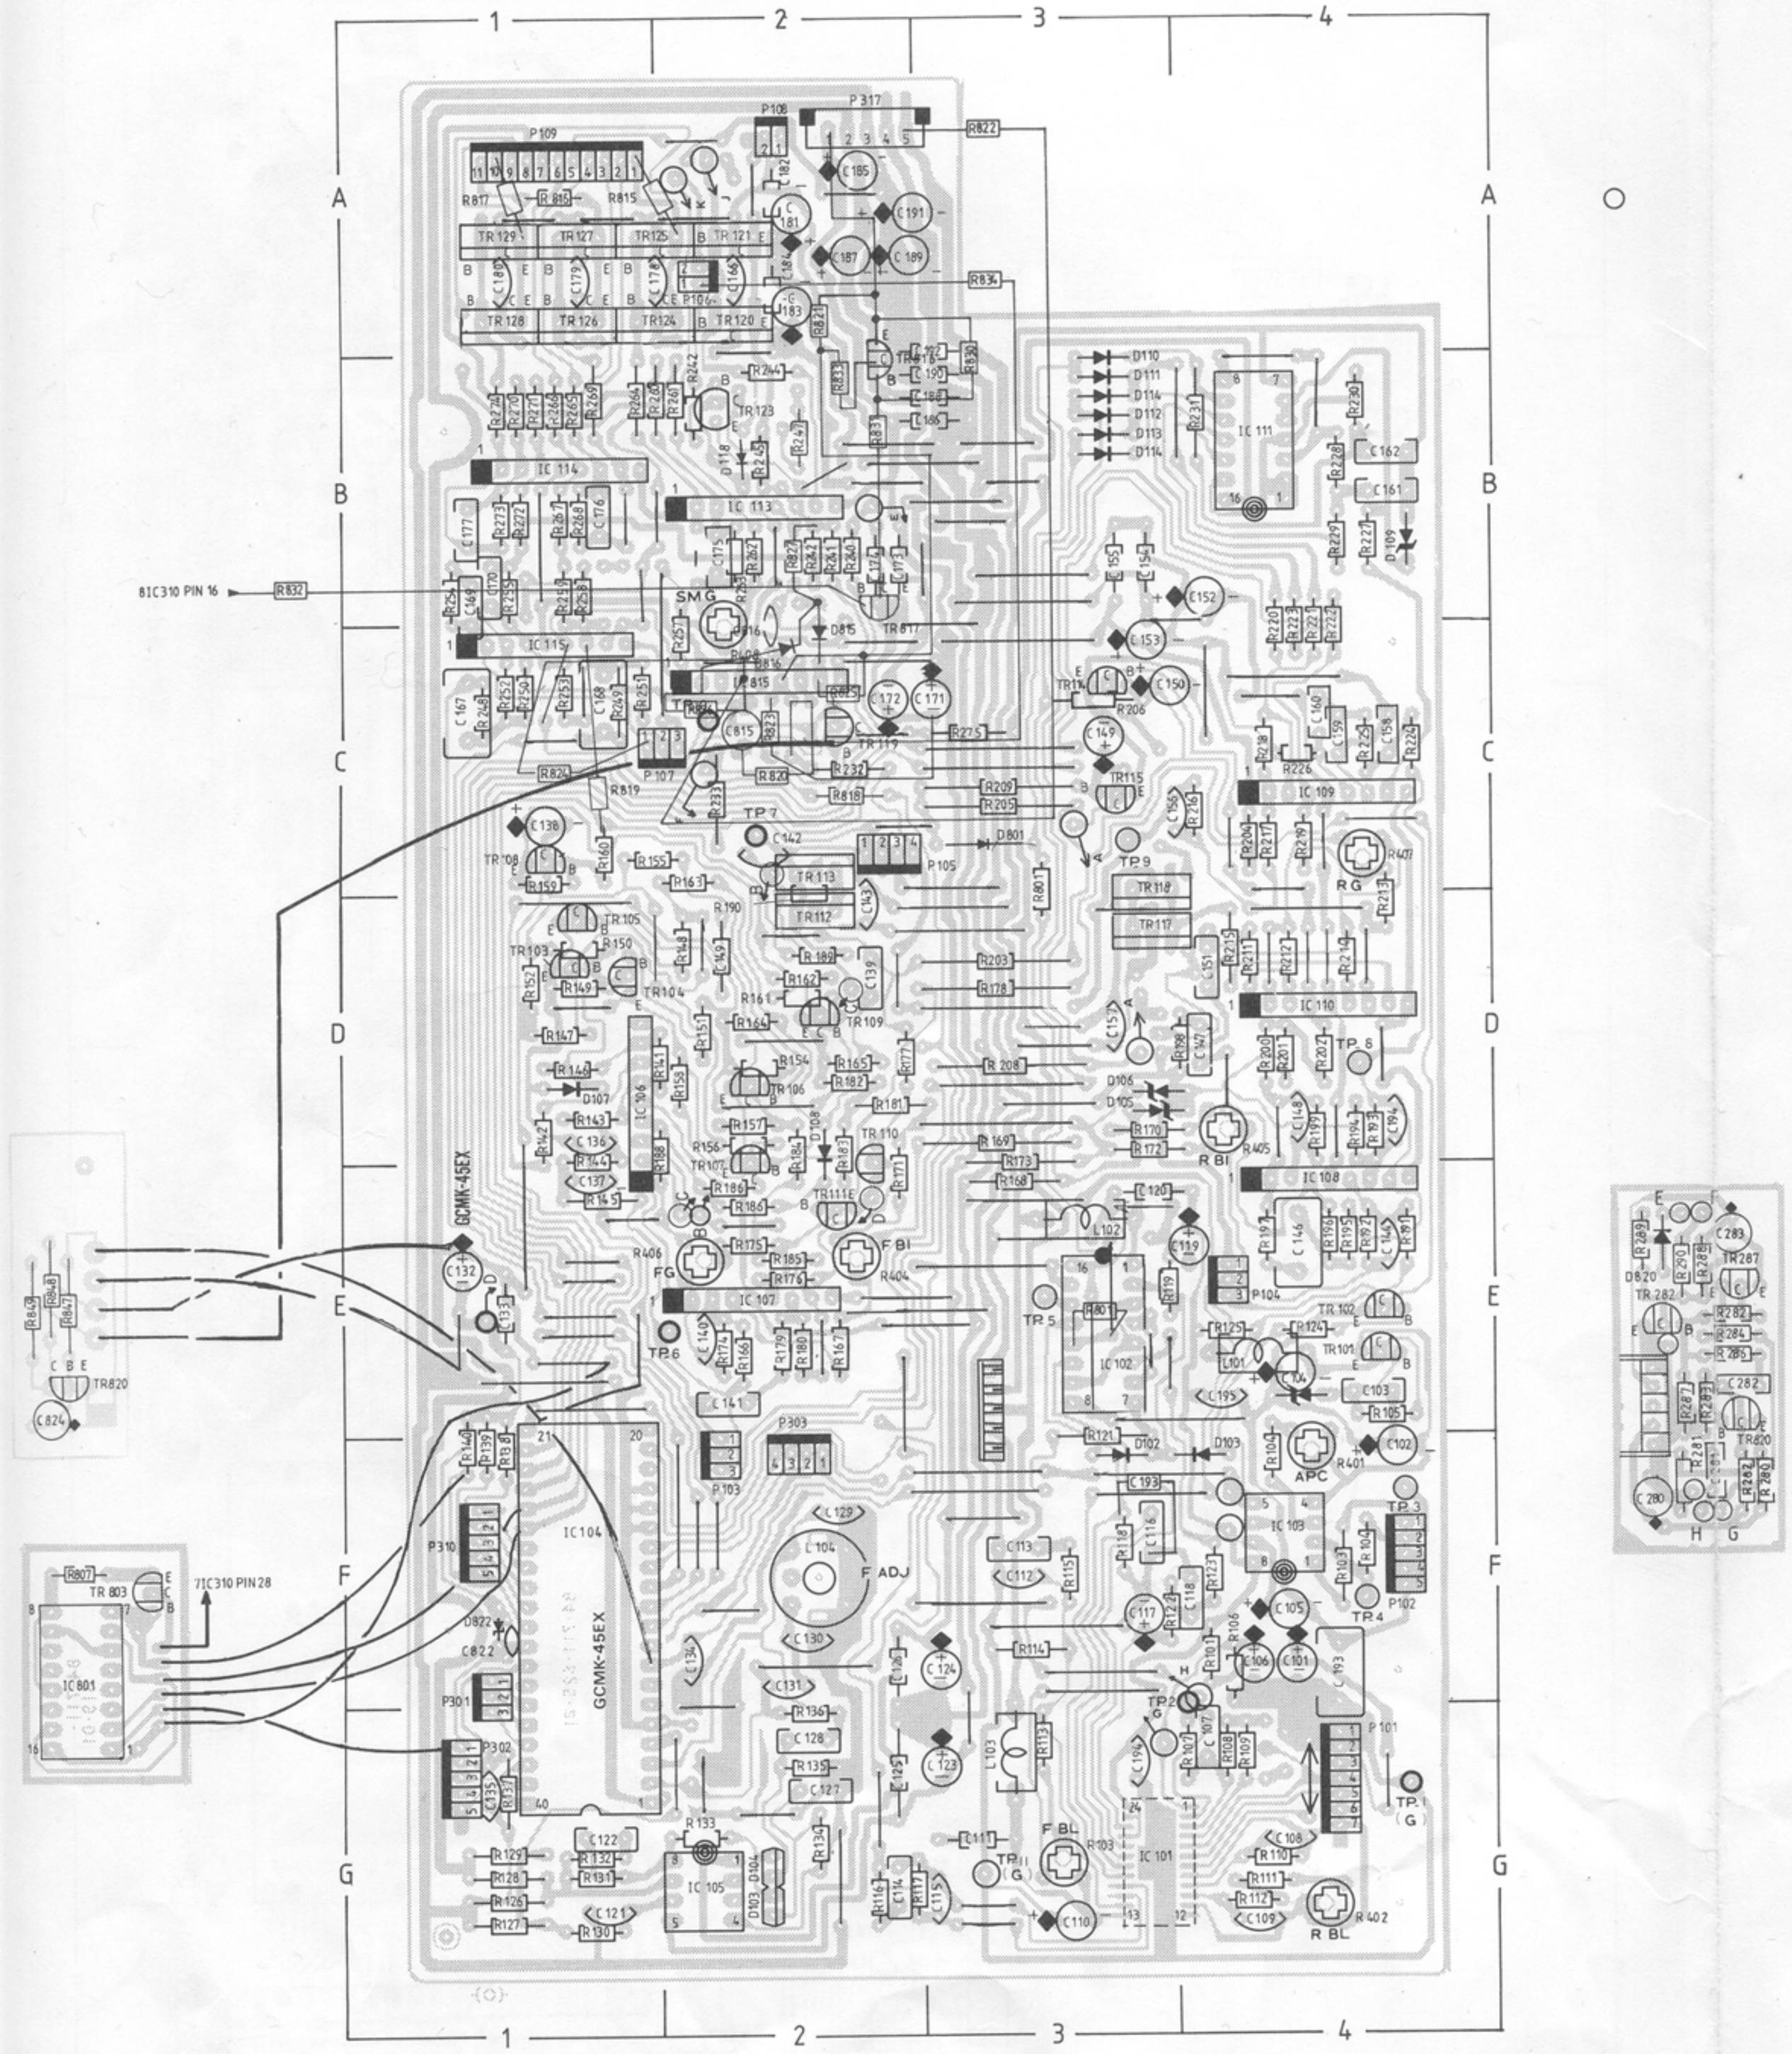
GCMK-45EX
IC310 PIN 16
IC310 PIN 28
P109
P108
P317
P107
P106
P105
P104
P303
P310
P301
P302
P103
IC 114
IC 113
IC 115
IC 107
IC 106
IC 104
IC 105
IC 111
IC 109
IC 110
IC 108
IC 103
IC 102
IC 101
IC 801
TR 803
TR820
SMG
FG
FBI
R BI
R BL
F BL
APC
F ADJ
TP 1 (G)
TP 2 G
TP 3
TP 4
TP 5
TP 6
TP 7
TP 9
R822
R834
R832
R824
R819
R818
R820
R821
R833
R830
R831
R827
R823
R815
R817
R816
R808
R406
R404
R405
R407
R401
R402
R403
C822
D822
D801
D820
D107
D108
D109
D110
D111
D114
D112
D113
D118
D102
D103
D104
D105
D106
TR129
TR127
TR125
TR121
TR128
TR126
TR124
TR120
TR123
TR122
TR116
TR108
TR105
TR103
TR104
TR113
TR112
TR109
TR106
TR107
TR110
TR111
TR114
TR115
TR118
TR117
TR119
TR102
TR101
TR807
TR287
C185
C191
C187
C189
C181
C183
C182
C184
C186
C188
C190
C180
C179
C178
C166
C177
C176
C175
C174
C173
C172
C171
C170
C169
C168
C167
C815
C816
C817
C136
C137
C138
C139
C140
C141
C142
C143
C144
C145
C146
C147
C148
C149
C150
C151
C152
C153
C154
C155
C156
C157
C158
C159
C160
C161
C162
C163
C164
C165
C193
C194
C195
C196
C197
C198
C199
C200
C201
C202

Bang&Olufsen

SERVO

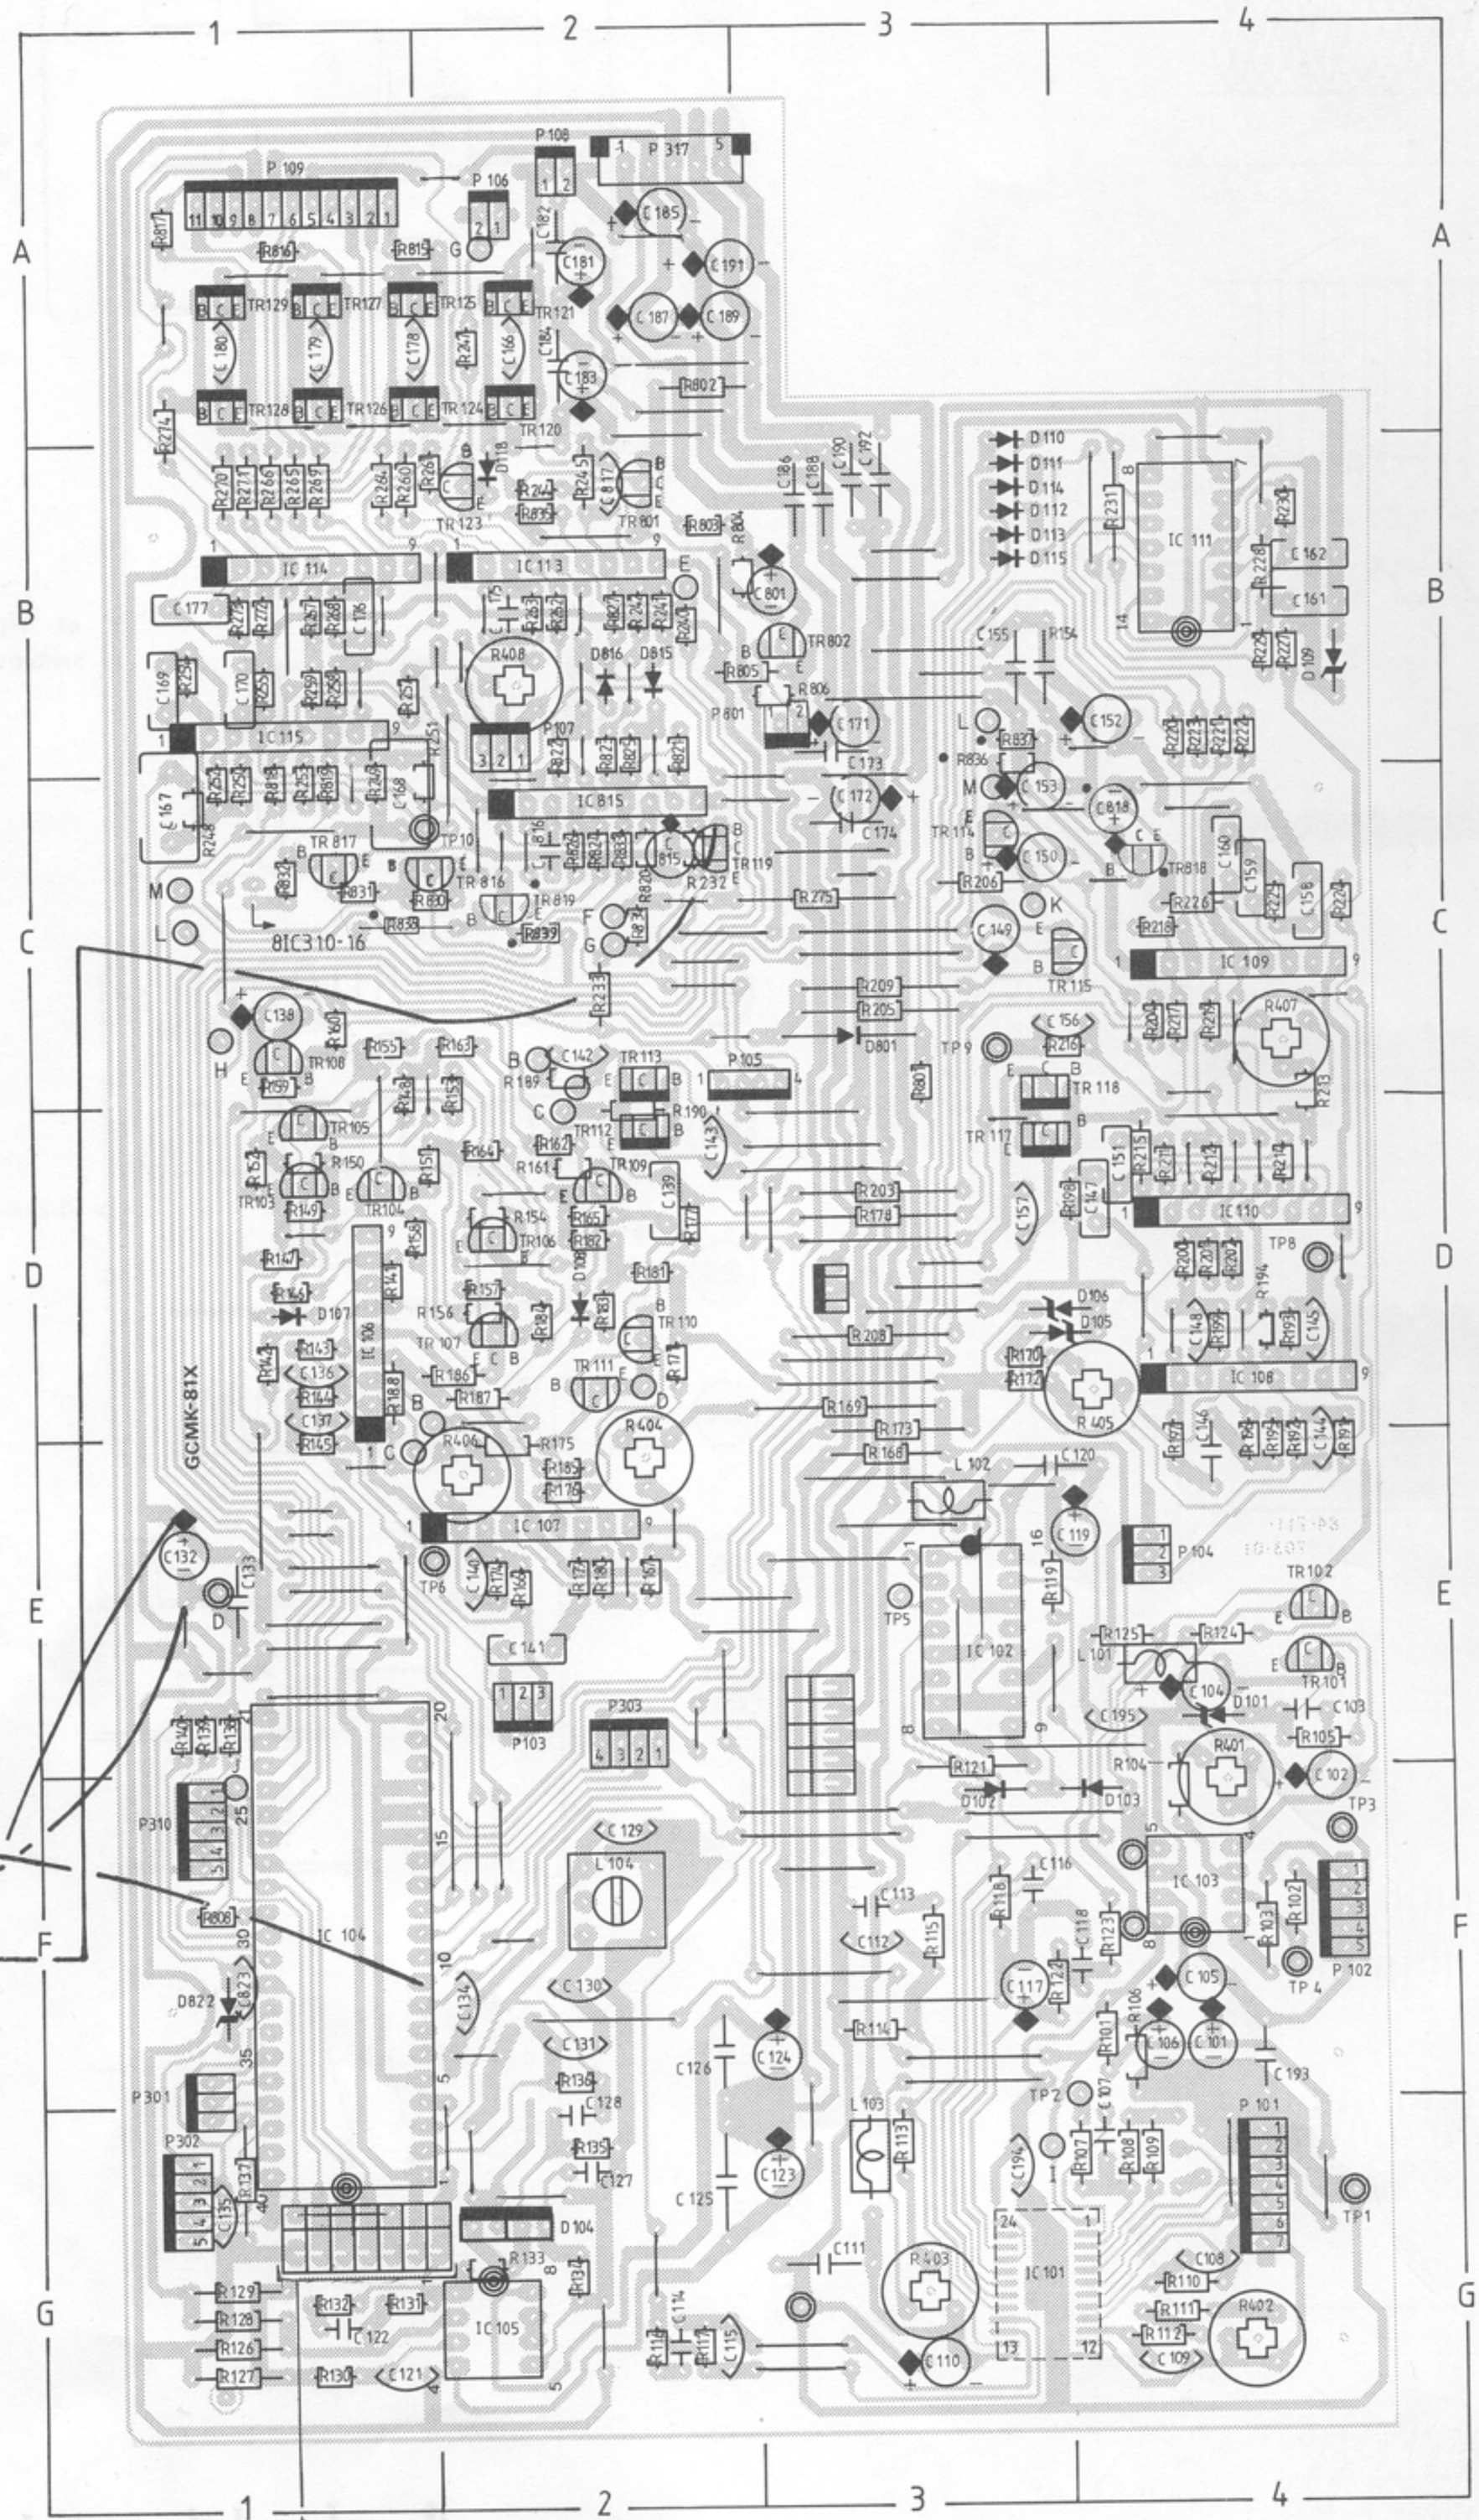

DIAGRAM A Focus & Radial Servo

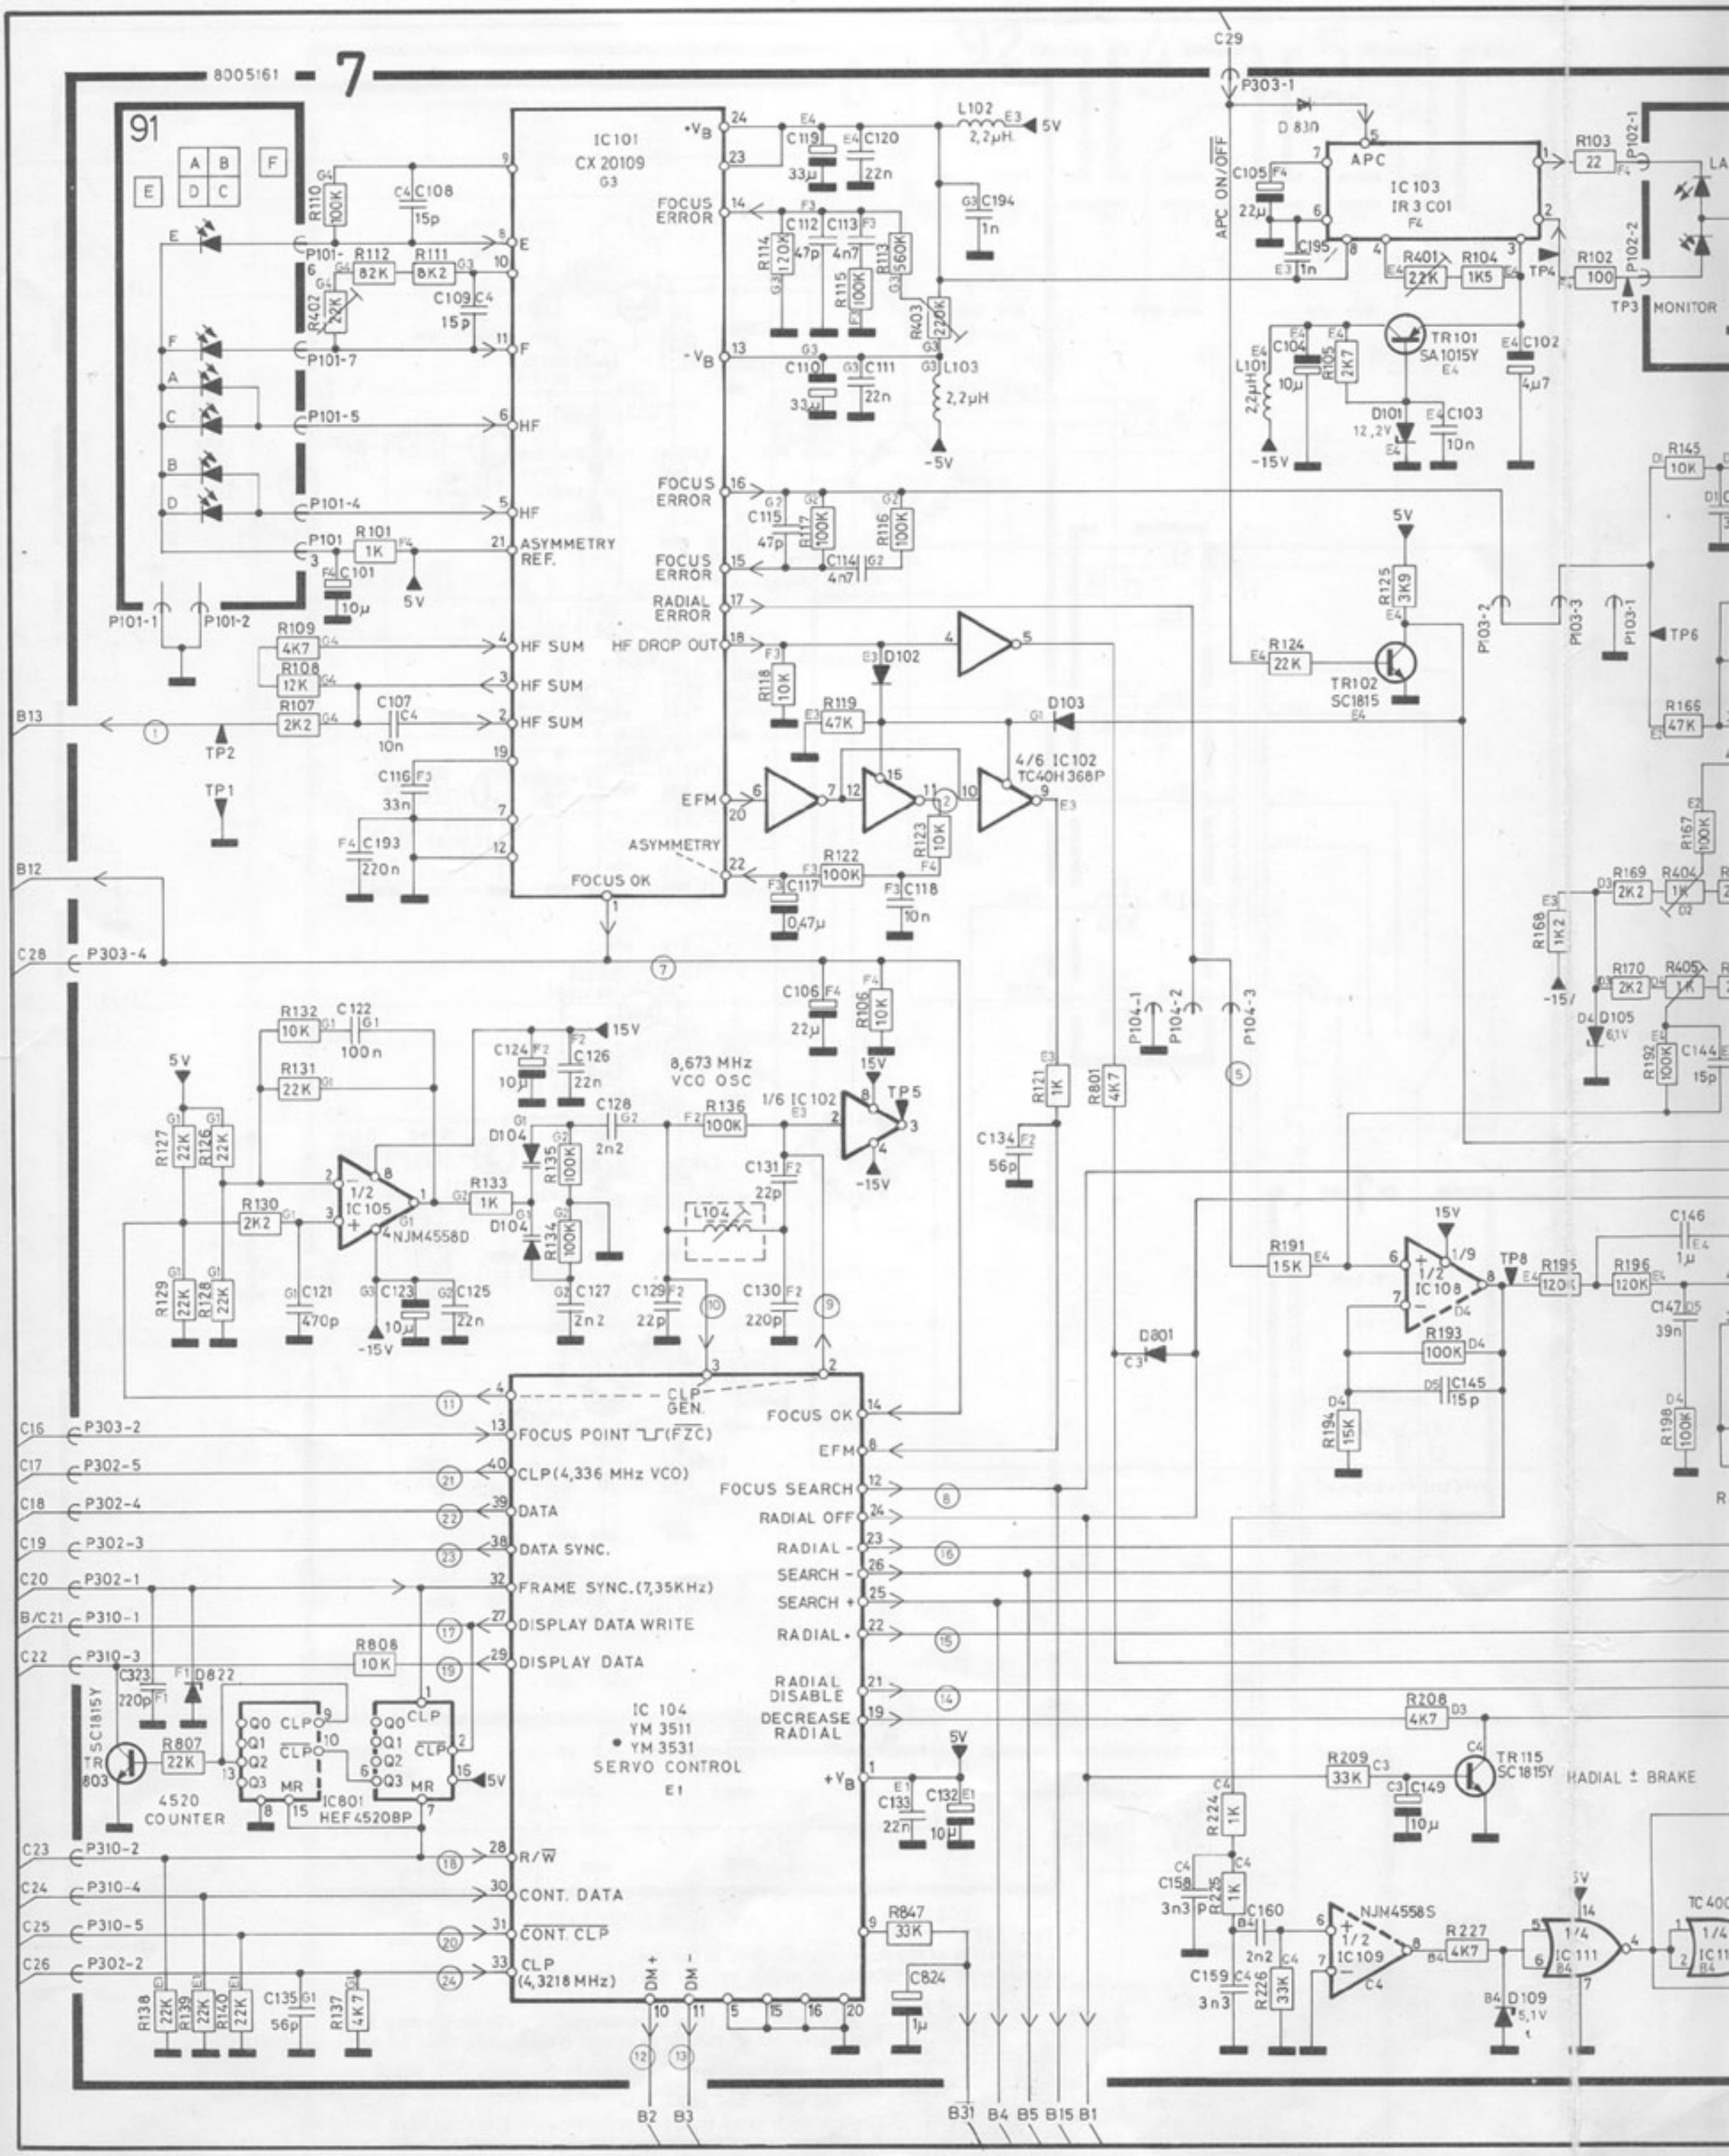

○ Refers to page 1-4

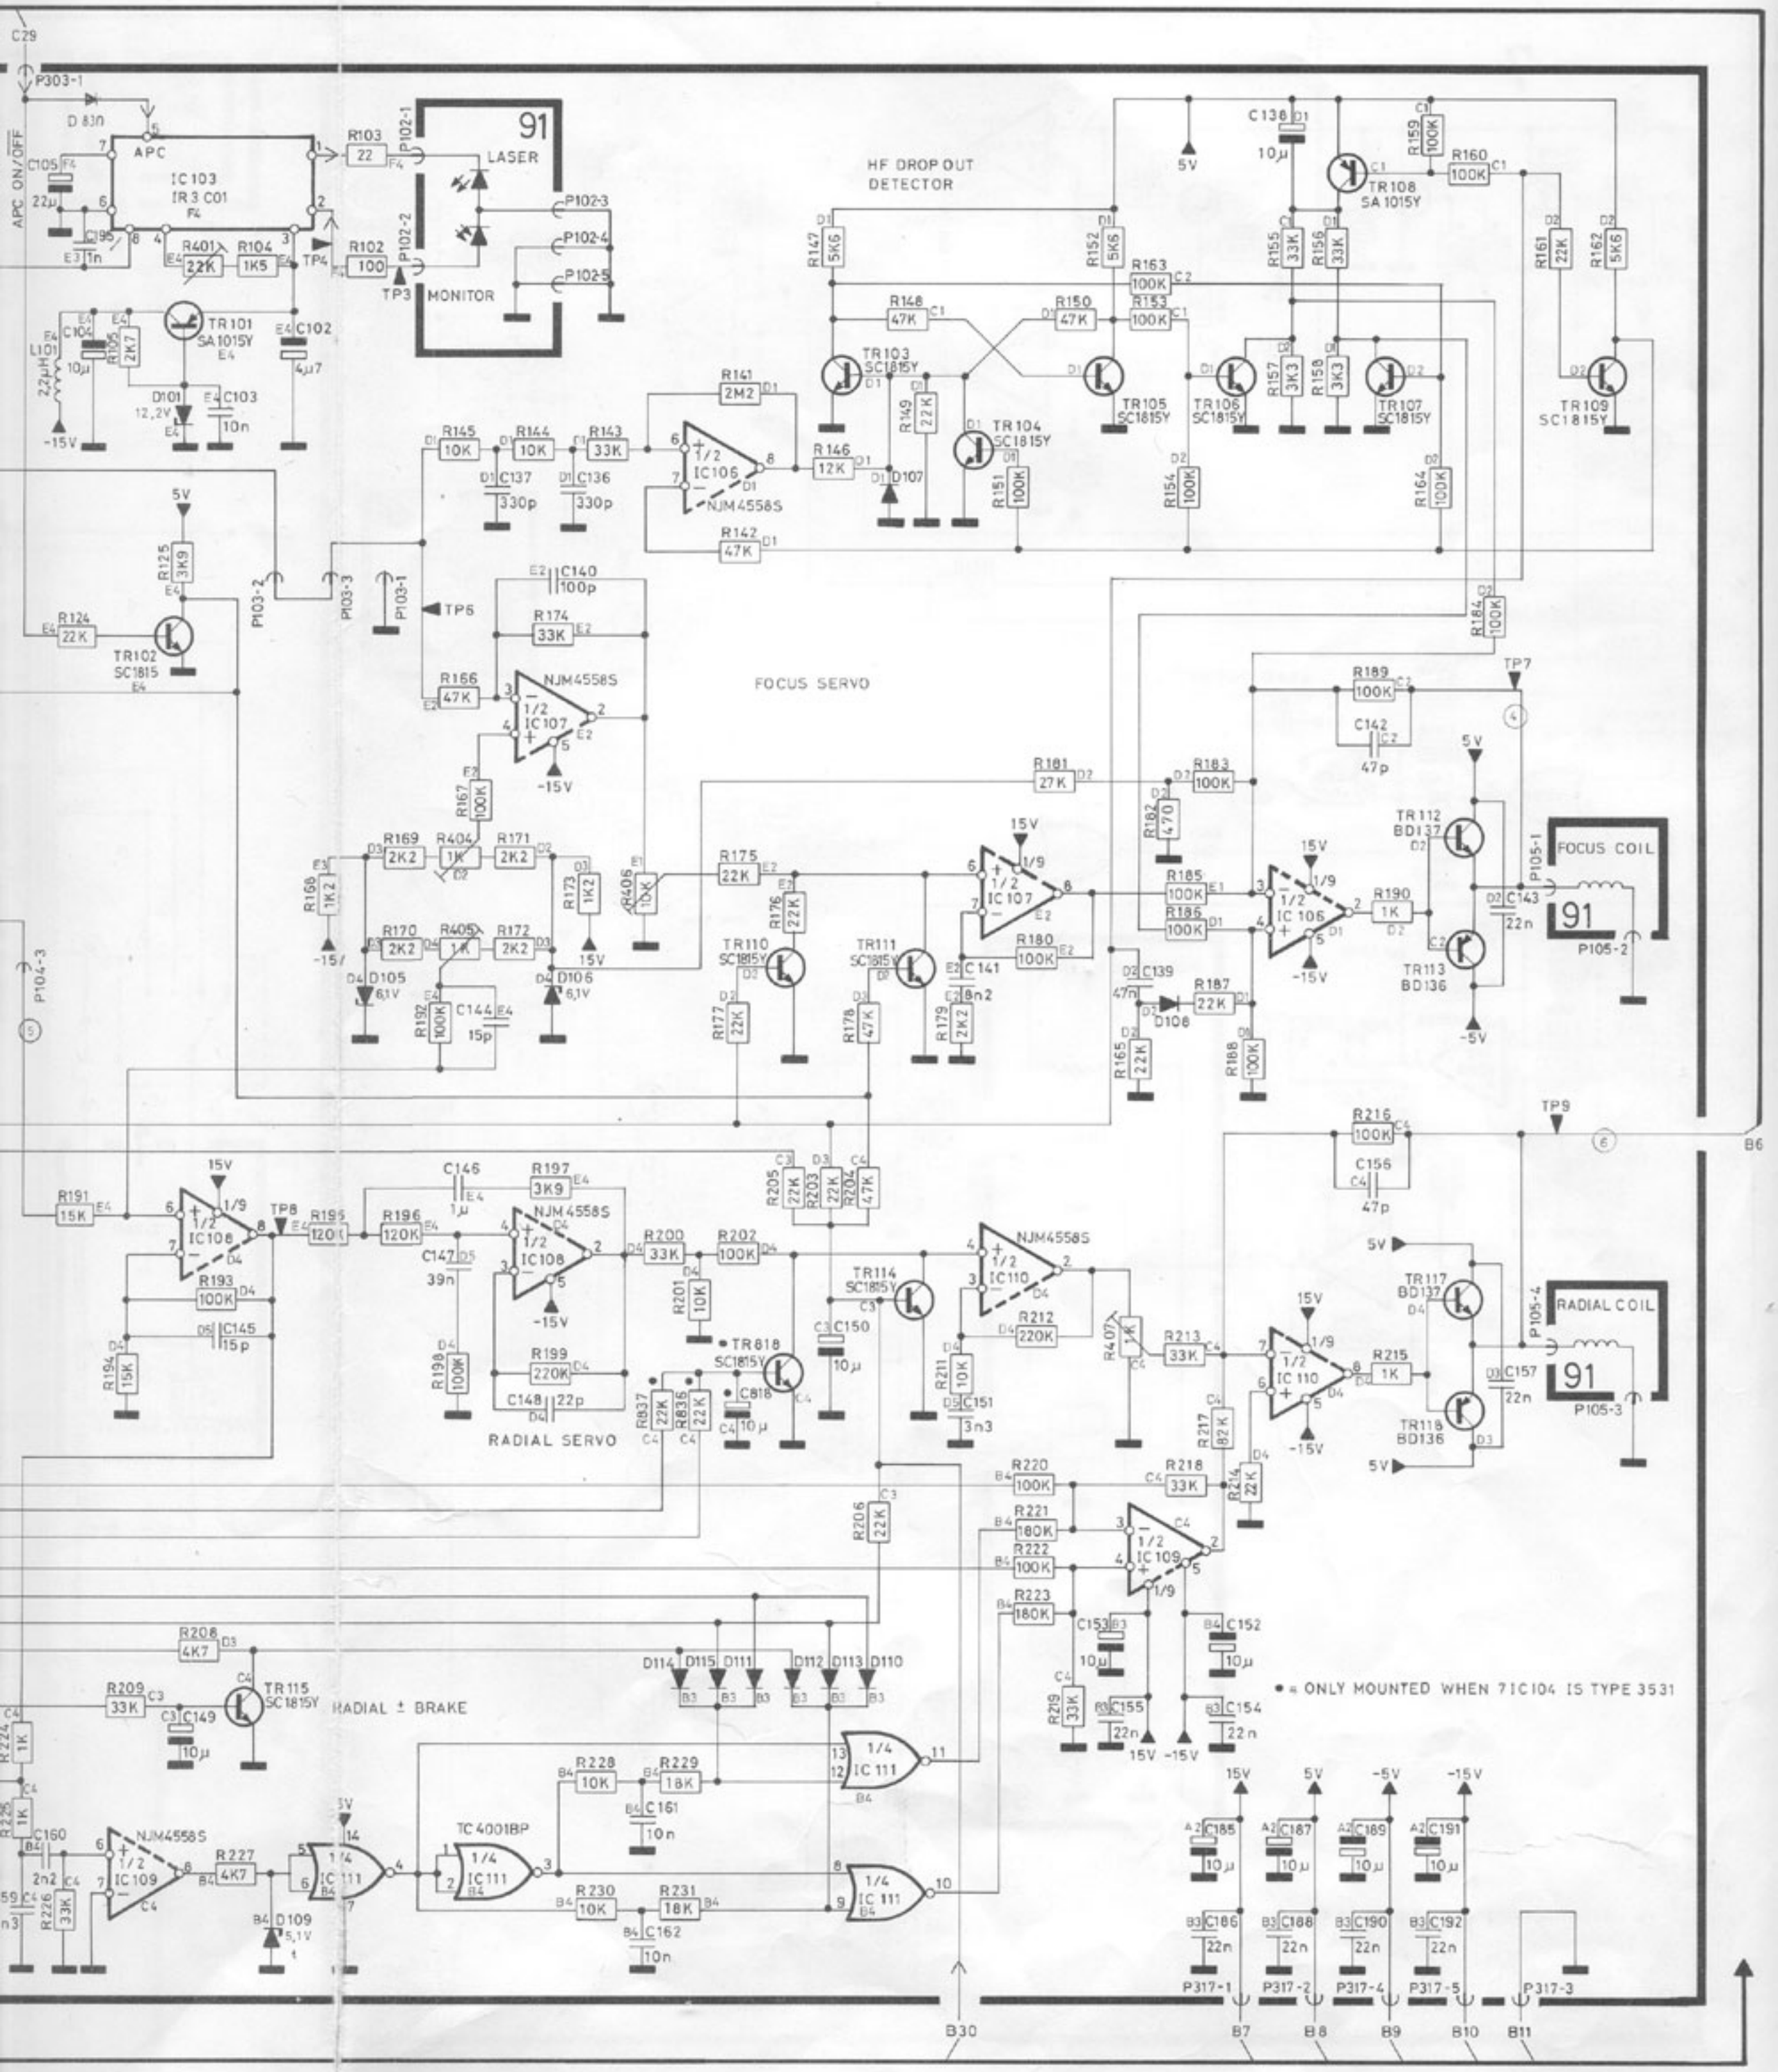
C29
P303-1
D 830
APC ON/OFF
APC
IC 103
IR 3 C01
F4
C105 22µ
R401 22K
R104 1K5
1n
TP4
R103 22
R102 100
P102-1
P102-2
P102-3
P102-4
P102-5
TP3
MONITOR
LASER
91
TR101 SA 1015Y
C102 4µ7
C104 10µ
R105 2K7
L101 2,2µH
D101 12,2V
C103 10n
-15V
5V
R125 3K9
R124 22K
TR102 SC1815
P103-2
P103-3
P103-1
TP5
HF DROP OUT DETECTOR
R147 5K6
R152 5K6
R148 47K
R150 47K
R163 100K
R153 100K
TR103 SC1815Y
TR104 SC1815Y
TR105 SC1815Y
R149 22K
R151 100K
R141 2M2
R145 10K
R144 10K
R143 33K
C137 330p
C136 330p
IC106 1/2 NJM4558S
R146 12K
D107
R142 47K
C136 10µ
TR108 SA 1015Y
R159 100K
R160 100K
R155 33K
R156 33K
TR106 SC1815Y
TR107 SC1815Y
R157 3K3
R158 3K3
R161 22K
R162 5K6
TR109 SC1815Y
R154 100K
R164 100K
R184 100K
C140 100p
R174 33K
R166 47K
NJM4558S
IC107 1/2
-15V
FOCUS SERVO
TP7
R189 100K
C142 47p
R167 100K
R169 2K2
R404 1K
R171 2K2
R166 1K2
R173 1K2
R170 2K2
R405 1K
R172 2K2
D105 6,1V
D106 6,1V
R192 100K
C144 15p
R406 10K
R175 22K
R176 22K
TR110 SC1815Y
TR111 SC1815Y
R177 22K
R178 47K
R179 2K2
C141 3n2
R180 100K
R181 27K
R183 100K
R182 470
R185 100K
R186 100K
C139 47p
D108
R187 22K
R188 100K
R165 22K
IC 107 1/9
IC 106 1/9
R190 1K
TR112 BD137
TR113 BD136
C143 22n
FOCUS COIL
P105-1
P105-2
P104-3
R216 100K
C156 47p
TP9
B6
R191 15K
R193 100K
C145 15p
R194 15K
TP8
R195 120K
R196 120K
C146 1µ
R197 3K9
C147 39n
R198 100K
R199 220K
C148 22p
NJM4558S
IC108 1/2
R200 33K
R202 100K
R201 10K
TR818 SC1815Y
C818 10µ
C150 10µ
TR114 SC1815Y
R205 22K
R203 22K
R204 47K
R206 22K
R837 22K
R836 22K
RADIAL SERVO
R212 220K
R211 10K
C151 3n3
R407 1K
R213 33K
R217 82K
R214 22K
R215 1K
TR117 BD137
TR118 BD136
C157 22n
RADIAL COIL
P105-4
P105-3
R220 100K
R221 180K
R222 100K
R223 180K
R218 33K
IC109 1/2
C153 10µ
C152 10µ
C155 22n
C154 22n
R219 33K
15V -15V
R206 4K7
R209 33K
TR115 SC1815Y
C149 10µ
RADIAL ± BRAKE
D114 D115 D111 D112 D113 D110
R224 1K
R225 1K
C160 2n2
R226 33K
R227 4K7
TC 4001BP
1/4 IC111
R228 10K
R229 18K
C161 10n
R230 10K
R231 18K
C162 10n
D109 5,1V
C185 10µ
C187 10µ
C189 10µ
C191 10µ
C186 22n
C188 22n
C190 22n
C192 22n
P317-1
P317-2
P317-4
P317-5
P317-3
B7
B8
B9
B10
B11
B30
• = ONLY MOUNTED WHEN 7IC104 IS TYPE 3531

1-8

DIAGRAM B Carrier, Motor, Disc Motor Drive, Power Supply

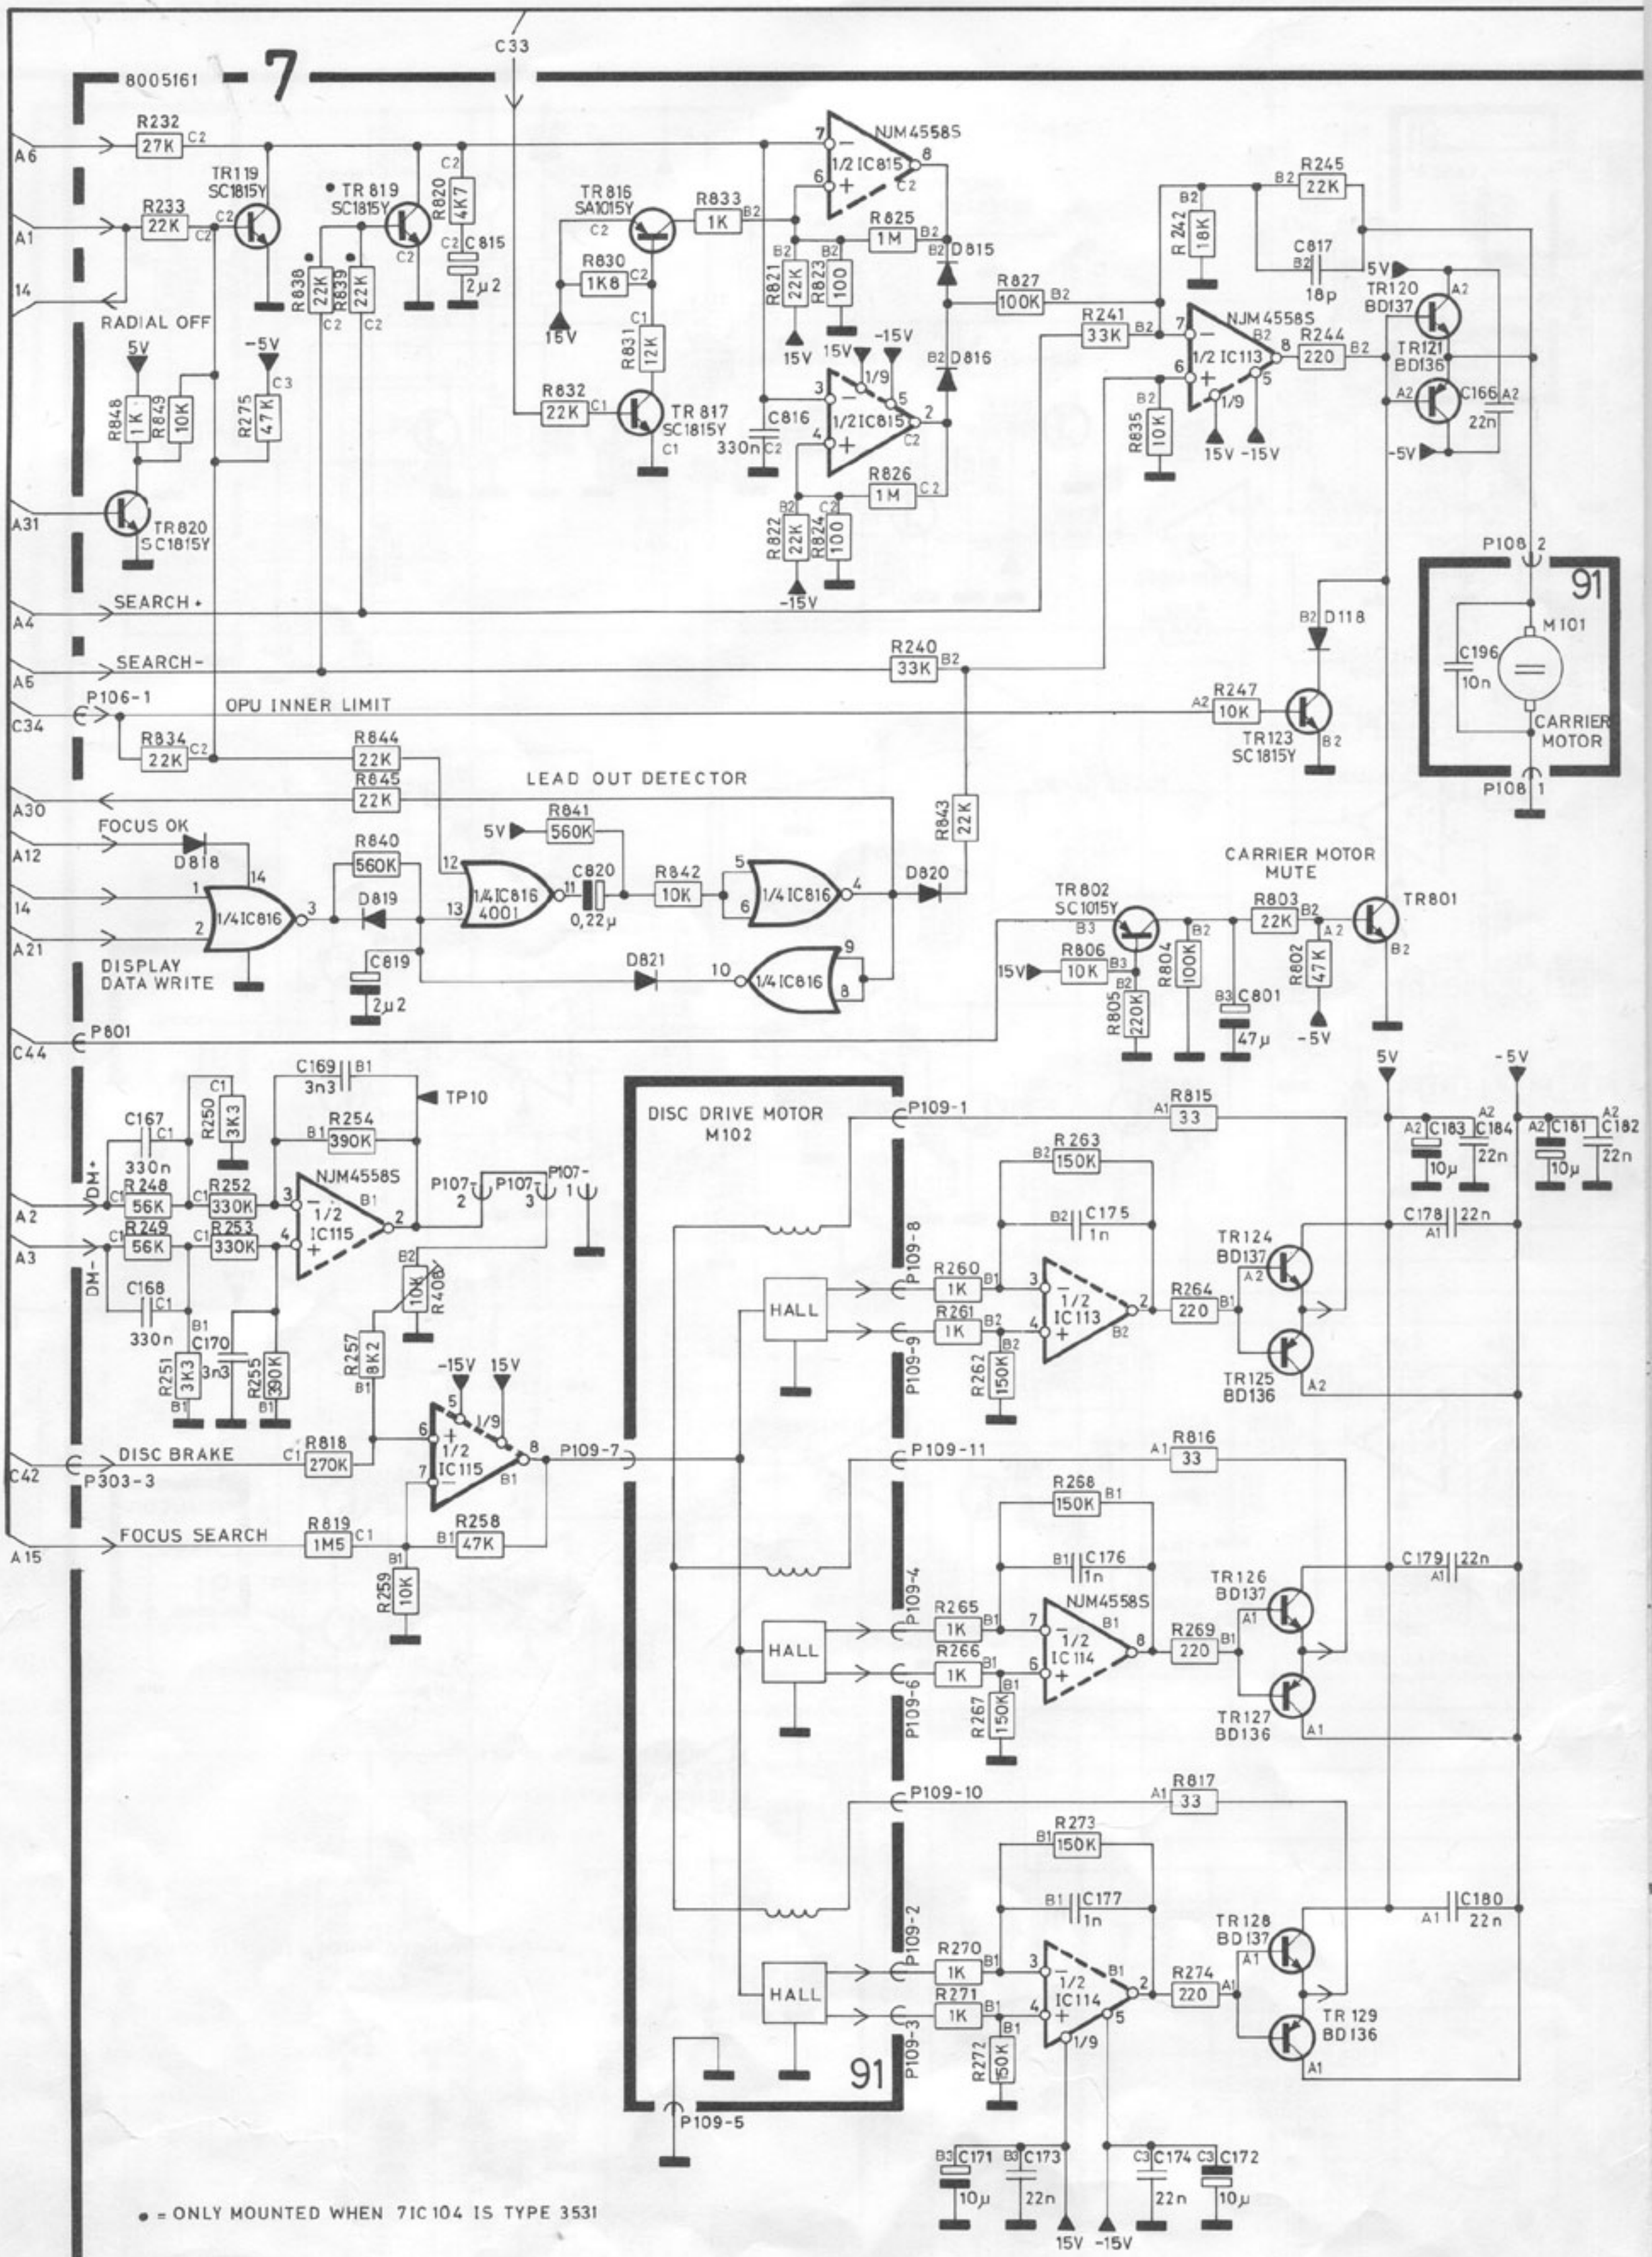

• = ONLY MOUNTED WHEN 71C104 IS TYPE 3531

Bang&Olufsen

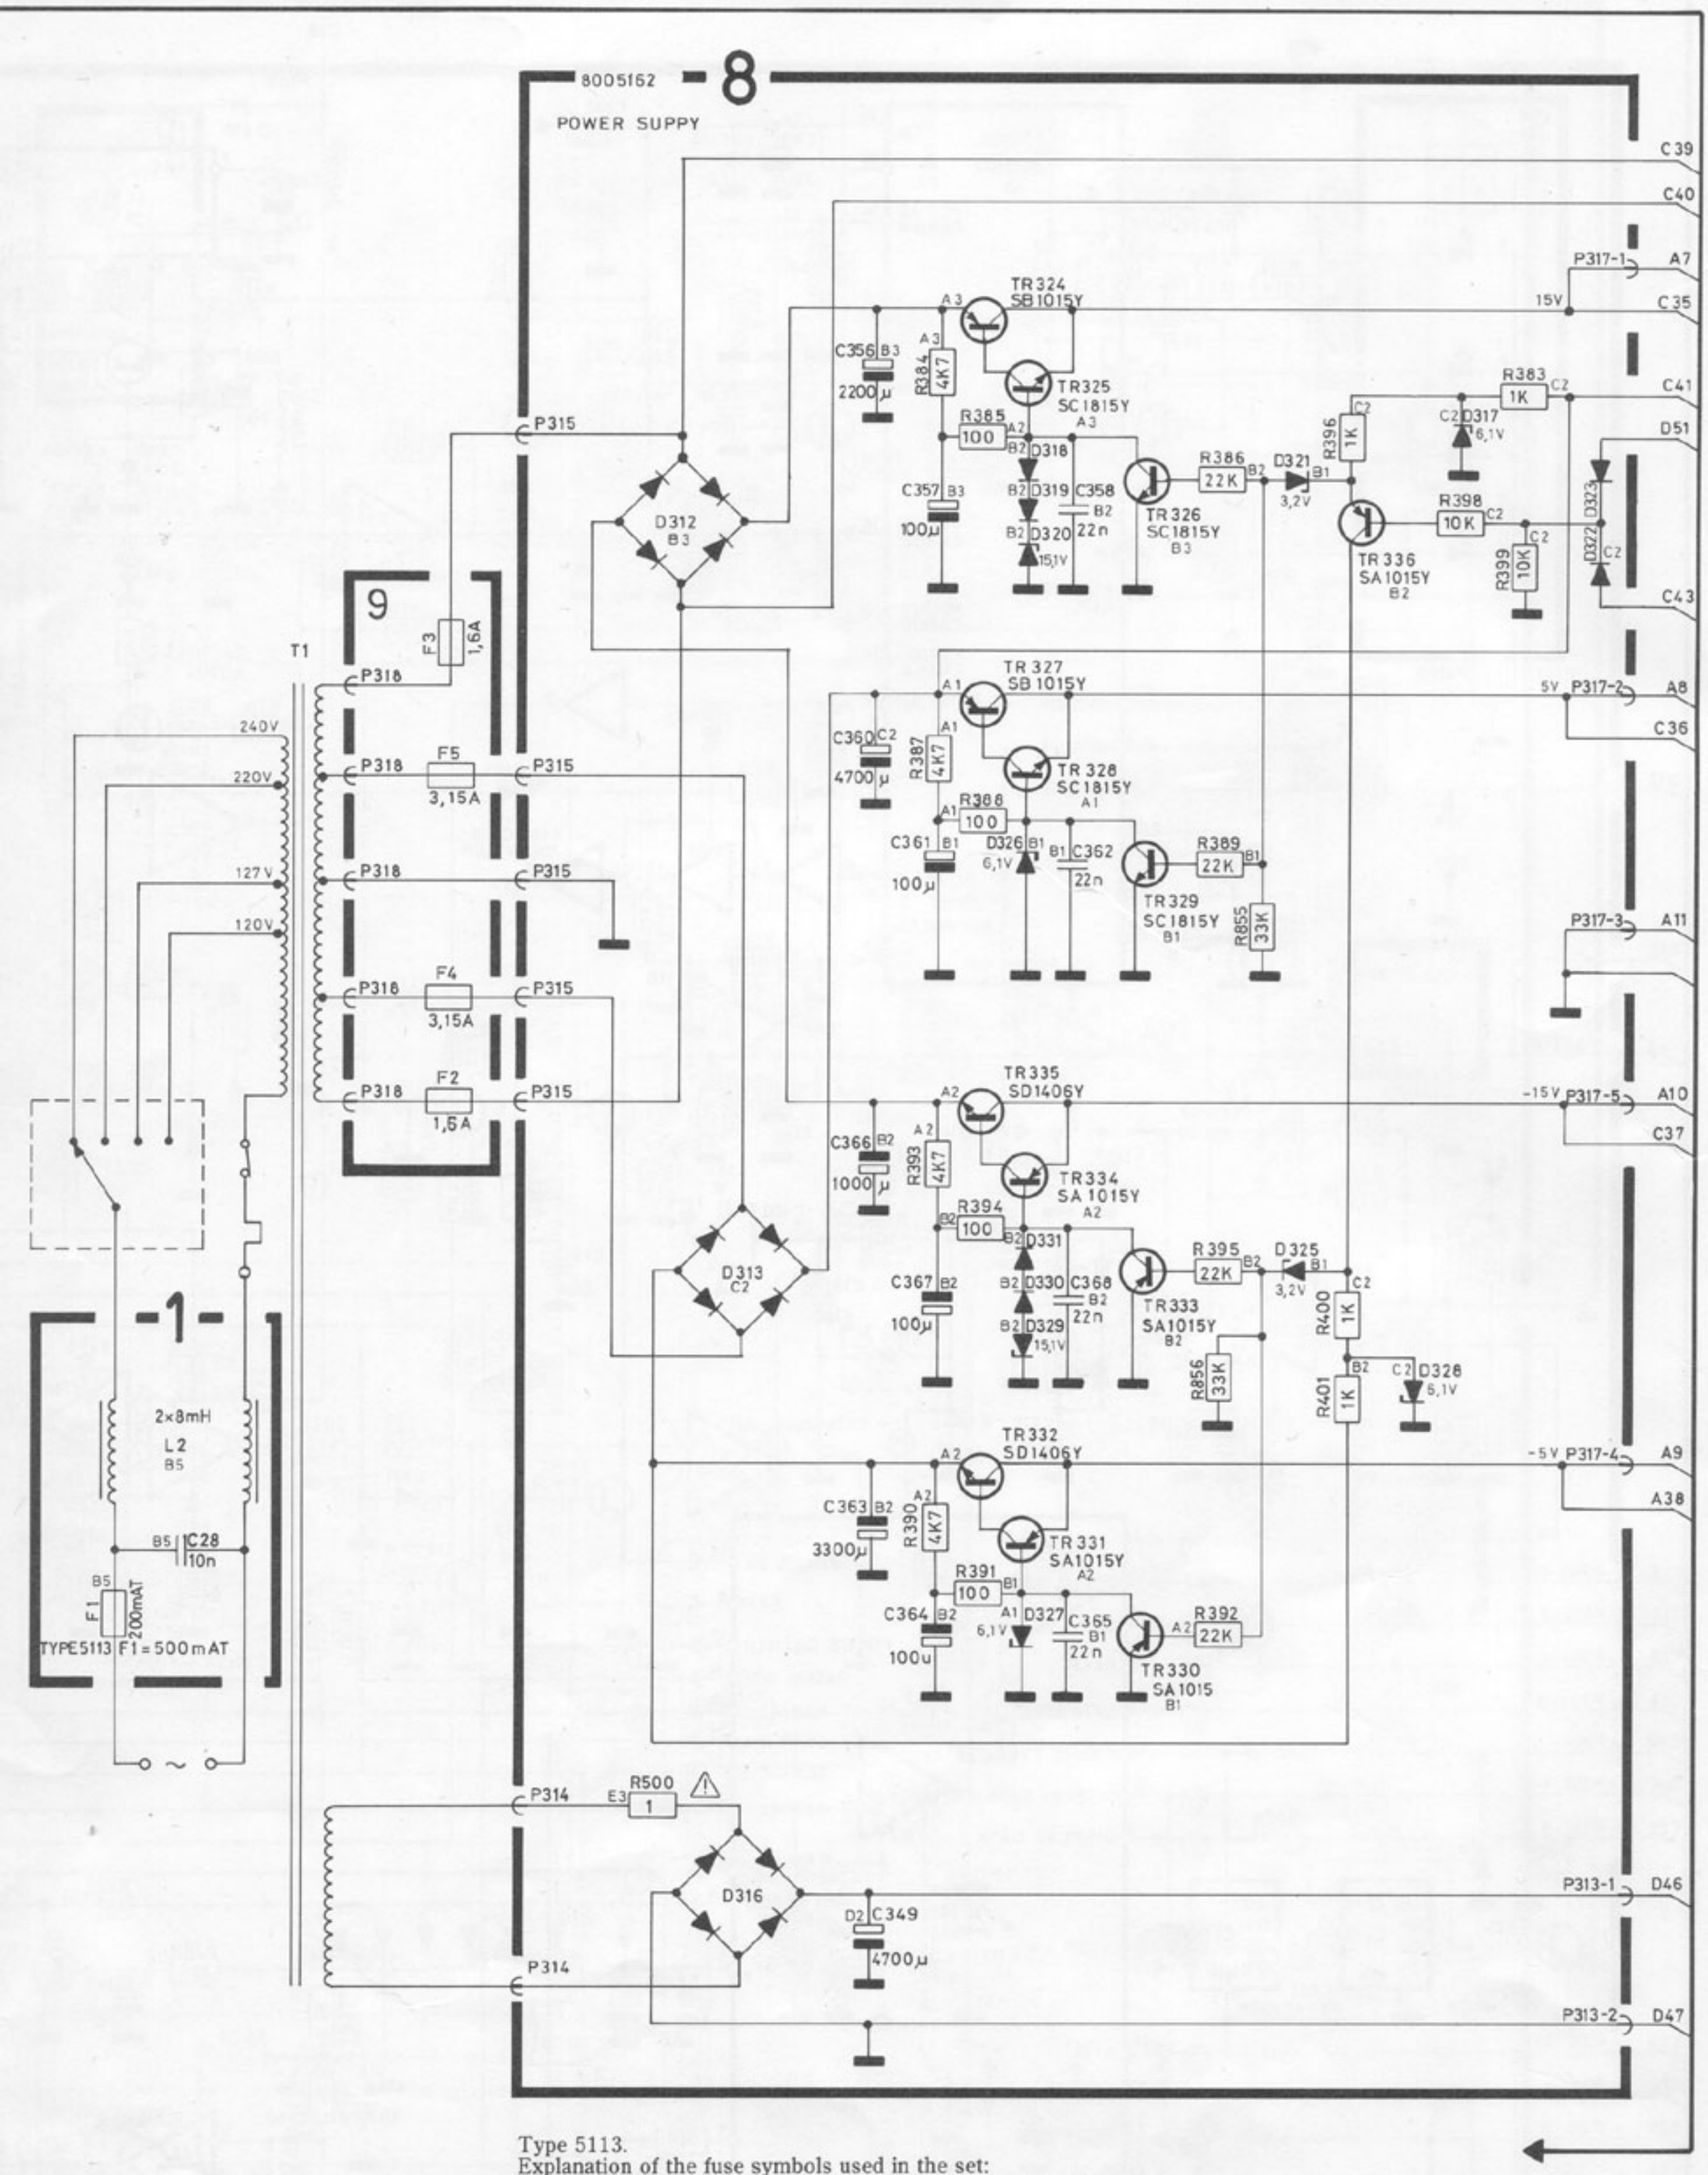

Type 5113.
Explanation of the fuse symbols used in the set:
Explanation de symboles du fusible utilisés dans l'appareil:

T 1.6 A 250V	Replace with same tyep 1.6 ampere 250 volts slow acting fuse. Remplacer par un fusible de meme type retardé et de 1,6 ampere 250 volts.
T 3.15 A 250V	Replace with same type 3.15 ampere 250 volts slow acting fuse. Remplacer par un fusible de meme type retardé et de 3,15 ampere 250 volts.
T500mA 250V	Replace with same type 500 milliamperes 250 volts slow acting fuse Remplacer par un fusible de meme type retardé et de 500 milliamperes 250 volts.

DIAGRAM C Decoder, System Control

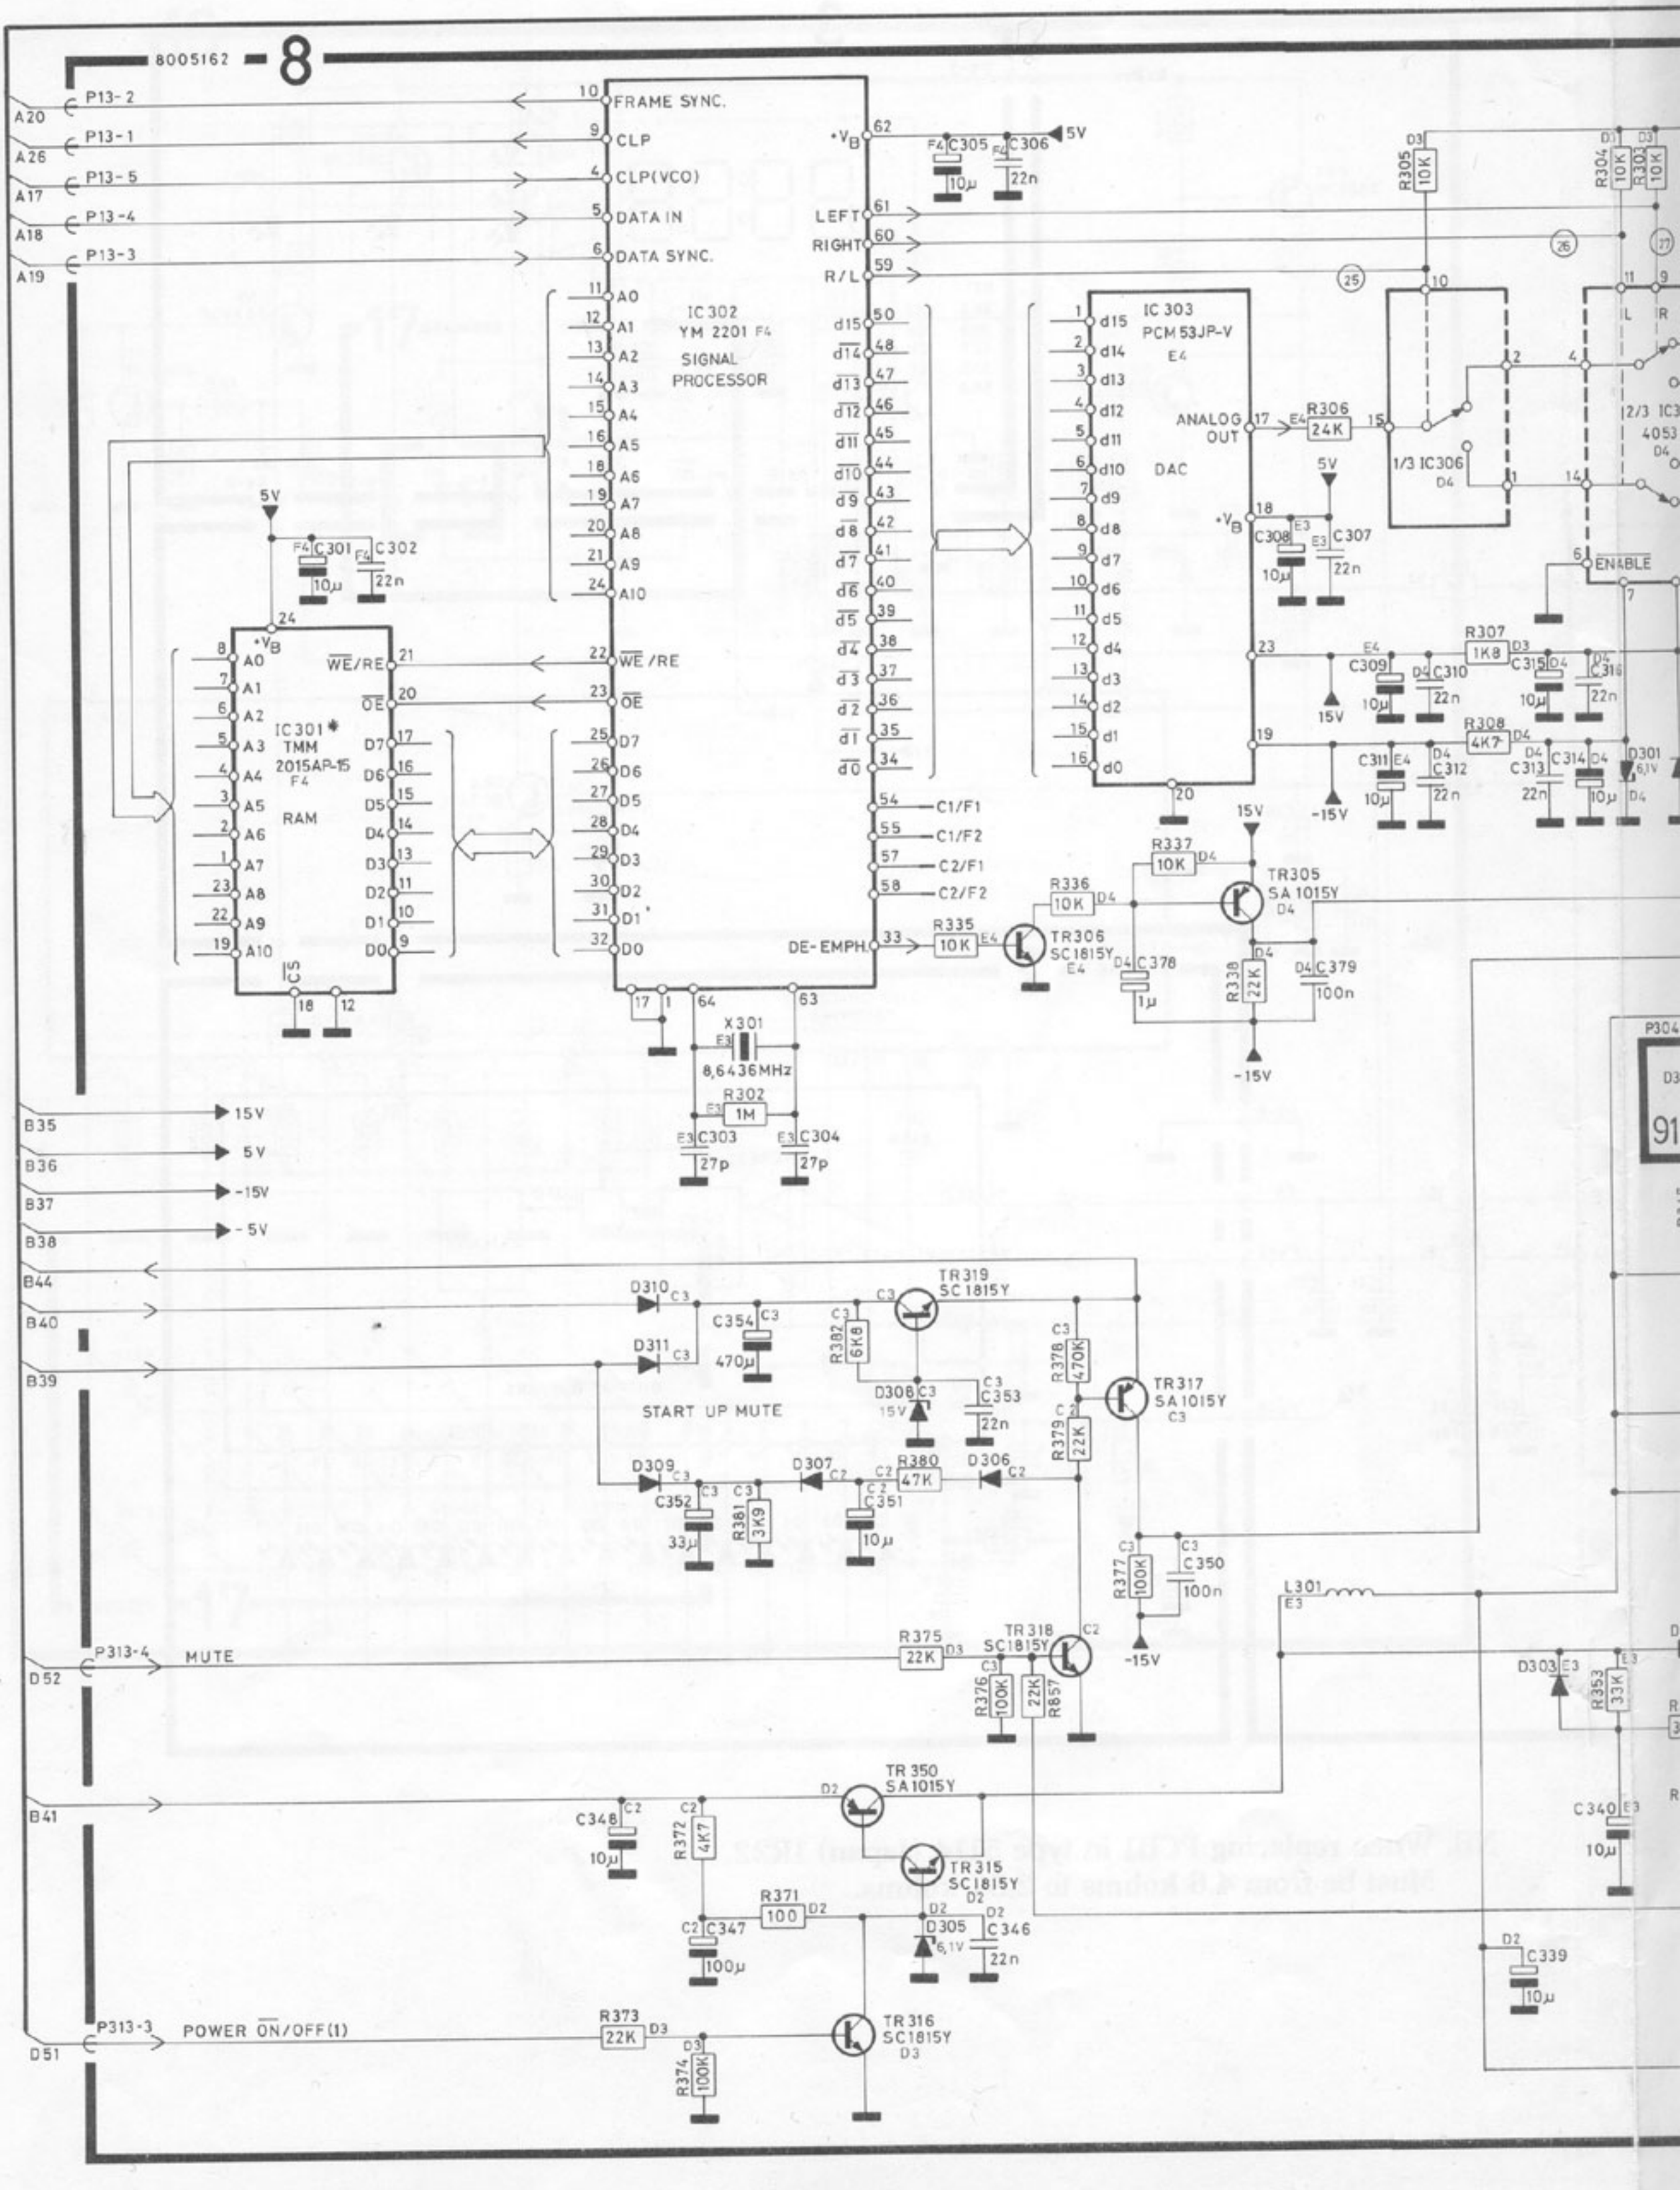

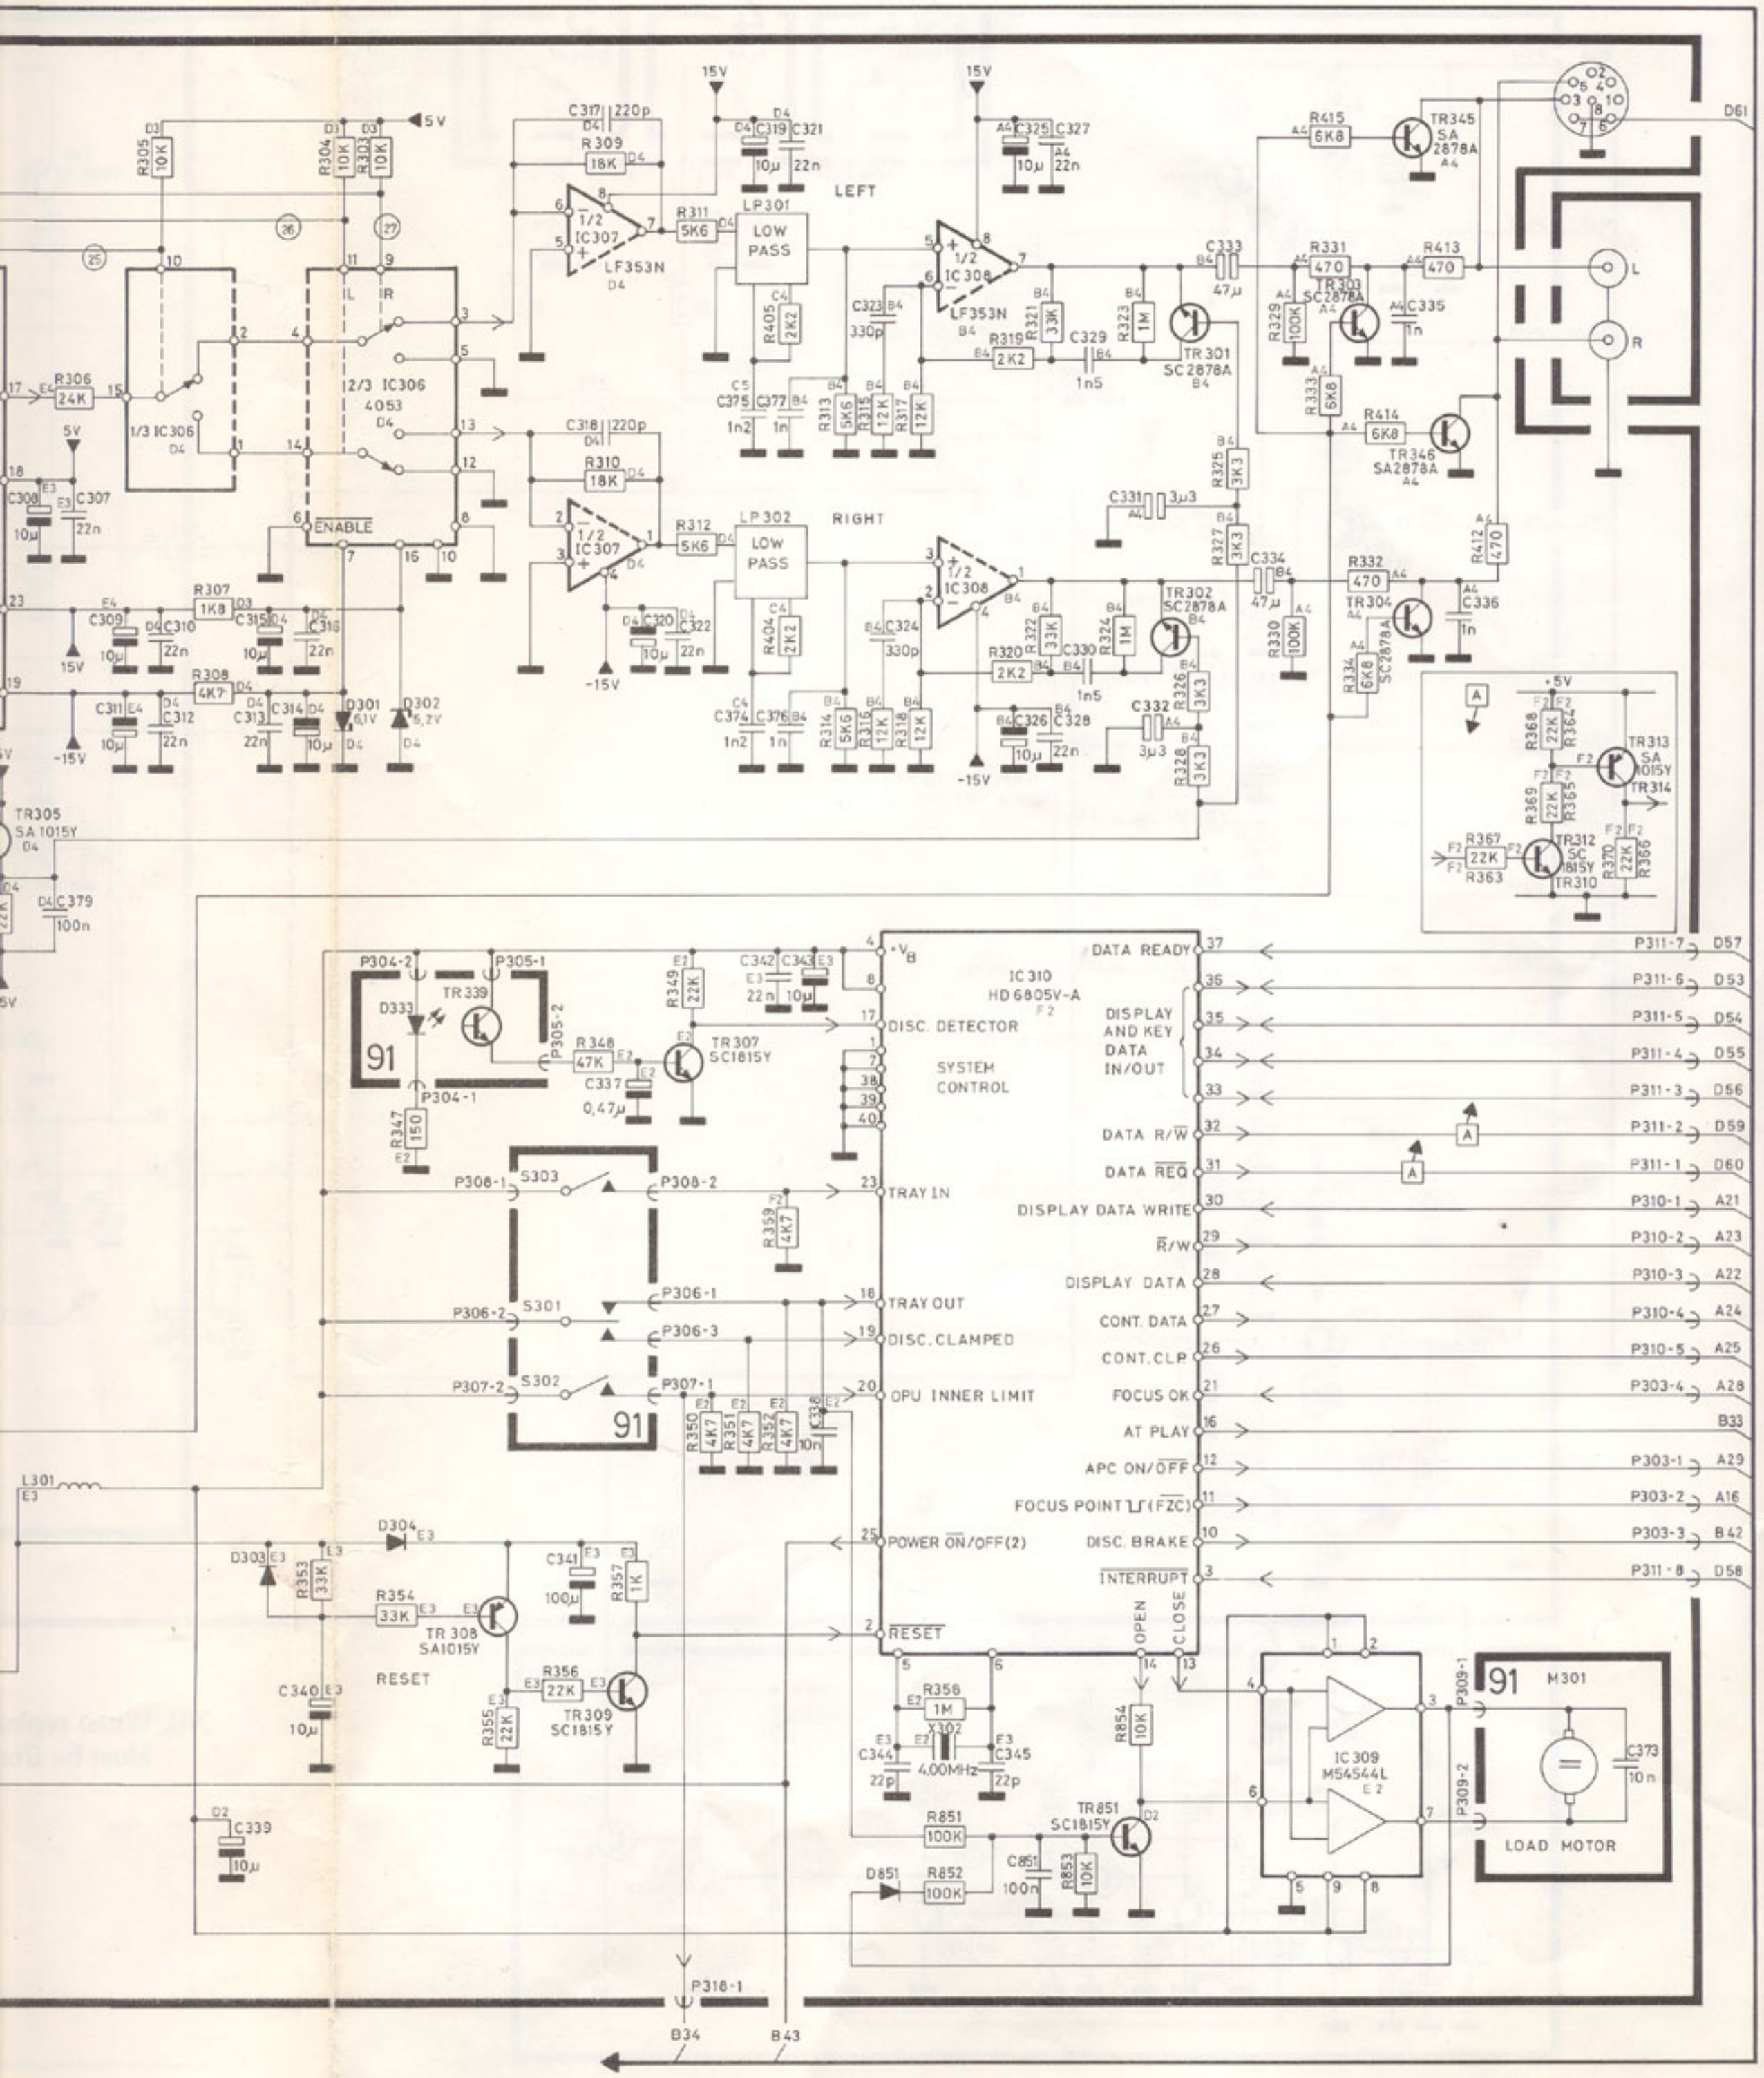
15V
5V
-15V
LEFT
RIGHT
LOW PASS
LP301
LP302
IC307 LF353N
IC308 LF353N
2/3 IC306 4053
1/3 IC306
ENABLE
R305 10K
R304 10K
R303 10K
R306 24K
R307 1K8
R308 4K7
R309 18K
R310 18K
R311 5K6
R312 5K6
C317 220p
C318 220p
C319 C321
C325 C327
C307 C308 C309 C310 C311 C312 C313 C314 C315 C316
C320 C322
C323 330p
C324 330p
C326 C328
C329 1n5
C330 1n5
C331 3µ3
C332 3µ3
C333 47µ
C334 47µ
C335 1n
C336 1n
C374 C375 C376 C377 1n2 1n
R404 2K2
R405 2K2
R313 5K6
R314 5K6
R315 12K
R316 12K
R317 12K
R318 12K
R319 2K2
R320 2K2
R321 33K
R322 33K
R323 1M
R324 1M
R325 3K3
R326 3K3
R327 3K3
R328 3K3
R329 100K
R330 100K
R331 470
R332 470
R333 6K8
R334 6K8
R412 470
R413 470
R414 6K8
R415 6K8
TR301 SC 2878A
TR302 SC2878A
TR303 SC2878A
TR304 SC2878A
TR345 SA 2878A
TR346 SA2878A
TR305 SA 1015Y
TR313 SA 1015Y
TR314
TR312 SC 1815Y
TR310
R363 22K
R365 22K
R366 22K
R367 22K
R368 22K
R369 22K
R370 22K
C379 100n
D301 6,1V
D302 6,2V
D61
L
R
A
+5V
IC 310 HD 6805V-A F2
SYSTEM CONTROL
DISC. DETECTOR
TRAY IN
TRAY OUT
DISC. CLAMPED
OPU INNER LIMIT
POWER ON/OFF(2)
RESET
DISPLAY AND KEY DATA IN/OUT
DATA READY
DATA R/W
DATA REQ
DISPLAY DATA WRITE
R/W
DISPLAY DATA
CONT. DATA
CONT. CLP
FOCUS OK
AT PLAY
APC ON/OFF
FOCUS POINT (FZC)
DISC. BRAKE
INTERRUPT
OPEN
CLOSE
P311-7 D57
P311-6 D53
P311-5 D54
P311-4 D55
P311-3 D56
P311-2 D59
P311-1 D60
P310-1 A21
P310-2 A23
P310-3 A22
P310-4 A24
P310-5 A25
P303-4 A28
B33
P303-1 A29
P303-2 A16
P303-3 B42
P311-8 D58
TR339
TR307 SC1815Y
TR308 SA1015Y
TR309 SC1815Y
TR851 SC1815Y
S303
S301
S302
91
R347 150
R348 47K
R349 22K
R350 4K7
R351 4K7
R352 4K7
R353 33K
R354 33K
R355 22K
R356 22K
R357 1K
R358 1M
R359 4K7
R851 100K
R852 100K
R853 10K
R854 10K
C337 0,47µ
C338 10n
C339 10µ
C340 10µ
C341 100µ
C342 C343 22n 10µ
C344 C345 22p 22p
C373 10n
C851 100n
D303
D304
D333
D851
X302 4.00MHz
IC 309 M54544L
M301
LOAD MOTOR
P304-2
P304-1
P305-1
P305-2
P306-1
P306-2
P306-3
P307-1
P307-2
P309-1
P309-2
P318-1
L301
B34
B43

DIAGRAM D Display and Key Control

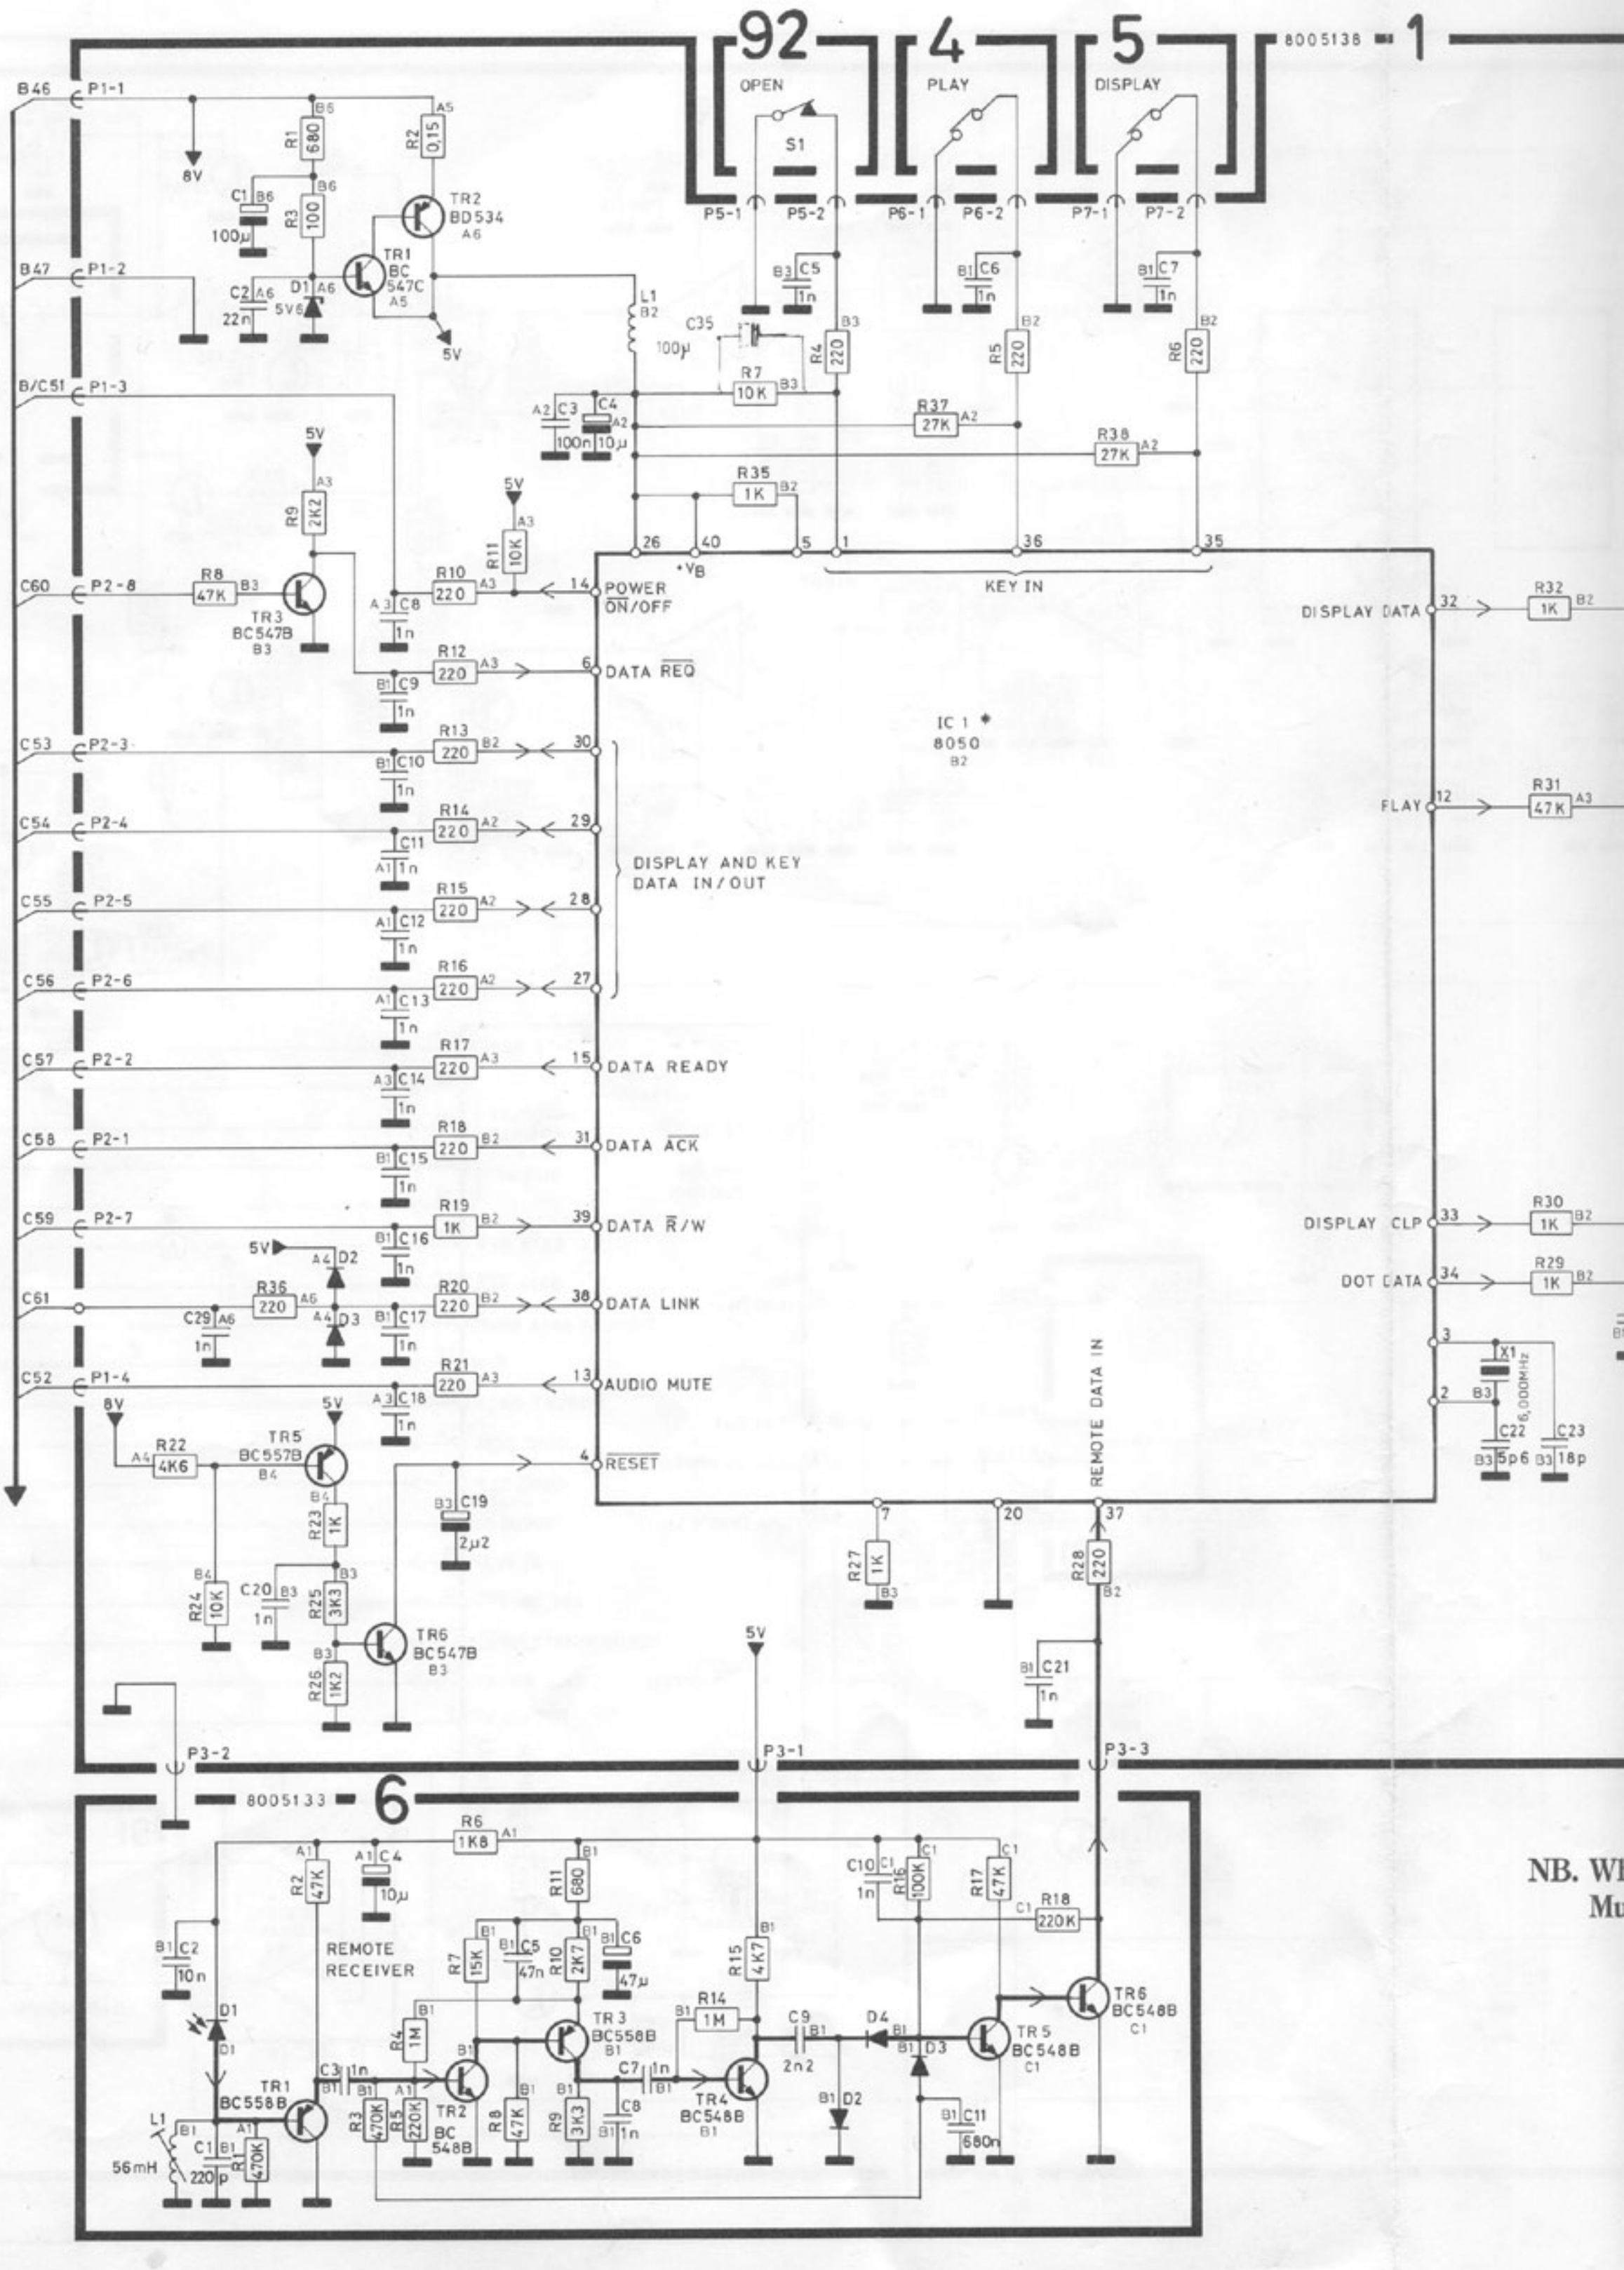

NB. WI
Mu

Bang&Olufsen

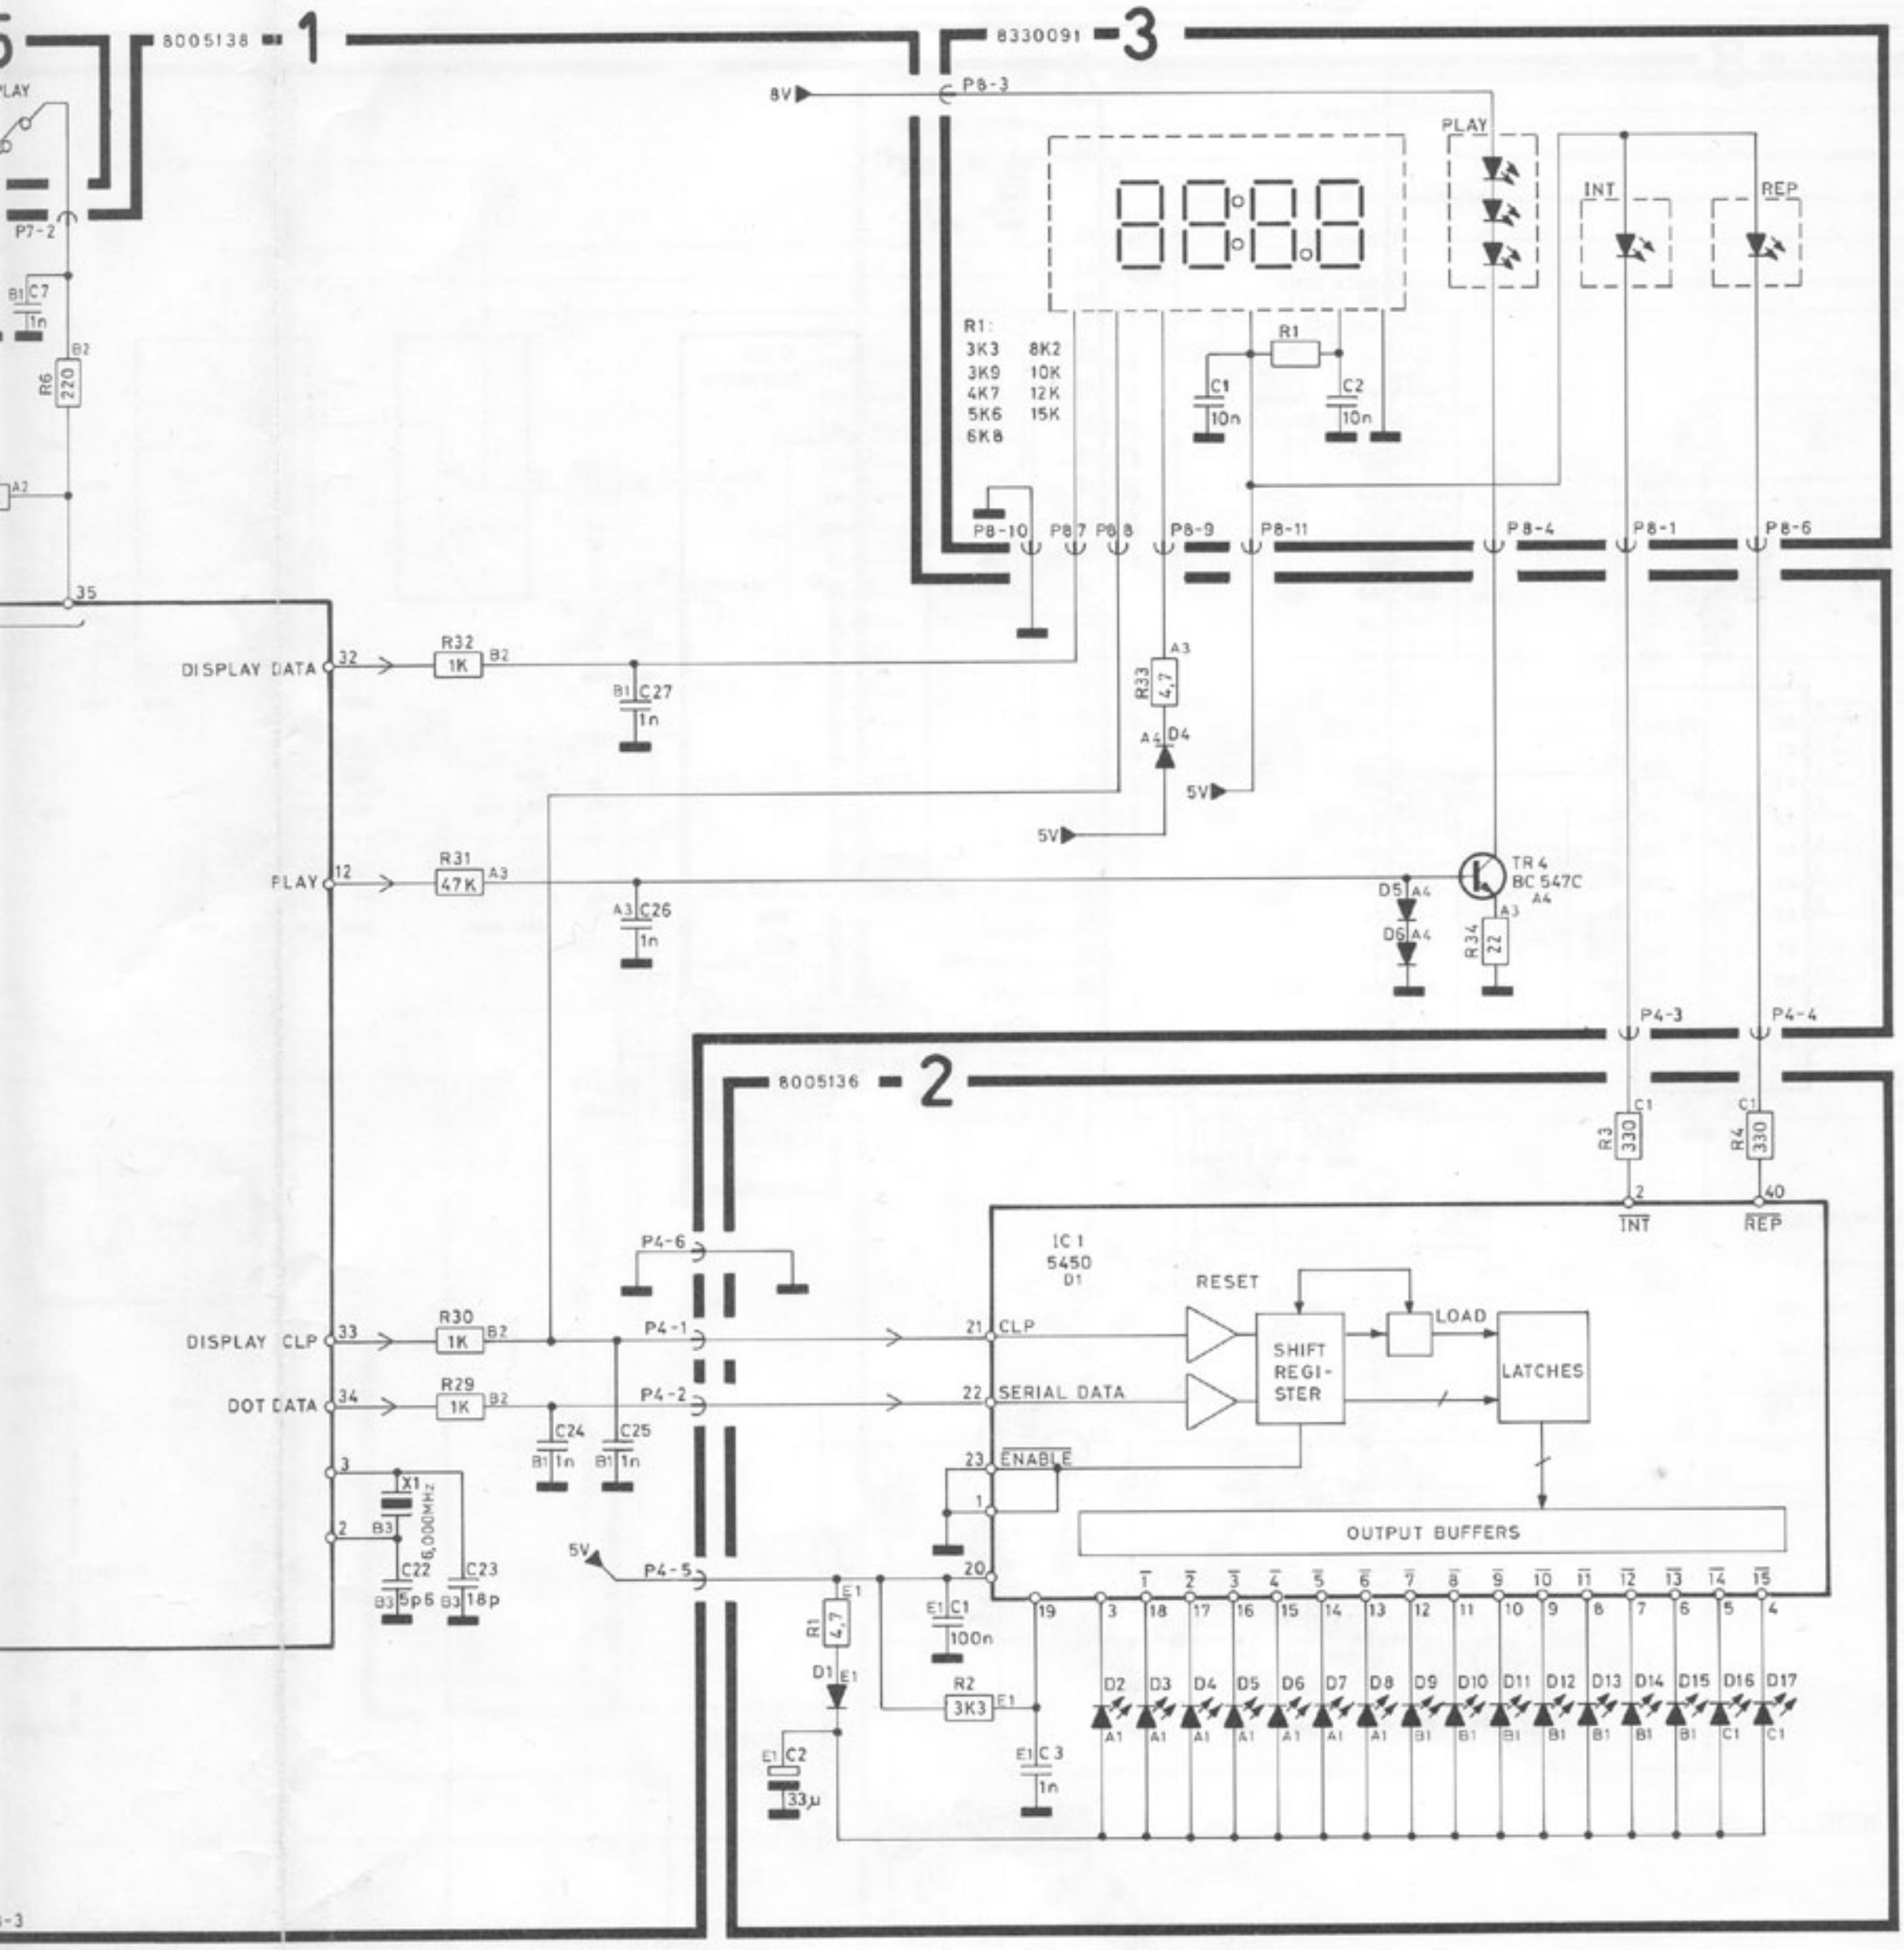

NB. When replacing PCB1 in type 5114 (Japan) 1R22.
Must be from 4.6 kohms to 2.55 kohms.

DIAGRAM E Remote transmitter, keyboard

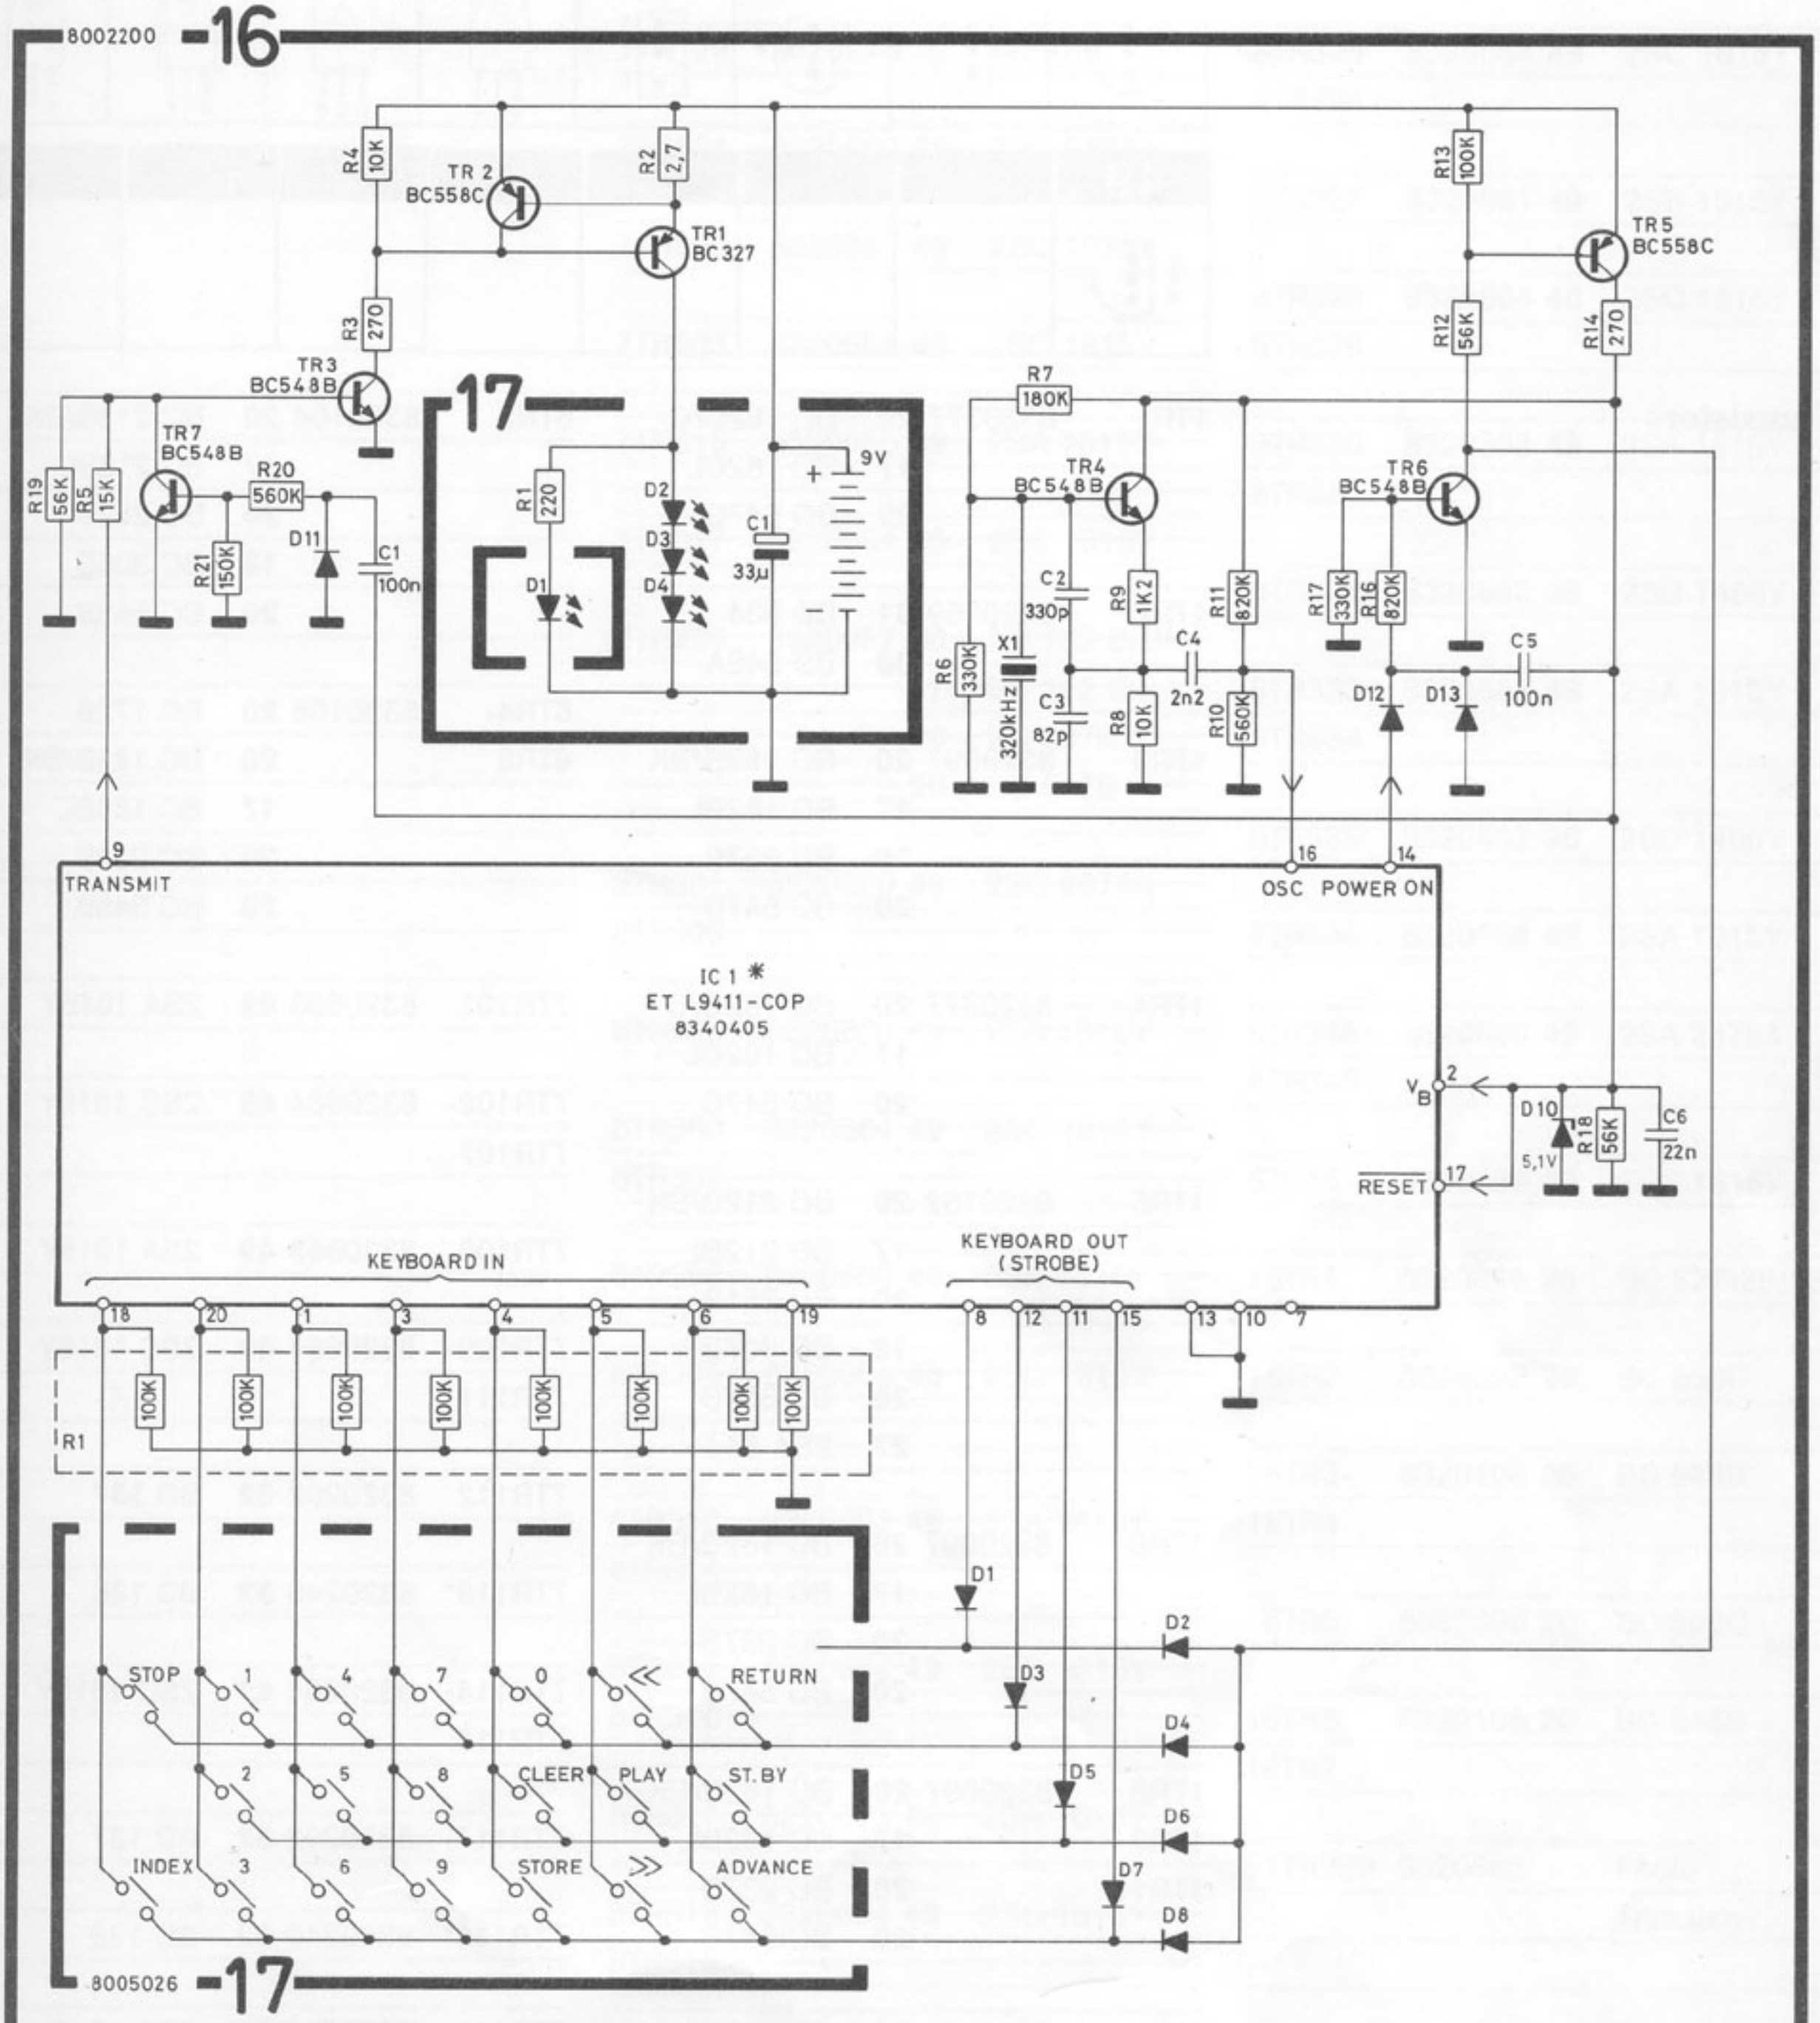

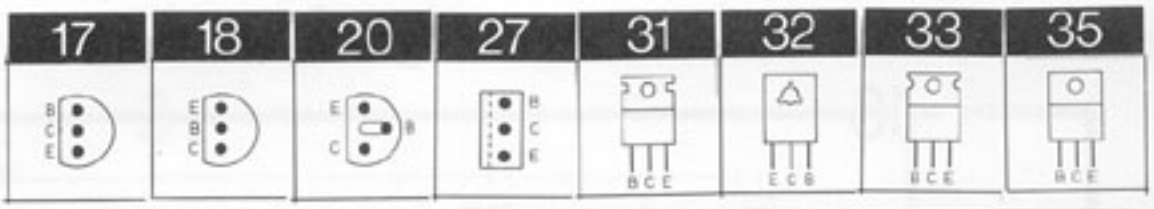

Transistors

1TR1	8320377	**20**	BC 182C/C
		17	BC 182CL
		20	BC 547C
1TR2*	8320369	**31**	BD 534
		33	BD 540A
1TR3	8320097	**20**	BC 182B/BK
		17	BC 182BL
		20	BC 237B
		20	BC 547B
1TR4	8320377	**20**	BC 182C/C
		17	BC 182CL
		20	BC 547C
1TR5	8320152	**20**	BC 212B/BK
		17	BC 212BL
		20	BC 251B
		18	BC 307B
		20	BC 557B
		27	2SA 844
1TR6	8320097	**20**	BC 182B/BK
		17	BC 182BL
		20	BC 237B
		20	BC 547B
1TR8	8320097	**20**	BC 182B/BK
1TR9		**17**	BC 182BL
1TR11		**20**	BC 237B
		20	BC 547B
6TR1	8320104	**20**	BC 213B/BK
		17	BC 213BL
		20	BC 252B
		18	BC 308B
		20	BC 558B
6TR2	8320108	**20**	BC 172B
		20	BC 183B/BK
		17	BC 183BL
		20	BC 238B
		20	BC 548B

6TR3	8320104	**20**	BC 213B/BK
		17	BC 213BL
		20	BC 252B
		18	BC 308B
		20	BC 558B
6TR4-	8320108	**20**	BC 172B
6TR6		**20**	BC 183B/BK
		17	BC 183BL
		20	BC 238B
		20	BC 548B
7TR101	8320663	**49**	2SA 1015Y
7TR102- 7TR107	8320664	**49**	2SC 1815Y
7TR108	8320663	**49**	2SA 1015Y
7TR109- 7TR111	8320664	**49**	2SC 1815Y
7TR112	8320292	**32**	BD 137
7TR113*	8320240	**32**	BD 136
7TR114- 7TR115	8320664	**49**	2SC 1815Y
7TR117	8320292	**32**	BD 137
7TR118*	8320240	**32**	BD 136
7TR119	8320664	**49**	2SC 1815Y
7TR120	8320292	**32**	BD 137
7TR121*	8320240	**32**	BD 136
7TR123	8320664	**49**	2SC 1815Y
7TR124	8320292	**32**	BD 137
7TR125*	8320240	**32**	BD 136
7TR126	8320292	**32**	BD 137
7TR127*	8320240	**32**	BD 136

7TR128	8320292	**32**	BD 137
7TR129*	8320240	**32**	BD 136
7TR801	8320660	**49**	2SC 2878A
7TR802	8320663	**49**	2SC 1015Y
7TR803	8320664	**49**	2SC 1815Y
7TR816	8320663	**49**	2SA 1015Y
7TR817	8320664	**49**	2SC 1815Y
7TR820	8320097	**20**	BC 182 B/BK
		17	BC 182 BL
		20	BC 237B
		20	BC 547B
8TR301-8TR303	8320660	**49**	2SC 2878A
8TR305	8320663	**49**	2SA 1015Y
8TR306	8320664	**49**	2SC 1815Y
8TR307			
8TR308	8320663	**49**	2SA 1015Y
8TR309-8TR312	8320664	**49**	2SC 1815Y
8TR313	8320663	**49**	2SA 1015Y
8TR314			
8TR315	8320664	**49**	2SC 1815Y
8TR316			
8TR317	8320663	**49**	2SA 1015Y
8TR318	8320664	**49**	2SC 1815Y
8TR319			
8TR324	8320661	**49**	2SB 1015Y
8TR325	8320664	**49**	2SC 1815Y
8TR326			
8TR327	8320661	**49**	2SB 1015Y
8TR328	8320664	**49**	2SC 1815Y
8TR329			
8TR330	8320663	**49**	2SA 1015Y
8TR331			
8TR332	8320662	**35**	2SD 1406Y
8TR333	8320663	**49**	2SA 1015Y
8TR334			
8TR335	8320662	**35**	2SD 1406Y
8TR336	8320663	**49**	2SA 1015Y
8TR345	8320660	**49**	2SA 2878A
8TR346			
8TR851	8320664	**49**	2SC 1815Y
16TR1	8320316	**20**	BC 327-25/1
16TR2	8320398	**20**	BC 558C
16TR3-16TR4	8320108	**20**	BC 548B
16TR5	8320398	**20**	BC 558C
16TR6	8320108	**20**	BC 548B
16TR7			
91TR339	8320665		Photo Transistor

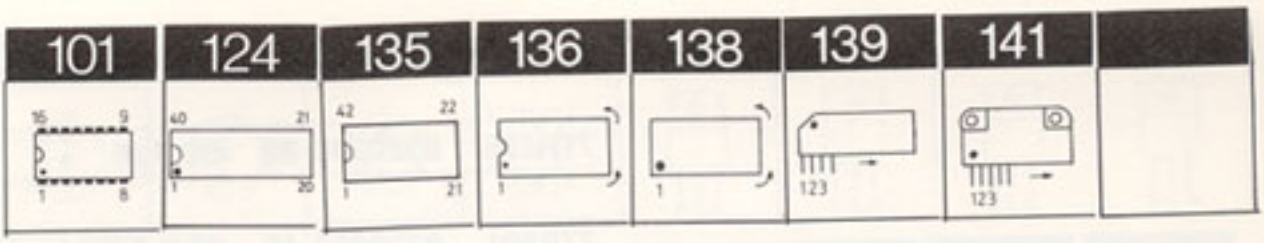

1IC1 △	8340691	**135**	8050	
1IC2 △	8340167	**136**	HEF 4001 BP	
2IC1 △	8340467	**124**	MM 5450N	
7IC101 △	8340846	**138**	CX-20109	
7IC102 △	8340839	**136**	TC40 H 368 P	
7IC103 △	8340849	**138**	IR 3 C01	
7IC104 △	8340850	**138**	YM3511	
7IC105	8340840	**138**	NJM 4558D	
7IC106-△	8340704	**139**	NJM 4558S	
7IC110				
7IC111 △	8340373	**136**	TC 4001BP	
7IC113-	8340704	**139**	NJM 4558S	
7IC115				
7IC801 △	8340491	**101**	HEF 4520BP	

7IC815	8340704	**139**	NJM 4558S
7IC816	8340373	**136**	TC 4001 BP
8IC301 △	8340851	**136**	TMM 2015AP-15
8IC302 △	8340852	**136**	YM 2201
8IC303 △	8340853	**136**	PCM 53JP-V
8IC306 △	8340340	**101**	CD 4053 BCN
		101	HEF 4053 BP
		101	MC 4053BP
8IC307 △	8340195	**103**	LF 353 N
8IC308		**103**	TDB 0353 DP
		103	TL 072 CP
		103	UAF 772 TC
8IC309 △	8340842	**141**	M-54544L
8IC310 △	8340854	**136**	HD 6805V-A

16IC1	8340405	**135**	ETL 9411

* Specially selected or adapted sample

△ Indicates static electricity may destroy the component

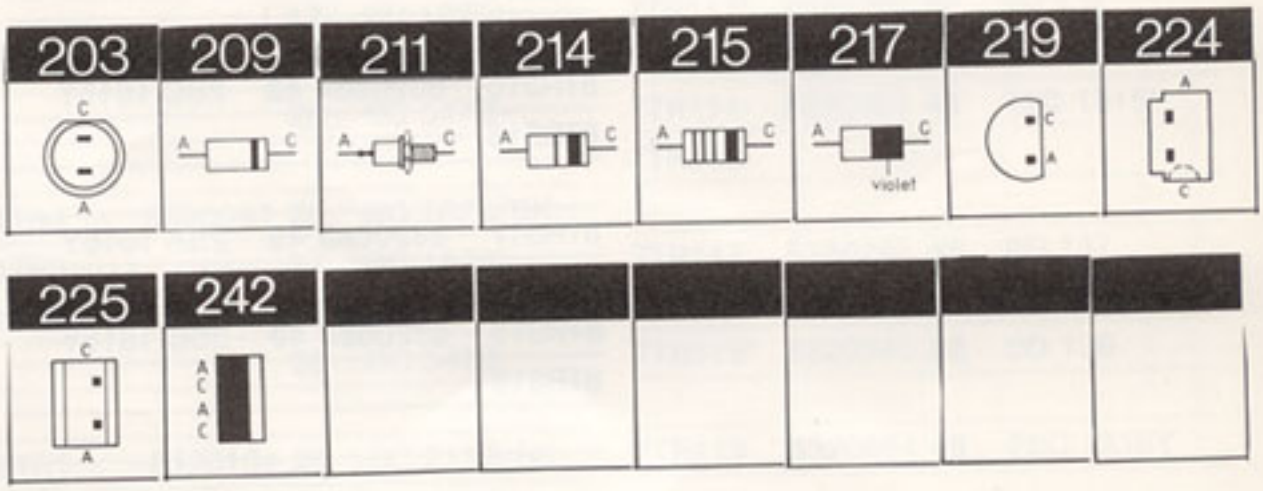

1D1	8300296	**209**	BZX79B 5V6
		209	BZX83B 5V6
		209	ZPD 5V6
1D2	8300058	**217**	SFD 184
1D3		**209**	1N 4148
		215	1N 4148
1D4	8300023	**209**	1N 4002
1D5	8300058	**217**	SFD 184
1D6		**209**	1N 4148
1D8		**215**	1N 4148

1D9	8300040	**211**	ZX12
2D1	8300023	**209**	1N 4002
2D3-	8330137		LED green
2D17			
6D1	8330004	**224**	BPW 41
		224	BPW 41D
		219	SFH 205
		225	TIL 100

6D2-	8300058	**217**	SFD 184
6D4		**209**	1N 4148
		215	1N 4148
7D101	8300516	**209**	HZ 12B2L
7D102	8300486	**214**	BAX 14
7D103	8300520	**242**	KV 1226X
7D104			
7D105	8300515	**209**	HZ 6 BIL
7D106			
7D107-	8300486	**214**	BAX 14
7D118			
7D815	8300486	**214**	BAX 14
7D816			
7D830	8300024	**209**	AA 119
8D301	8300514	**209**	HZ 5C2
8D302			
8D303	8300486	**214**	BAX 14
8D304			
8D305	8300515	**209**	HZ 6 BIL
8D306	8300486	**214**	BAX 14
8D307			
8D308	8300517	**209**	HZ 15-IL
8D309-	8300486	**214**	BAX 14
8D311			
8D312-	8300519	**241**	1B4B41
8D313			
8D316			
8D317	8300515	**209**	HZ 6 BIL
8D318	8300486	**214**	BAX 14
8D319			
8D320	8300517	**209**	HZ 15-IL
8D321	8300521	**209**	HZ 3C2
8D322	8300486	**214**	BAX 14
8D323			
8D325	8300521	**209**	HZ 3C2
8D326-	8300515	**209**	HZ 6 BIL
8D328			
8D329	8300517	**209**	HZ 15-IL
8D330	8300486	**214**	BAX 14
8D331			
8D851	8300486	**214**	BAX 14
16D1-8	8300058	**209**	1N4148
		215	1N4148
16D10	8300169	**209**	BZX 79 5.1V
		209	ZPD 5.1V
		209	BZX 83.5V
16D11-	8300058	**209**	1N4148
16D13		**215**	1N4148
17D2-	8330022	**203**	LD 271
17D4		**203**	V-290-P
91D333	8330166		LED

LIST OF ELECTRICAL PARTS

Resistors not mentioned are standard 5% 1/4 W carbon film

PCB 1 - 8005138
Display and Key Control
*5114 only**

R2	5020588	0.15 Ω 0.5W	R24	5020110	10 kΩ 1% 1/4W
R22	5020093	4.64 kΩ 1% 1/4W	R33	5020501	4.7 Ω 5% 1W
R22*	5020202	2.55 kΩ			

C1	4200403	100 µF 25V	C17	4010035	1 nF 10% 63V
C2	4010076	22 nF -20+100% 40V	C18	4010035	1 nF 10% 63V
C3	4130179	100 nF 20% 63V	C19	4200423	2.2 µF 50V
C4	4200431	10 µF 16V	C20	4010027	1 nF 10% 63V
C5	4010035	1 nF 10% 63V	C21	4010035	1 nF 10% 63V
C6	4010035	1 nF 10% 63V	C22	4000016	5.6 pF ± 0.25 pF 63V
C7	4010035	1 nF 10% 63V	C23	4000081	18 pF 5% 63V
C8	4010035	1 nF 10% 63V	C24	4010035	1 nF 10% 63V
C9	4010035	1 nF 10% 63V	C25	4010035	1 nF 10% 63V
C10	4010035	1 nF 10% 63V	C26	4010035	1 nF 10% 63V
C11	4010035	1 nF 10% 63V	C27	4010035	1 nF 10% 63V
C12	4010035	1 nF 10% 63V	C28	4130351	10 nF 20% 250V
C13	4010035	1 nF 10% 63V	C29	4010027	1 nF 10% 63V
C14	4010035	1 nF 10% 63V	C31	4130226	220 nF 10% 63V
C15	4010035	1 nF 10% 63V	C32	4010033	820 pF 10% 63V
C16	4010035	1 nF 10% 63V	C35	4200330	100 µF -10+50 10V

X1	8090009	6.000 MHz ± 50 ppM	3358206	Heatsink
			3304103	Screen
F1	6600037	200 MAT 250V IEC 127		
	6600033	500 MAT 250V UL		
L1	8020342	Coil 10 uH		
L2	8022000	Coil 2 x 0.8 MHz		

PCB 2 - 8005136 Display Dots

R1	5020501	4.7 Ω 5% 1W	C1	4130179	100 nF 20% 63V
			C2	4200220	33 µF 63V
			C3	4010027	1 nF 10% 63V

PCB 3 - 8330091 Display Digits

C1	4010041	10 nF -20+80% 40V	C2	4010041	10 nF -20+80% 40V

PCB 6 - 8005133 Remote Control Reciver

C1	4000018	220 pF 5% 63V	C7	4010027	1 nF 10% 63V
C2	4010106	10 nF -20+80% 40V	C8	4010027	1 nF 10% 63V
C3	4010027	1 nF 10% 63V	C9	4010061	2.2 nF 10% 63V
C4	4200364	10 µF 63V	C10	4010027	1 nF 10% 63V
C5	4130223	47 nF 10% 63V	C11	4130319	680 nF 20% 100V
C6	4200364	47 µF -10+50% 10V			

L1	8022128	56 mH	3170230	Insulation piece
			3302400	Screen, upper
			3302392	Screen, lower

PCB 7 - 8005161 Servo

R401	5370318	22 kΩ 20%	R405	5370317	1 kΩ 20%
R402	5370318	22 kΩ 20%	R406	5370316	10 kΩ 20%
R403	5370319	220 kΩ 20%	R407	5370317	1 kΩ 20%
R404	5370317	1 kΩ 20%	R408	5370316	10 kΩ 20%

C101	4200431	10 µF 16V	C118	4130220	10 nF 5% 63V
C102	4200486	4.7 µF 50V	C119	4200220	33 µF 16V
C103	4130220	10 nF 5% 63V	C120	4010113	22 nF 30% 25V
C104	4200431	10 µF 16V	C121	4010024	470 pF 10% 63V
C105	4200544	22 µF 16V	C122	4130261	100 nF 5% 63V
C106	4200544	22 µF 16V	C123	4200431	10 µF 16V
C107	4200431	10 nF 5% 63V	C124	4200431	10 µF 16V
C108	4000025	15 pF 5% 63V	C125	4010113	22 nF 30% 25V
C109	4000025	15 pF 5% 63V	C126	4010113	22 nF 30% 25V
C110	4200220	33 µF 16V	C127	4130336	2.2 nF 5%
C111	4010113	22 nF 30% 25V	C128	4130336	2.2 nF 5%
C112	4000077	47 pF 2% 63V	C129	4000214	22 pF 5% 63V
C113	4130370	4.7 nF 5%	C130	4010066	220 pF 5% 63V
C114	4130370	4.7 nF 5%	C131	4000214	22 pF 5% 63V
C115	4000077	47 pF 2% 63V	C132	4200431	10 µF 16V
C116	4130328	33 nF 5% 63V	C133	4010113	22 nF 30% 25V
C117	4200476	0.47 µF 50V	C134	4000194	56 pF 5% 63V

C135	4000194	56 pF 5% 63V	C172	4200431	10 µF 16V
C136	4010062	330 pF 10% 63V	C173	4010060	22 nF -20+80% 40V
C137	4010062	330 pF 10% 63V	C174	4010060	22 nF -20+80% 40V
C138	4200431	10 µF 16V	C175	4130337	1 nF 5%
C139	4130219	47 nF 5% 63V	C176	4130337	1 nF 5%
C140	4000176	100 pF 5% 63V	C177	4130337	1 nF 5%
C141	4130371	8.2 nF 5%	C178	4010060	22 nF -20+80% 40V
C142	4000077	47 pF 2% 63V	C179	4010060	22 nF -20+80% 40V
C143	4010060	22 nF -20+80% 40V	C180	4010060	22 nF -20+80% 40V
C144	4000025	15 pF 5% 63V	C181	4200431	10 µF 16V
C145	4000025	15 pF 5% 63V	C182	4010113	22 nF 30% 25V
C146	4130343	1 µF 5%	C183	4200431	10 µF 16V
C147	4130340	39 nF 5% 63V	C184	4010113	22 nF 30% 25V
C148	4000214	22 pF 5% 63V	C185	4200431	10 µF 16V
C149	4200431	10 µF 16V	C186	4010060	22 nF -20+80% 40V
C150	4200431	10 µF 16V	C187	4200431	10 µF 16V
C151	4130339	3.3 nF 5%	C188	4010060	22 nF -10+80% 40V
C152	4200431	10 µF 16V	C189	4200431	10 µF 16V
C153	4200431	10 µF 16V	C190	4210060	22 nF -10+80% 40V
C154	4010060	22 nF -20+80% 40V	C191	4200431	10 µF 16V
C155	4010060	22 nF -20+80% 40V	C192	4210060	22 nF -20+80% 40V
C156	4000077	47 pF 2% 63V	C193	4130340	220 nF 5%
C157	4010060	22 nF -20+80 40V	C194	4130337	1 nF 5%
C158	4130339	3.3 nF 5%	C195	4130337	1 nF 5%
C159	4130339	3.3 nF 5%	C196	4130220	10 nF 5% 63V
C160	4130336	2.2 nF 5%	C801	4200483	47 µF 16V
C161	4130220	10 nF 5% 63V	C815	4200353	22 µF 50V
C162	4130220	10 nF 5% 63V	C816	4130342	330 nF 5%
C166	4010060	22 nF -20+80% 40V	C817	4000081	18 pF 5% 63V
C167	4130328	33 nF 5% 63V	C818	4200431	10 µF 16V
C168	4130328	33 nF 5% 63V	C819	4200423	2.2 µF 50V
C169	4130339	3.3 nF 5%	C820	4200475	0.22 µF 50V
C170	4130339	3.3 nF 5%	C824	4200426	1 µF 50V
C171	4200431	10 µF 16V			

L101	8020580	Coil 2.2 uH	L103	8020580	Coil 2.2 uH
L102	8020580	Coil 2.2 uH			

PCB 8 - 8005162 Decoder

R500	5020802	1 Ω 1/2W

C301	4200431	10 µF 16V	C336	4010027	1 nF 10% 63V
C302	4010113	22 nF 30% 25V	C337	4200476	0.47 µF 50V
C303	4000102	27 pF 5% 63V	C338	4130220	10 nF 50% 63V
C304	4000102	27 pF 5% 63V	C339	4200431	10 µF 16V
C305	4200431	10 µF 16V	C340	4200431	10 µF 16V
C306	4010113	22 nF 30% 25V	C341	4200478	100 µF 10V
C307	4010113	22 nF 30% 25V	C342	4010113	22 nF 30% 25V
C308	4200431	10 µF 16V	C343	4200478	100 µF 10V
C309	4200431	10 µF 16V	C344	4000183	22 pF 5% 63V
C310	4010113	22 nF 30% 25V	C345	4000183	22 pF 5% 63V
C311	4200431	10 µF 16V	C346	4010060	22 nF -20+80% 40V
C312	4010113	22 nF 30% 25V	C347	4200403	100 µF 25V
C313	4010113	22 nF 30% 25V	C348	4200431	10 µF 16V
C314	4200431	10 µF 16V	C349	4200668	4700 µF 25V
C315	4200431	10 µF 16V	C350	4130261	100 nF 5% 63V
C316	4010113	22 nF 30% 25V	C351	4200431	10 µF 16V
C317	4010021	220 pF 10% 63V	C352	4200489	33 µF 25V
C318	4010021	220 pF 10% 36V	C353	4010060	22 nF -20+80% 40V
C319	4200431	10 µF 16V	C354	4200611	470 µF 25V
C320	4200431	10 µF 16V	C356	4200669	2200 µF 50V
C321	4010113	22 nF 30% 25V	C357	4200403	100 µF 25V
C322	4010113	22 nF 30% 25V	C358	4010060	22 nF -20+80% 40V
C323	4100040	330 pF 2.5% 630V	C360	4200668	4700 µF 25V
C324	4100040	330 pF 2.5% 630V	C361	4200403	100 µF 25V
C325	4200431	10 µF 16V	C362	4010060	22 nF -20+80% 40V
C326	4200431	10 µF 16V	C363	4200670	3300 µF 16V
C327	4010113	22 nF 30% 25V	C364	4200403	100 µF 25V
C328	4010113	22 nF 30% 25V	C365	4010060	22 nF -20+80% 40V
C329	4000317	1.5 nF 2%	C366	4200671	1000 µF 35V
C330	4000317	1.5 nF 2%	C367	4200403	100 µF 25V
C331	4200485	3.3 µF 50V	C368	4010060	22 nF -20+80% 40V
C332	4200485	3.3 µF 50V	C373	4130220	10 nF 5% 63V
C333	4200483	47 µF 16V	C374	4000328	1.2 nF 2%
C334	4200483	47 µF 16V	C375	4000328	1.2 nF 2%
C335	4010027	1 nF 10% 63V	C376	4000329	1 nF 2%

3-2

C377	4000329	1 nF 2%	C379	4230261	100 nF 5% 63V
C378	4200426	1 µF 50V	C851	4130261	100 nF 5% 63V
X301	8030095	9.6436 MHz	LP301	8020604	Low Pass Filter
X302	8030000	Ceramic resonator 4 MHz	LP302	8020604	Low Pass Filter
L301	8020581	2.2 µH			

PCB 9 - 8005181 Fuse

F2	6600022	1.6A			
F3	6600022	1.6A			
F4	6600021	3.15A			
F5	6600021	3.15A			

PCB 16 - 8005179
Remote Keyboard

R1	5030017	8 x 100 kΩ 5% 1/8W	R2	5020625	2.7 Ω 5% 1/3W
C1	4130224	0.1 µF 63V	C4	4010061	22 nF 10% 63V
C2	4010062	330 pF 10% 63V	C5	4130224	0.1 µF 10% 63V
C3	4000200	82 pF 5% 63V	C6	4130193	22 nF 20% 63V
X1	8030039	320 kHz ± 1 kHz			

PCB 17 -8005026 Keyboard

C1	4200414	33 µF -10+50% 16V			
91C196	4010041	10 nF -10+80% 40V			
92T1	8013355	Transformer			
92S1	7402032	Switch			
91S301	7400322	Switch	91M101	2755027	Carrier Motor
91S302	7400331	Switch	91M102	8400147	Disc. Driver Motor
91S303	7400322	Switch	91M301	8400146	Load Motor

	x1	x10	x100	x1k	x10k	x100k	x1M
1.0			5011052	5010816	5011160	5011169	5011174
1.2			5011084	5011153	5011161	5011341	5011175
1.5			5011085	5011154	5011162	5011170	5011176
1.8			5011086		5011344		
2.2	5011032	5011035	5010886	5011155	5011163	5011171	5011342
2.4					5020422		
2.7				5020412	5020423	5020433	
3.3		5011346	5011087	5011156	5011164	5011172	5011177
3.9				5011157		5011173	
4.7	5011038		5011112	5011158	5011165	5011349	
5.6			5011127	5010885	5011166	5011340	
6.8			5011145	5010839	5011167		
8.2			5011152	5011159	5011168		

Standard resistors 5% 1/8W

4-1 4-1

LIST OF MECHANICAL PART

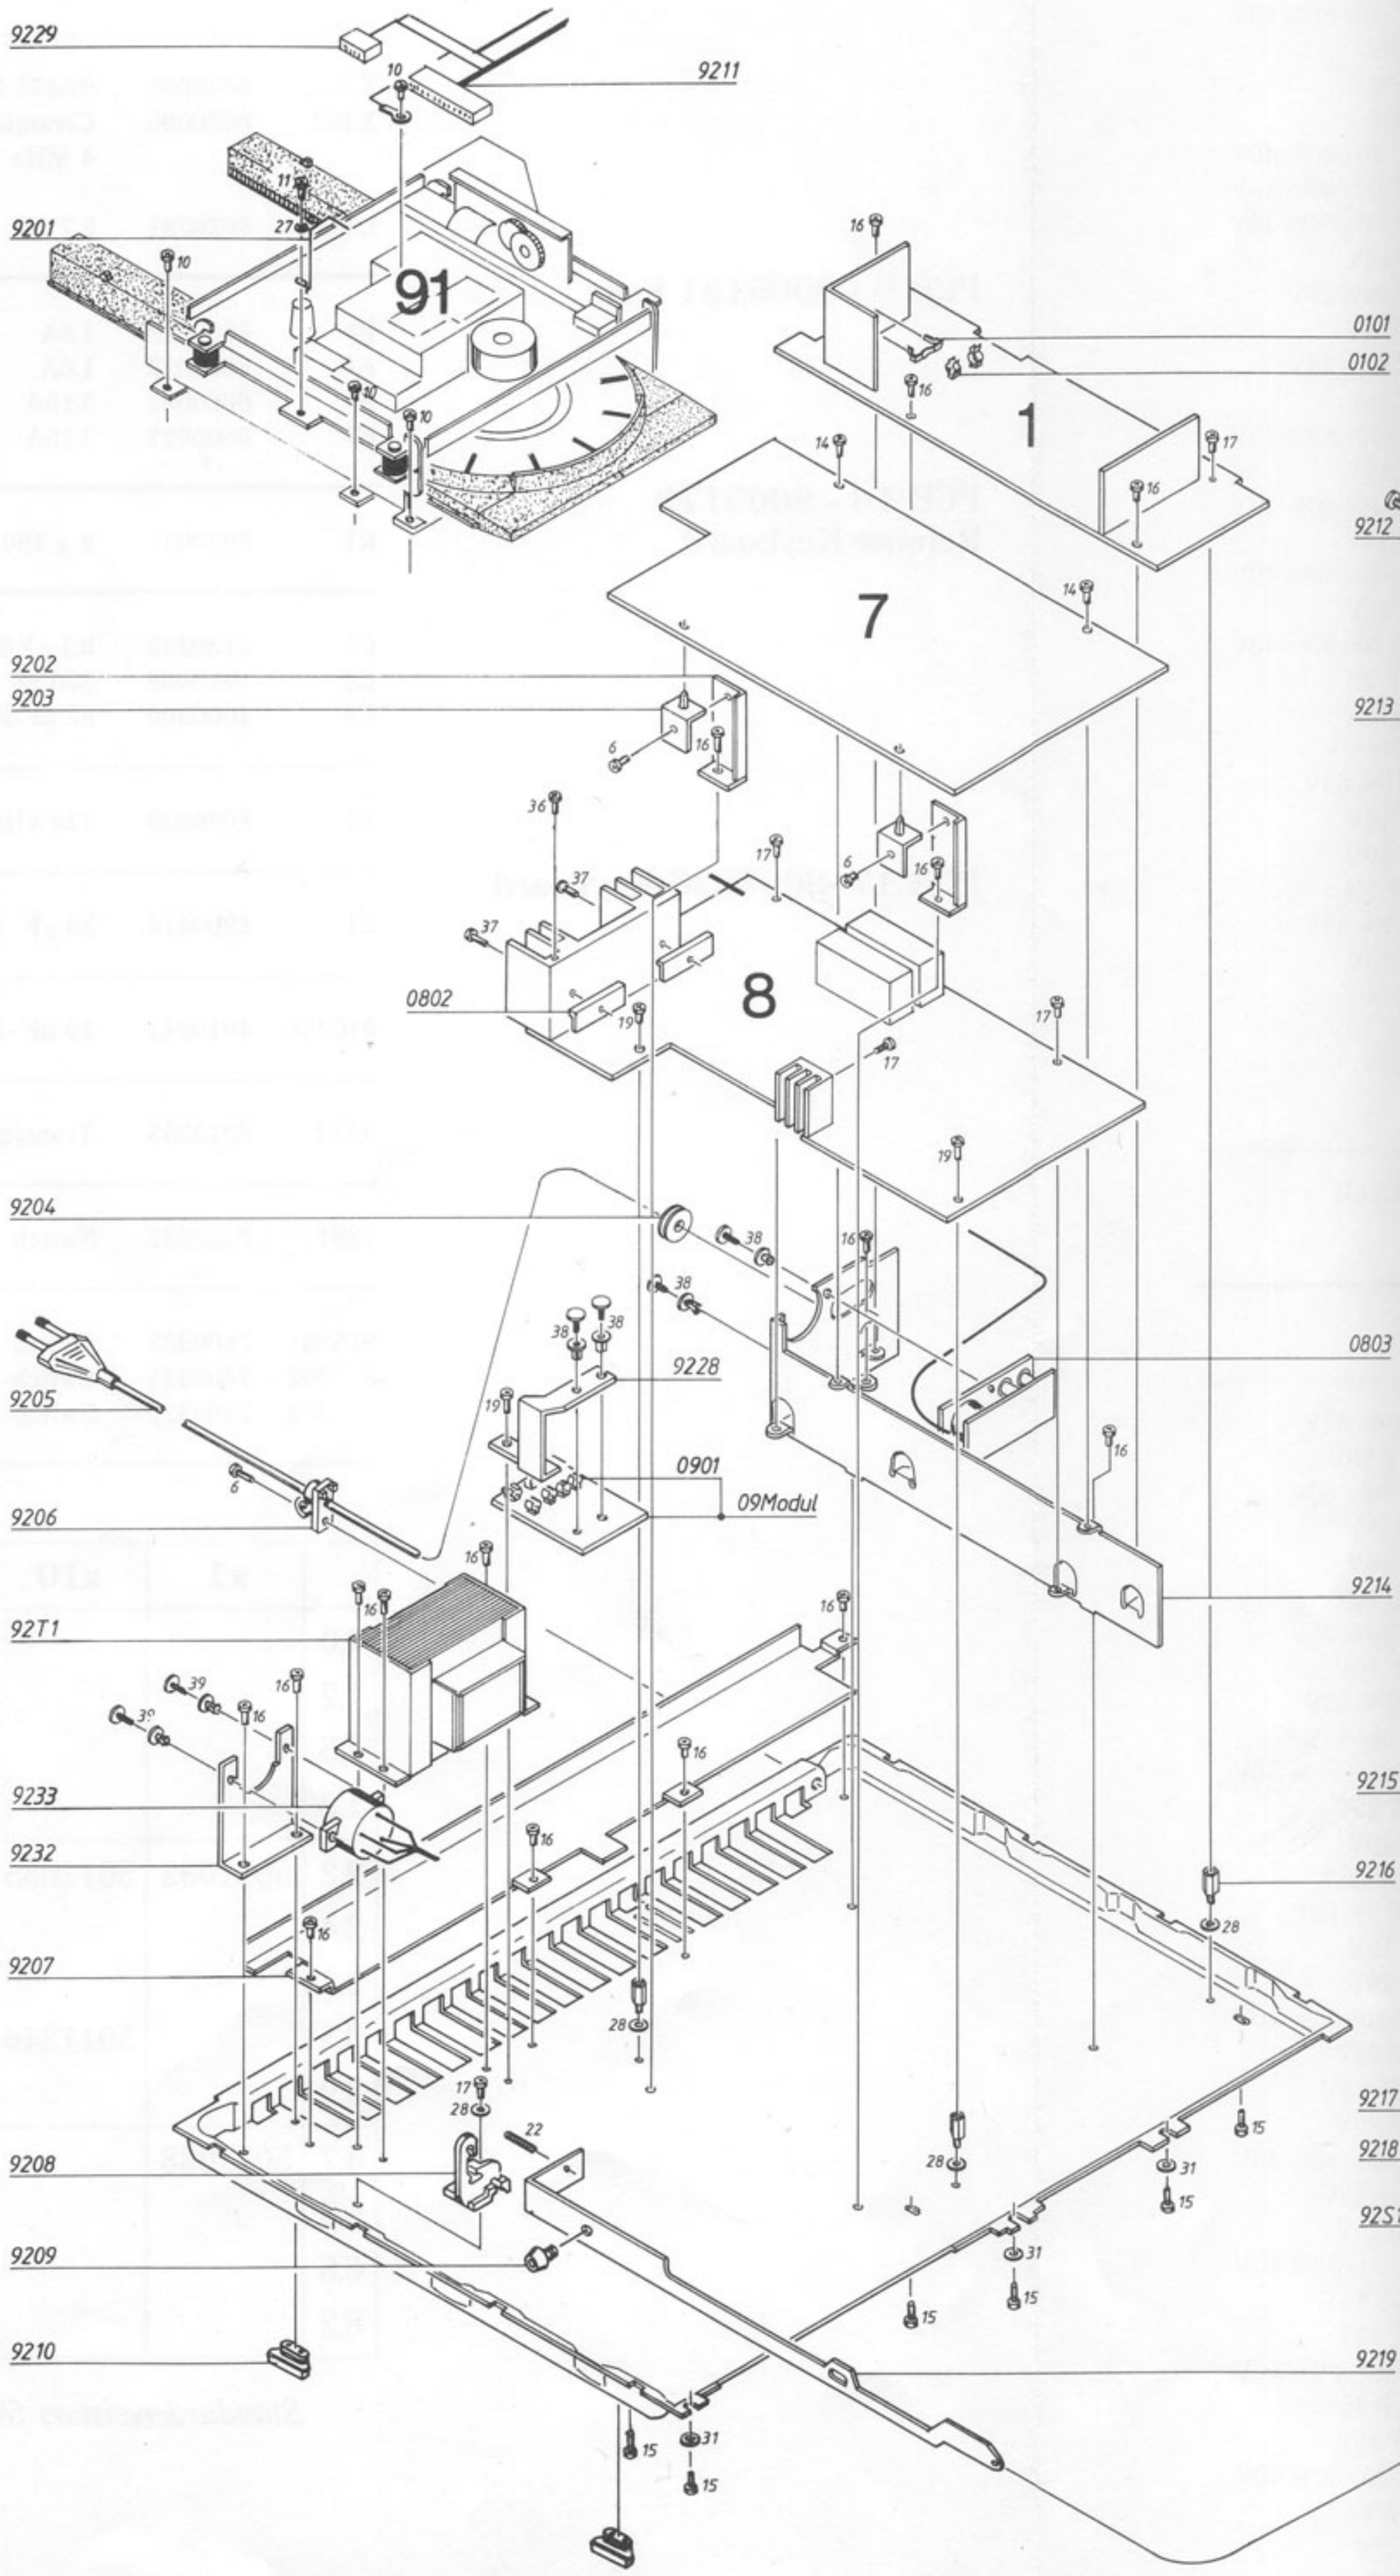

Screws, Washers, etc.

1	2011032	Screw 2.5x6
2	2011310	Screw 2.2x4.5 DIN 7981
3	2622363	Fibre washer 2.2x6.3x0.5
4	2013080	Screw 2.9x9.5
5	2013091	Screw 2.9x6.5 DIN 7981
6	2013094	Screw 2.9x6.5
7	2013107	Screw 2.9x9.5 DIN 7981
8	2034054	Screw AM2x4 DIN 7985
9	2034066	Screw AM2x5 DIN 7985
10	2036035	Screw AM2.6x4 DIN 7985
11	2036036	Screw AM2.5x4 DIN 7985
12	2036052	Screw AM2.6x8 DIN 7985
13	2036053	Screw AM2.6x10 DIN 7985
14	2036054	Screw M2.6x6 w/washer
15	2038070	Screw AM3x6 DIN 912
16	2039026	Screw AM3x4 DIN 7985
17	2039027	Screw AM3x6 DIN 7985
18	2039055	Screw AM3x8 DIN 965
19	2039903	Screw AM3x5 DIN 7985
20	2039906	Screw AM3x10 DIN 965
21	2043016	Screw AM4x10 DIN 7985
22	2072023	Threaded pin M3x10 DIN 551
23	2072104	Threaded pin M3x3 DIN 916
24	2072106	Threaded pin M2.6x4 DIN 916
25	2380011	Nut M3 DIN 934
26	2390001	E-ring 2.3 DIN 6799
27	2622015	Washer 3.2x8x0.5
28	2622041	Washer 3.2 DIN 125
29	2622052	Fibre washer 3.2x8x1
30	2622117	Washer 3.2 DIN 433
31	2622392	Washer 3.2x8x1
32	2622321	Washer 3.2 DIN 9021
33	2622348	Washer 2.3 DIN 125
34	2622395	Fibre washer 3.2x8x0.5
35	2625002	Tooth-lock washer 3.2 DIN 6798
36	2013106	Screw 2.9x16 DIN 7981
37	2039034	Screw AM3x12 DIN 7985
38	2364045	Plastic rivet 4.5
39	2364046	Plastic rivet 6.5
41	2036016	Screw AM2.6x6 DIN 7985

Bang&Olufsen

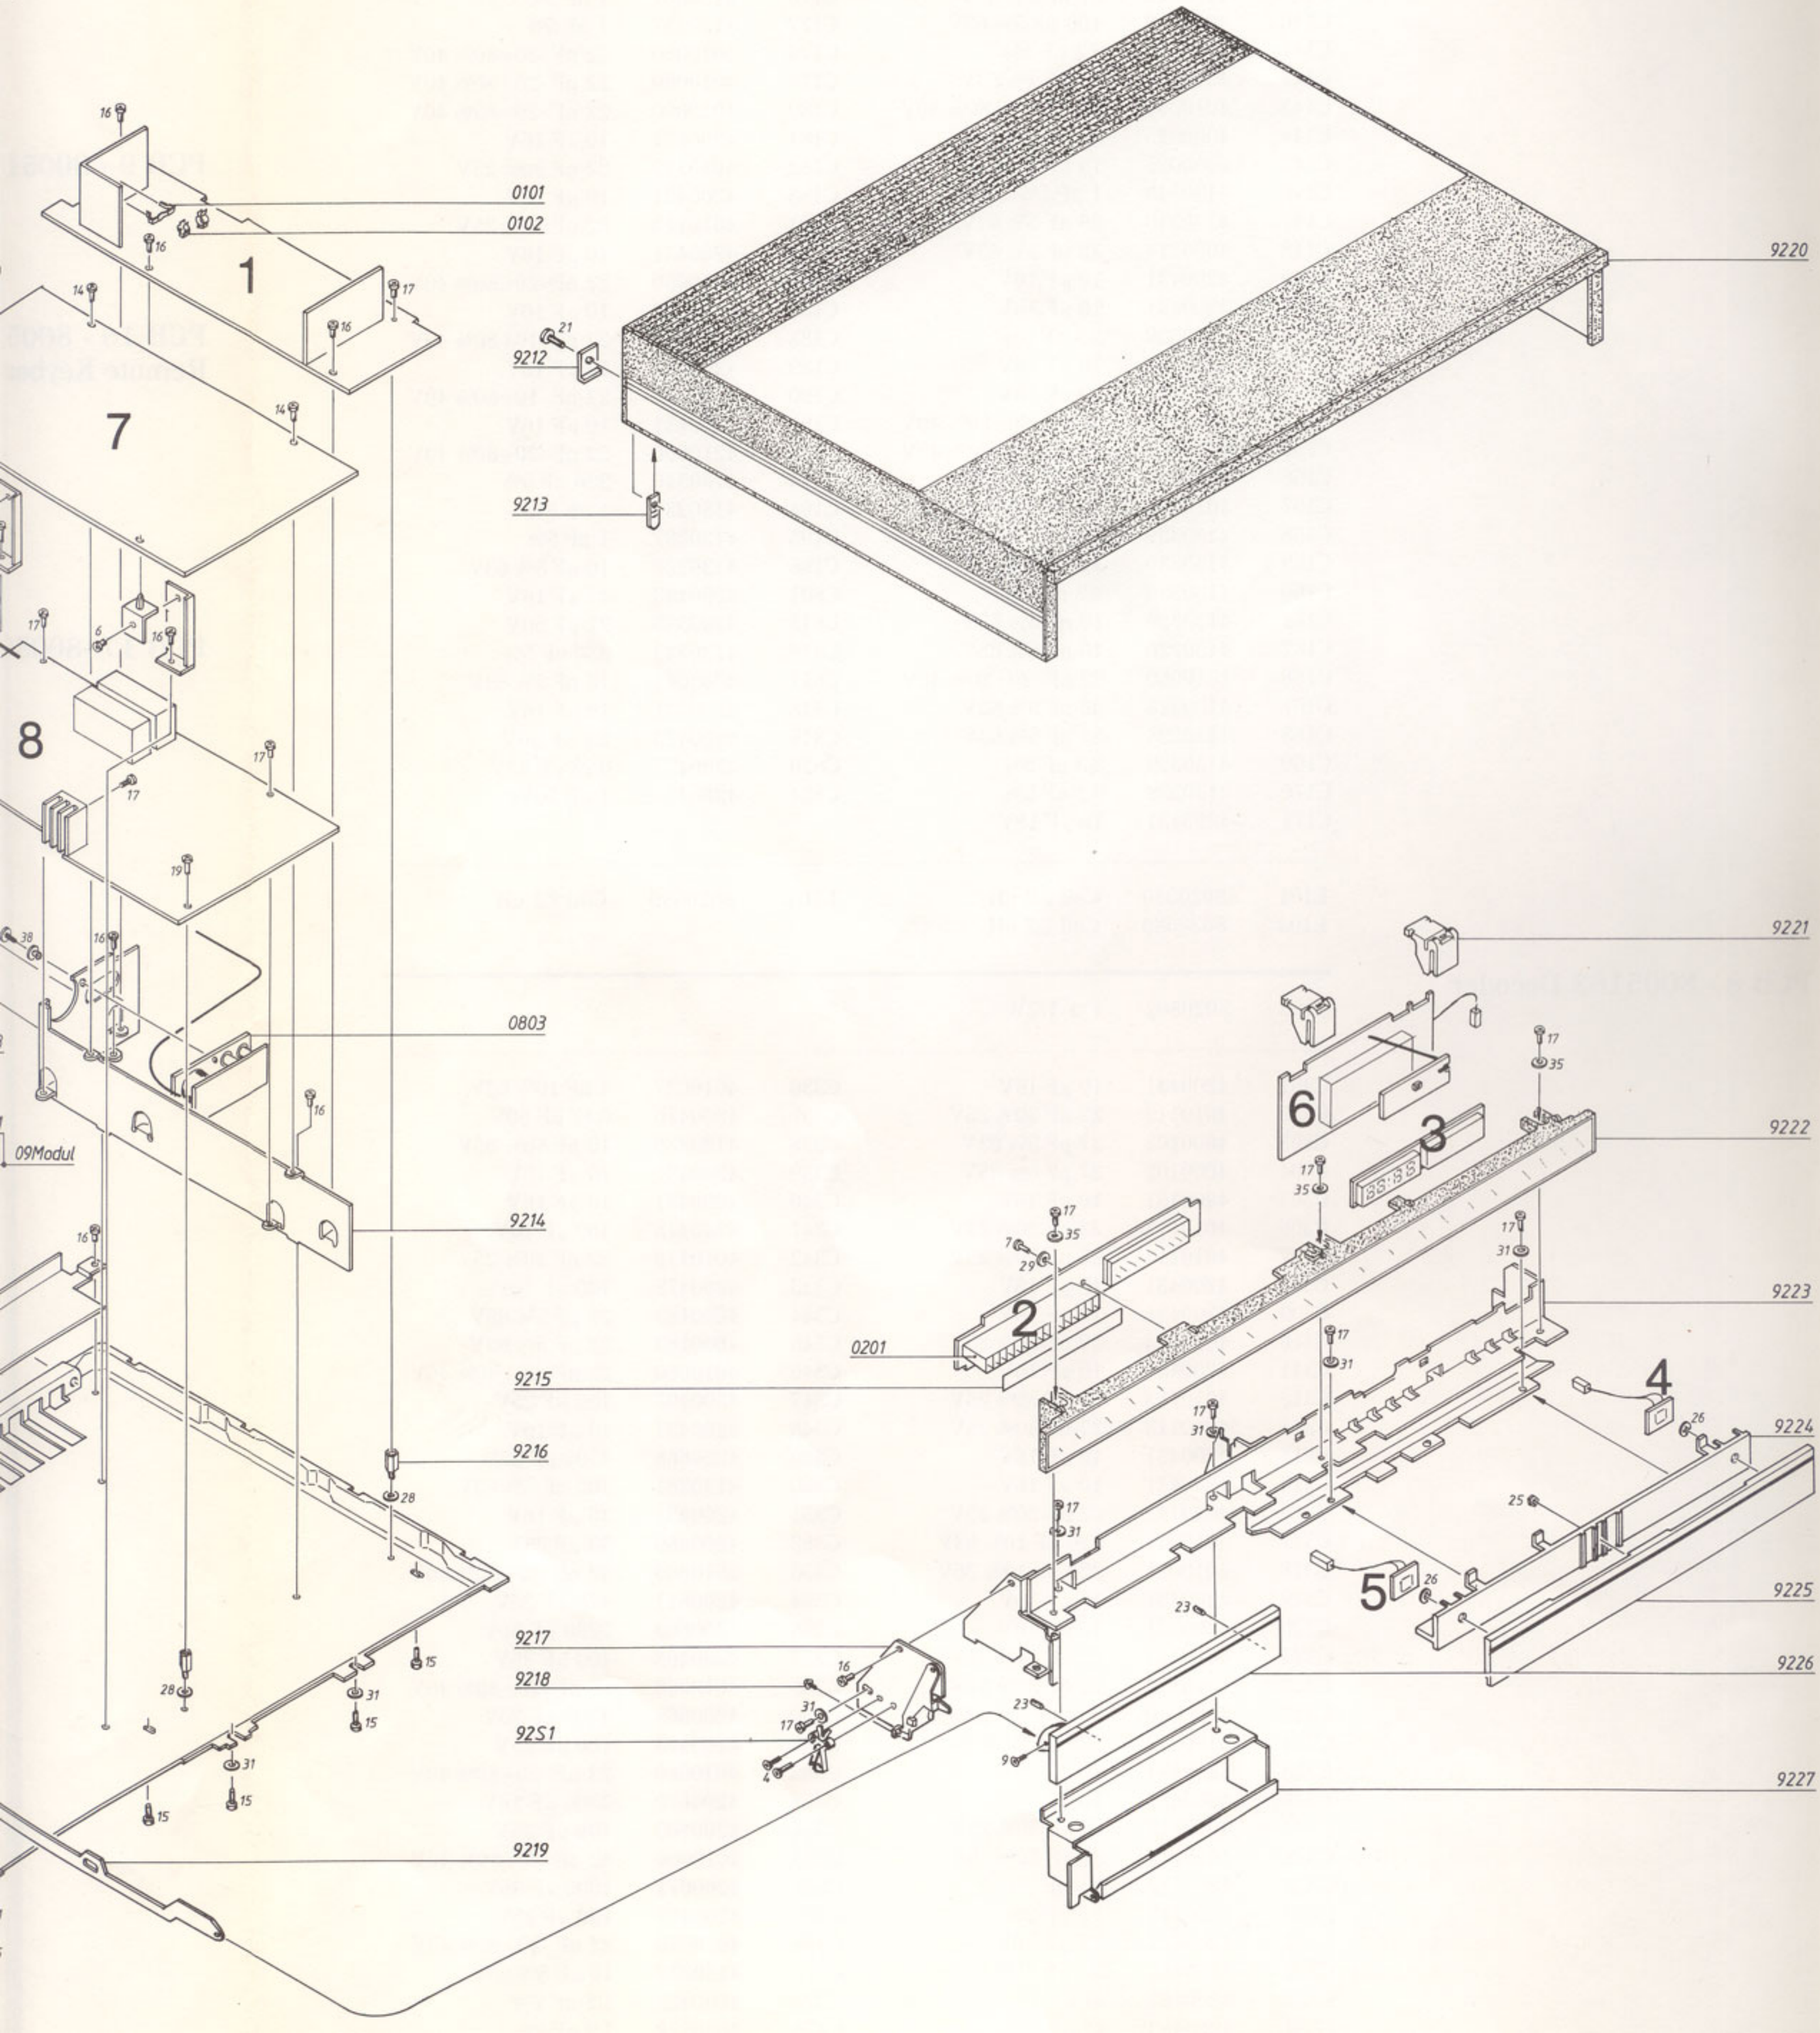

01Modul	8005138	Display and Key control
0101	2816195	Bronze spring
0102	7500214	Holder f/ fuse
02Modul	8005136	PCB - Display, dots
0201	3131250	Housing f/ LED's
03Modul	8330091	PCB - Display, digits
04Modul	8005134	PCB - PLAY
05Modul	8005134	PCB - DISPLAY
06Modul	8005133	PCB - Remote control receiver
07Modul	8005161	PCB - Servo circuit
08Modul	8005162	PCB - Decoder & power supply
0802	2530508	Bracket
0803	8005182	PCB - Socket panel
09Modul	8005181	PCB - Fuse board
0901	7500214	Holder f/ fuse
92T1	8013355	Mains transformer
92S1	7402032	Micro switch

9201	2819210	Grounding spring
9202	2542694	Bracket
9203	3030096	Hinge
9204	2938188	Rubber bushing
9205	6271102	Mains cord (EU)
	6271119	Mains cord (J)
	6271091	Mains cord (AUS)
	6270251	Mains cord (US/CDN)
9206	3152472	Holder
	2938204	Holder (AUS)
9207	3444180	Grid
9208	3014073	Holder
9209	3035118	Stop
9210	3035119	Rubber foot
9211	6275651	Wire bundle 10 pol.
9212	3034073	Bracket
9213	2391059	Bracket
9214	3124104	Bracket
9215	3320065	Screen
9216	2389080	Threaded pin
9217	3124097	Eject mechanism
9218	3341020	Plastic pin
9219	2851181	Arm
9220	3414210	Cabinet
9221	3152341	Holder
9222	3131237	Display window/ with repeat
	3131275	Display window/ with SCAN PLAY
9223	3454334	Bracket
9224	3168490	Moulding
9225	2568715	Panel, PLAY - DISPLAY
9226	3162189	Panel, OPEN
9227	2542637	Bracket
9228	2542673	Bracket
9229	6275652	Wire bundle 5 pol.
9232	2542672	Bracket
9233	7400332	Voltage Selector

9101	3152504	Binder	9130	2851201	Lift arm
9102	3151239	Bracket	9131	2938241	Rubber ring
9103	2917002	Ball	9132	2726152	Disc holder, lower
9104	8055032	Laser block	9133	2810204	Spring
9105	2917002	Ball	9134	2810204	Spring
9106	3907052	Cushion	9135	3034071	Lock
9107	2560187	Slide panel	9136	2548222	Bracket
9108	3114256	Base	9137	2810205	Spring
9109	2700046	Tooth section	9138	2622396	Washer
9110	3300109	Cover	9139	3017026	Cam-wheel
9111	3151239	Bracket	9140	2930096	Cam-wheel
9112	2917002	Ball	9142	2816219	Leaf spring
9113	2830123	Shaft	9143	2542671	Bracket
9115	3946061	Cover	9144	3015149	Guide, righthand-back
9116	3907052	Cushion	9145	3907053	Rubber suspension
9117	2726137	Disc holder, upper	9146	3015148	Guide, righthand-front
9118	3112311	Chassis	9147	3015147	Guide, lefthand - front
9119	2816218	Leaf spring	9148	3010025	Holder, front
9120	2542670	Bracket	9149	3450670	Tray
9121	2938240	Rubber bushing	9150	2548221	Bracket
9122	2810203	Spring	9151	3010023	Holder, back
9123	3151240	Holder	9152	2938242	Cover, disc sensor
9124	2812110	Spring	9153	3015150	Guide, lefthand - back
9126	2732079	Rubber belt	9155	3151241	Holder, disc sensor
9127	2700047	Gear-wheel	9156	3112212	Sub-chassis
9128	2722046	Pulley	9157	2036055	Screw, special
9129	2700048	Gear-wheel			

91M101	2755027	Bracket w/carrier motor
91M102	8400147	Disc motor
91M301	8400151	Load motor w/pulley

91S301	7400322	Switch
91S302	7400331	Slide switch
91S303	7400322	Switch

91TR339	8320665	Disc sensor, photo transistor
91D333	8330166	Disc sensor, LED

Parts Not Shown

3391630	Packing f/CD-Terminal
6270213	Connector cable
8950050	Remote control kit

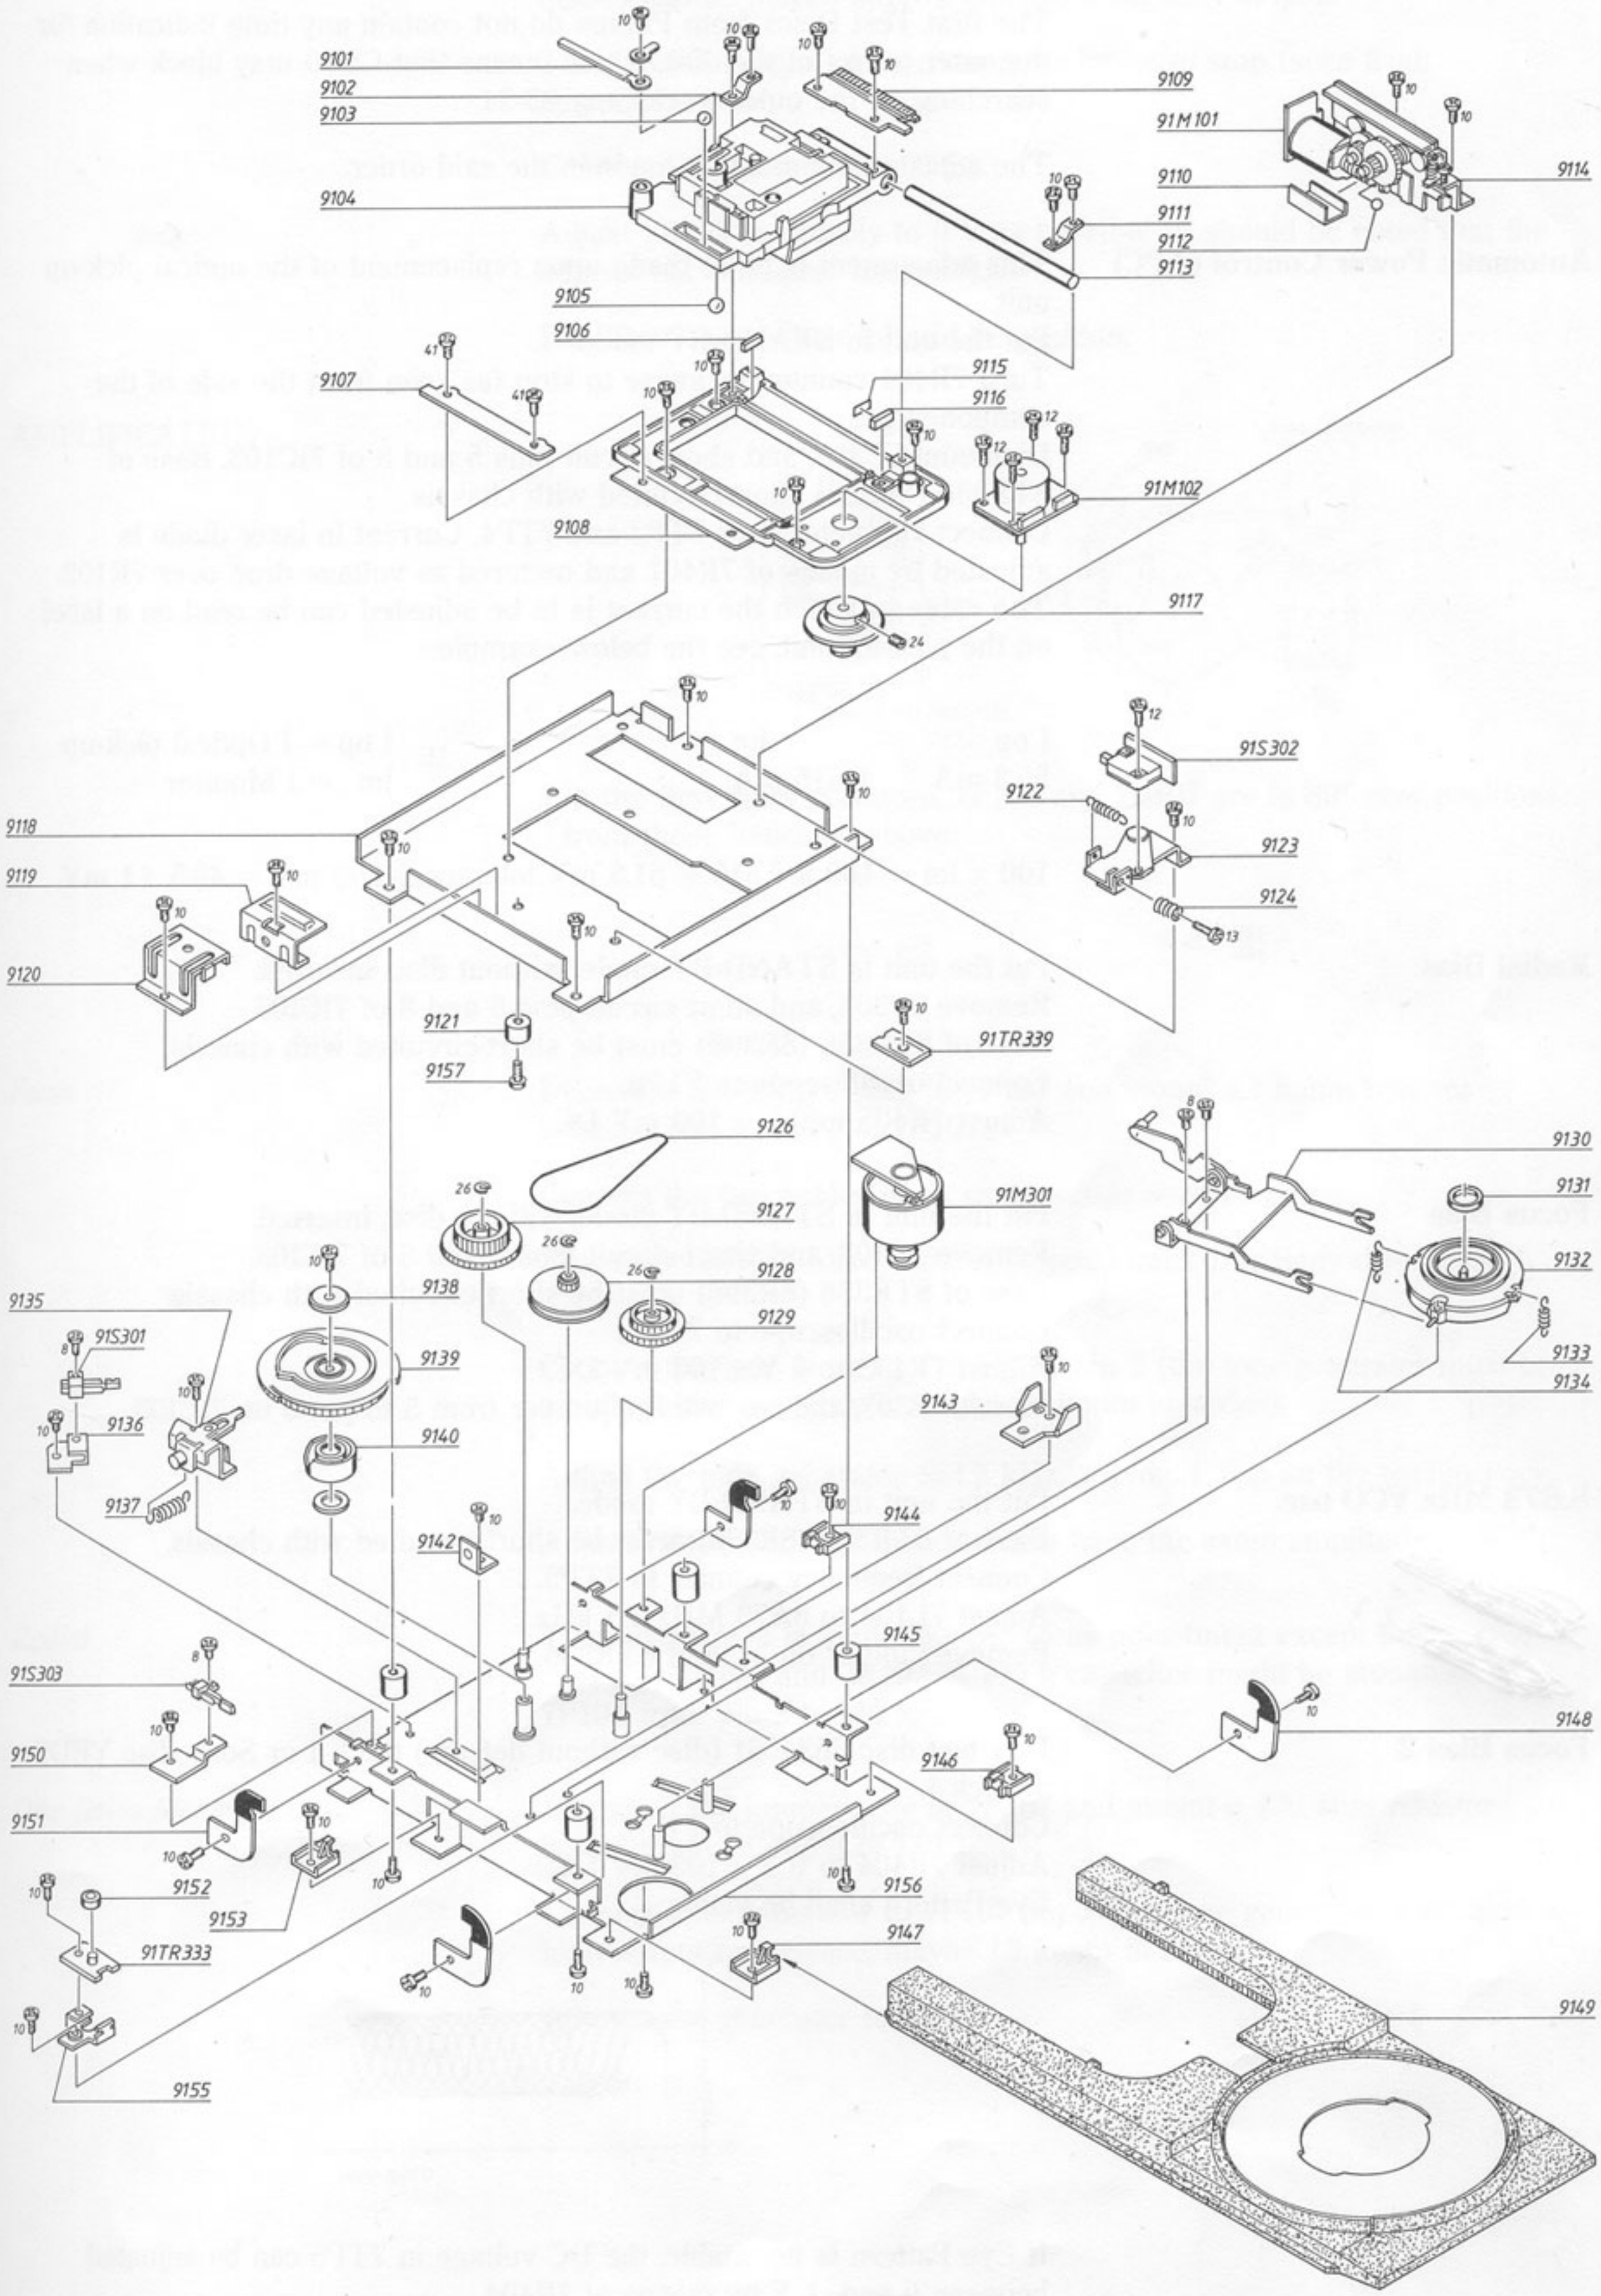
9101
9102
9103
9104
9105
9106
9107
9108
9109
91M101
9110
9111
9112
9113
9114
9115
9116
91M102
9117
9118
9119
9120
9121
9157
91TR339
91S302
9122
9123
9124
9126
9127
9128
9129
9130
9131
9132
9133
9134
91M301
9135
91S301
9136
9137
9138
9139
9140
9142
9143
9144
9145
91S303
9150
9151
9152
9153
91TR333
9155
9156
9147
9148
9146
9149

4-4

CD terminal, 8850050

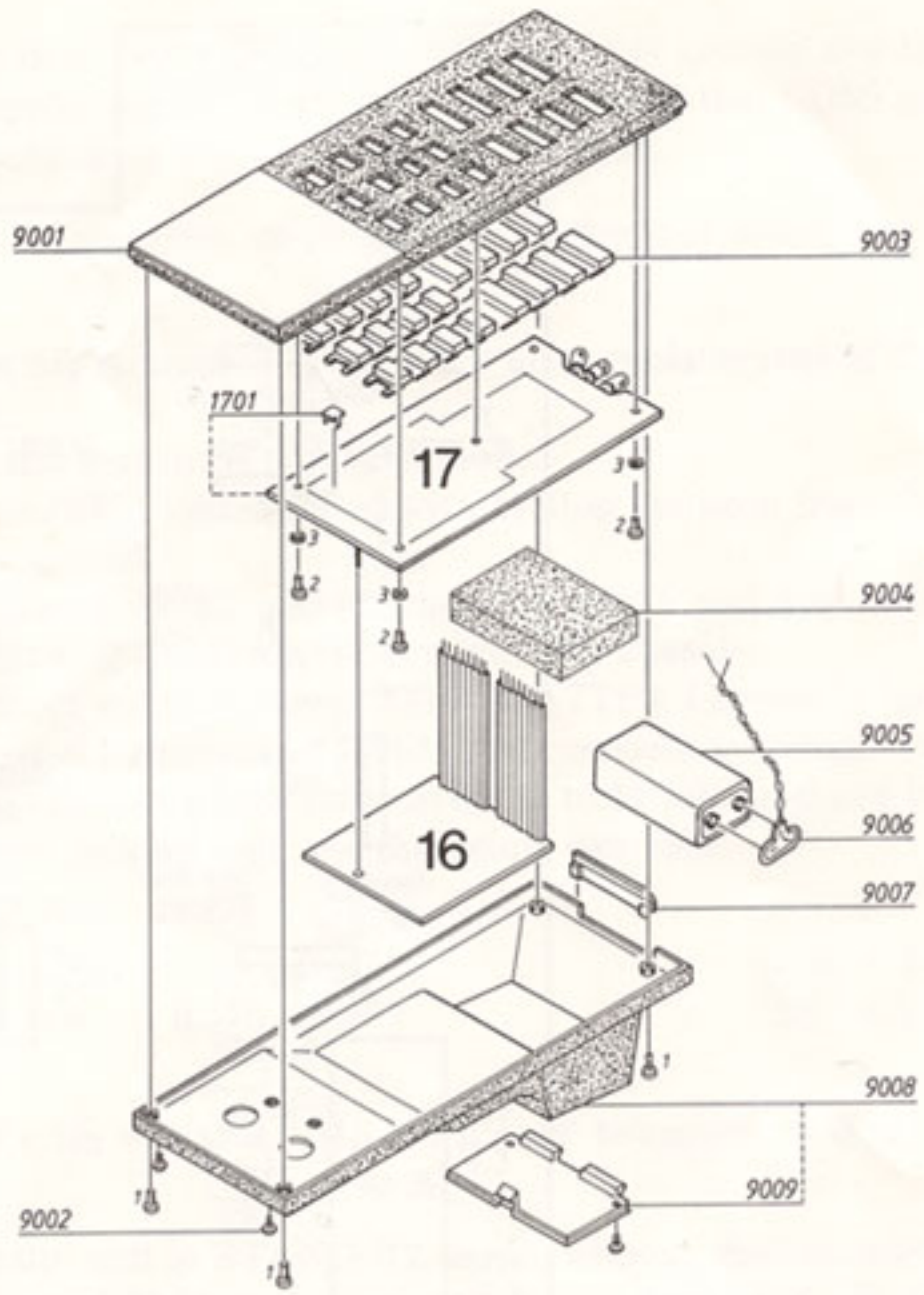

16Modul	8005179	PCB - Remote transmitter
17Modul	8005026	PCB - Remote Keyboard
1701	7500148	Key switch

9001	3168677	Panel	9006	7229020	Battery connector
9002	3010007	Plastic foot	9007	3322058	Window
9003	2776052	Set of buttons	9008	3454347	Bottom
9004	3917036	Foam block	9009	3160032	Cover
9005	8700000	Battery 9 V alkaline			

Packing procedure

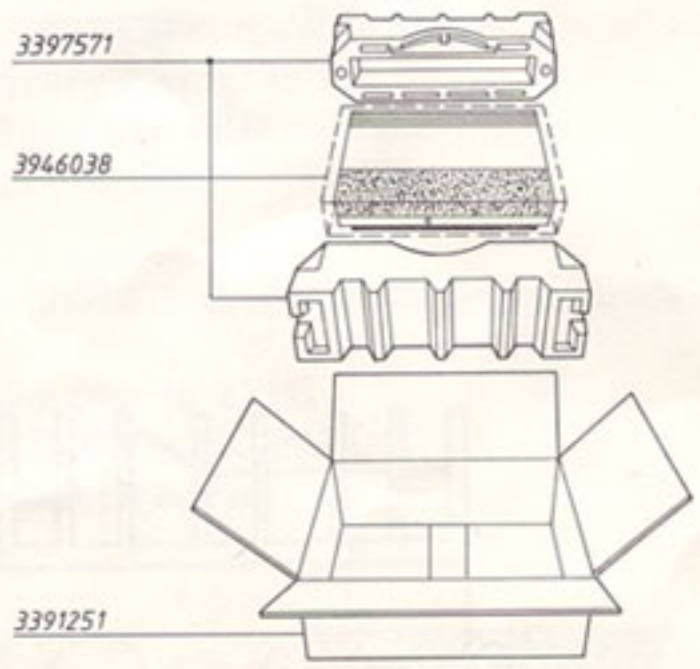

5-1

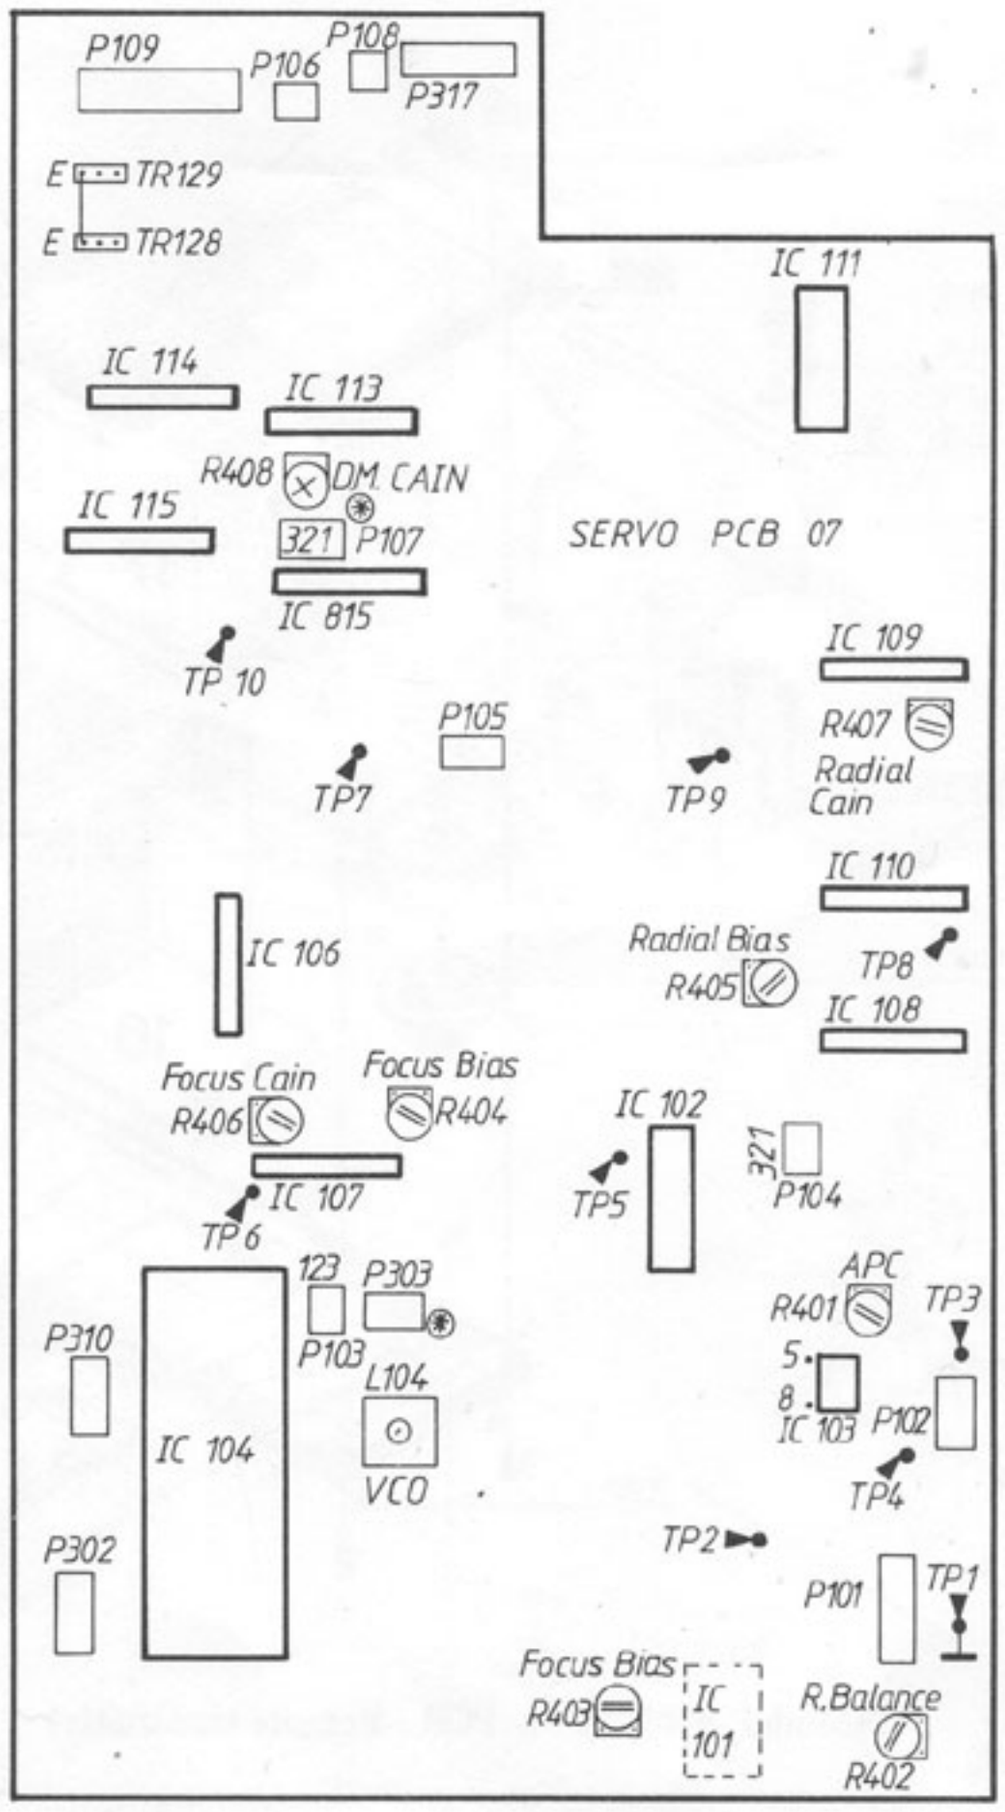

* In the first units produced the PCB lay-out is slightly different from the drawing here. The main differences are:

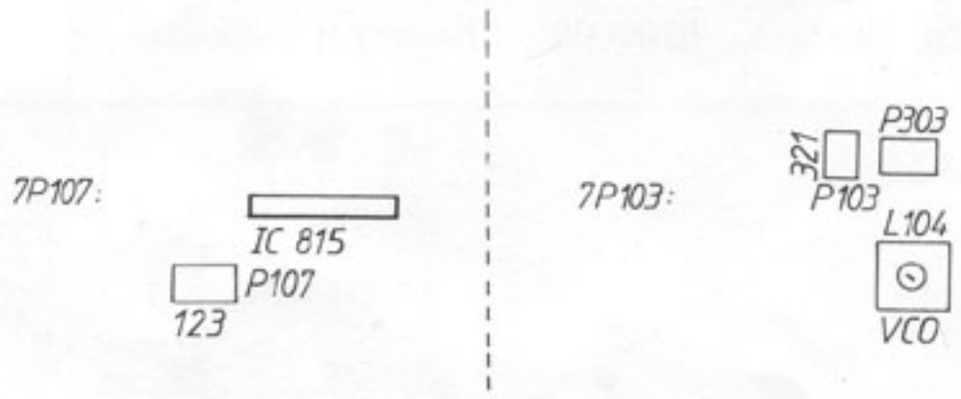

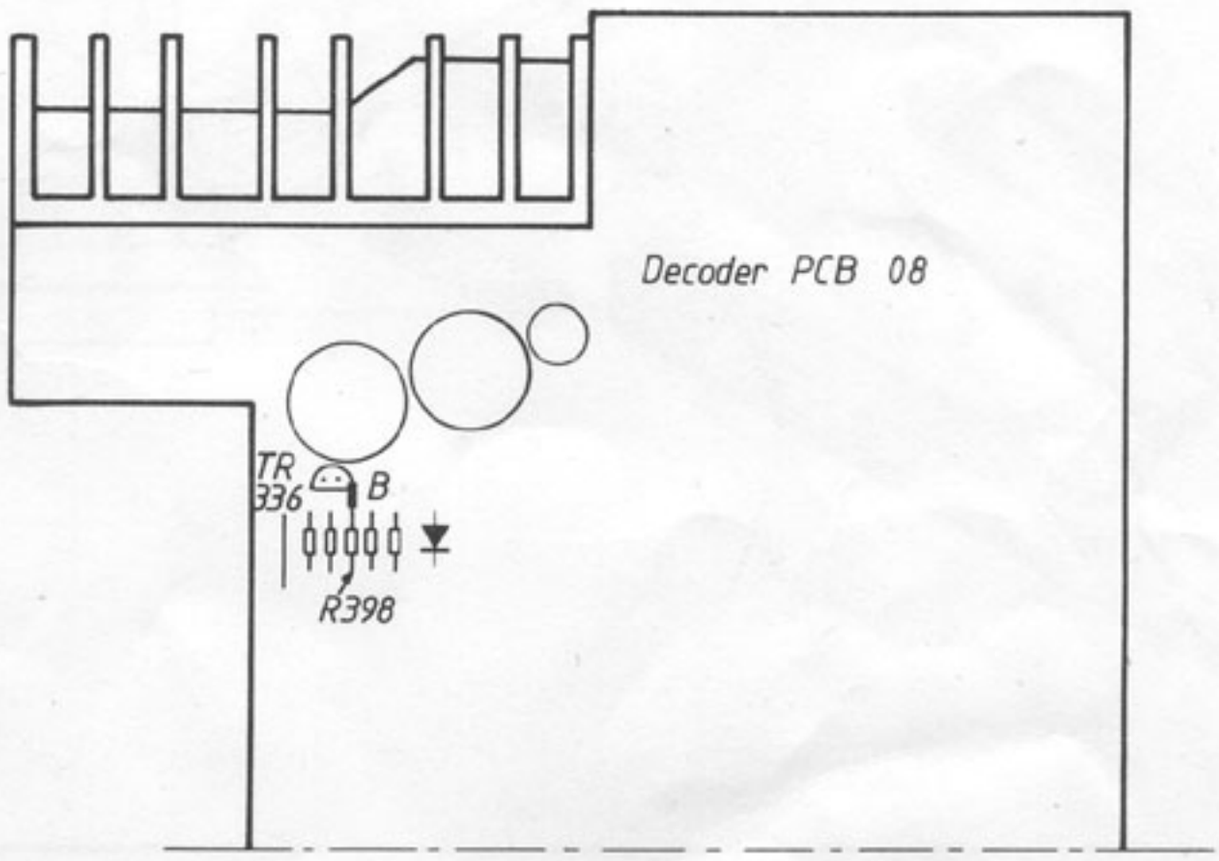

Rienen 49 ± 1,2

Bang&Olufsen

ADJUSTMENTS

NB! When using Test Disc 3634031 (Disc without defects from Philips):

The first Test Discs from Philips do not contain any time indication for the outer tracks of the disc, which means that CD50 may block when searching on the outer tracks, e.g. 23-24.

The adjustments must be made in the said order.

Automatic Power Control (APC)

This adjustment is to be made upon replacement of the optical pick-up unit.
Put the unit in STAND-BY mode.
Turn 7R401 counterclockwise to stop (as seen from the side of the component).
Dismount 7P303, and short-circuit pins 5 and 8 of 7IC103. Base of 8TR336 (8R398) short-circuited with chassis.
Connect voltmeter over 7TP3 and 7TP4. Current in laser diode is adjusted by means of 7R401 and metered as voltage drop over 7R102.
The value to which the current is to be adjusted can be read on a label on the pick-up unit, see the below example:

I op	Im	
55.3 mA	0.515 mA	I op = I Optical pick-up Im = I Monitor

100 x Im = 100 x 0.515 = 51.5 mV tolerance -1/-3 mV = 49.5 ±1 mV

Radial Bias

Put the unit is STAND-BY mode, without disc. inserted.
Remove 7P303, and short-circuit pins 5 and 8 of 7IC103.
Base of 8TR336 (8R398) must be short-circuited with chassis.
Connect oscilloscope to 7TP8.
Adjust 7R405 to 0 V ±100 mV DC.

Focus Bias

Put the unit in STAND-BY mode, without disc. inserted.
Remove 7P303, and short-circuit pins 5 and 8 of 7IC103.
Base of 8TR336 (8R398) must be short-circuited with chassis.
Connect oscilloscope to 7TP6.
Adjust 7R403 to 0 V ±100 mV DC.
Mount 7P303, and remove the jumper from 5 to pin 8 on 7IC103.

8.673 MHz VCO osc.

Put the unit in STAND-BY mode.
Base of 8TR336 (8R398) must be short-circuited with chassis.
Connect frequency counter to 7TP5.
Adjust 7L104 to 8.673 MHz ±5 kHz.
Remove jumper on base of 8TR336.

Focus Bias 2

Play test disc 3634031 (disc without defects) track 1 or Sony disc YEDS 5 track 1.
Connect oscilloscope to 7TP6.
Adjust 7R404 to 0 V ±100 mV DC.
Eye Pattern shall be stable.

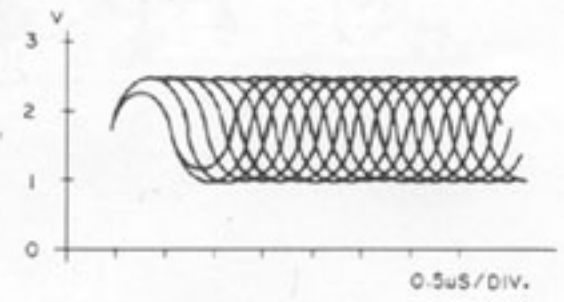

If Eye Pattern is not stable, the DC voltage in 7TP6 can be adjusted between 0 and -1 V by means of 7R404.

Radial Balance

Play test disc 3634031 (disc without defects) or Sony disc YEDS 5. Both discs must be played approx. 30 min. from start of disc.

Turn 7R407 (Radial gain) counterclockwise to stop (seen from component side).

Connect DC voltmeter to 7TP8.

Adjust 7R402 as closely to 0 V as possible (it should be noted that the adjustment can seem unstable).

Put 7R407 in mechanical middle position.

AMPLIFICATION

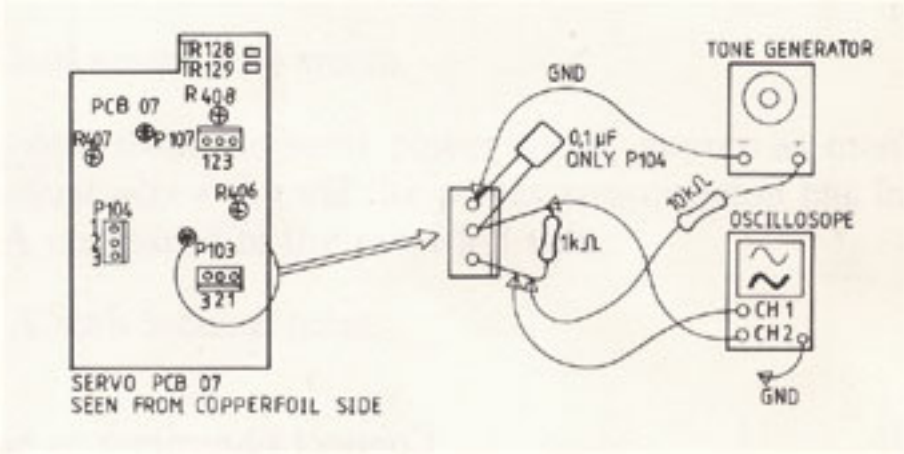

* In the first units produced, 7P103 and 7P107 are in different positions from those indicated above:

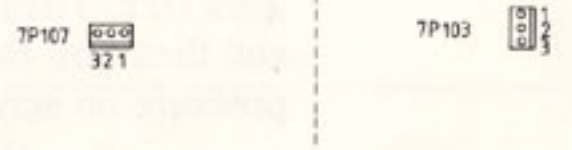

Focus

Dismount the jumper plug in 7P103 and mount a 1 kohm resistor between pins 2 and 3 of 7P103.

Connect the two cables of an oscilloscope over 10 kohm.

Test disc 3634031 (disc without defects) track 1 or Sony disc YEDS 5 track 1.

Connect the tone generator to 7P103 pin 3 (the tone generator must have a high output impedance, maybe 10 kohm in series).

Adjust the tone generator to 1.2 kHz, approx. 1 Vpp on the oscilloscope..

Adjust 7R406 until the two channels have the same amplitude.

Radial

This adjustment is made like the focus adjustment except that in this case it is 7P104 and 7R407. A 100 n capacitor might be mounted on 7P104 from pin 2 to pin 1.

Disc Drive Motor

Dismount the jumper plug in 7P107 and mount a 470 ohm resistor between pins 2 and 3 of 7P107.

Connect tone generator to 7P107 pin 3 (the tone generator must have a high output impedance, maybe 10 kohm in series).

Adjust tone generator to 20 Hz.

Actuate play.

Connect oscilloscope to one of the driver outputs for the disc drive motor, e.g. the emitter of 7TR128/129.

Turn up tone generator output until clipping occurs on the oscilloscope, and then turn it down until the signal just stops clipping.

Connect the two oscilloscope channels over 470 ohm.

Adjust 7R408 until the two channels have the same amplitude.

Switch 302
(OPU Inner Limit)

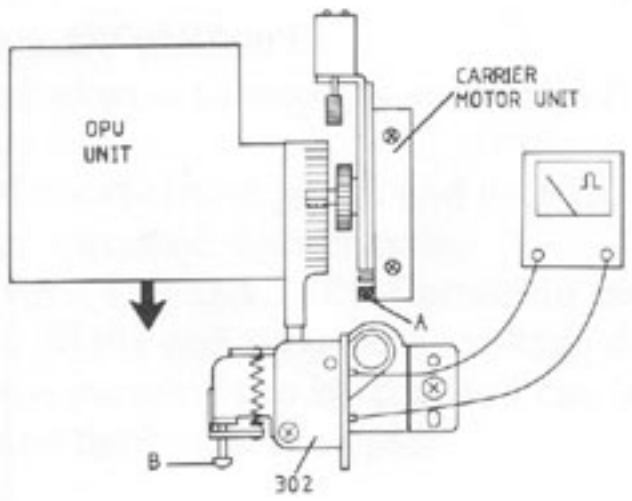

Connect ohmmeter to switch 302.

Turn screw A upwards, the carrier motor unit is lifted by screw A, and the OPU unit is drawn forward in the direction of the arrow to mechanical stop. If switch 302 goes ON, turn screw B outwards until the switch goes OFF. Then turn the screw B inwards until the switch just goes ON, and then turn the screw exactly two turns further inwards. (Do not apply pressure on screw B while adjusting as that might affect the adjustment).

Lock screw B with locking paint.

Carefully turn screw A downwards to mechanical stop, and then two turns upwards.

Lock screw A with locking paint.

Turntable Height



Press the motor down in the direction of the arrow.

Adjust with screw A to the indicated spacing by means of the supplied Allen key.

Carrier Motor

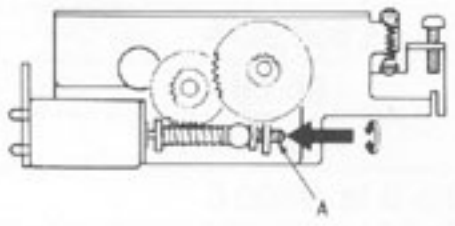

The carrier motor unit must be dismounted, and there must be no load by the ball on the worm.

Connect motor to a 4.5 V DC external power-supply.

Read out and note the power consumption. The consumption is typical 60-75 mA.

Tighten the ball against the worm.

Supply the motor from the same power-supply source as mentioned above, and adjust screw A until the power consumption has increased to 5 mA ±2 mA compared to the recorded value.

Lock screw A with locking paint.

Tilting panel for disc load mechanism (OPEN panel)

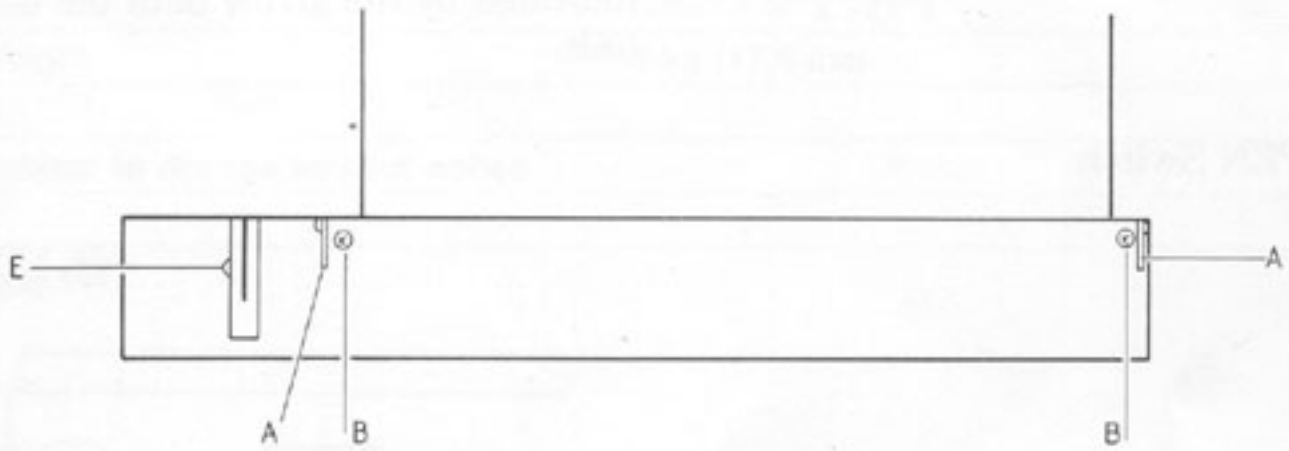

Mounting of tilting panel

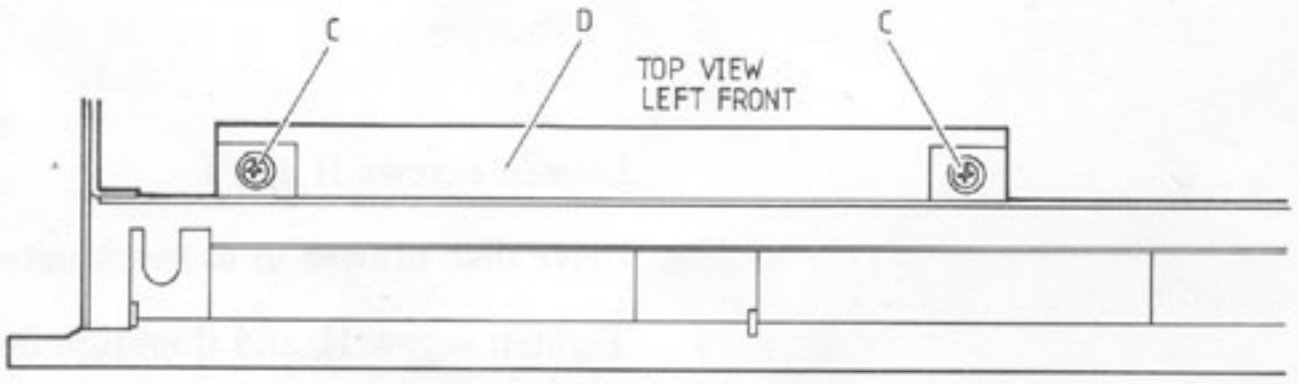

(NOTE! the disc drawer can be driven out manually by turning the big cam-lifting wheel behind the mechanical drive unit.

When mounting the tilting panel, place the mounting brackets A in the middle of the tilting panel grooves, and tighten screws B slightly.

Tilt the tilting panel up and manipulate it on the mounting brackets until the upper edge of the tilting panel is level with the upper edge of the front panel and parallel to the display panel.

Loosen screws C, and with the tilting panel tilted up, adjust the bracket D until the outer edge of the tilting panel is level with the outer edge of the front panel and the display panel.

Screw the tilting panel together with the long bracket in the left-hand side of the unit with screw E. The tilting panel and the long bracket must not be *clamped* together, they must be able to move without friction.

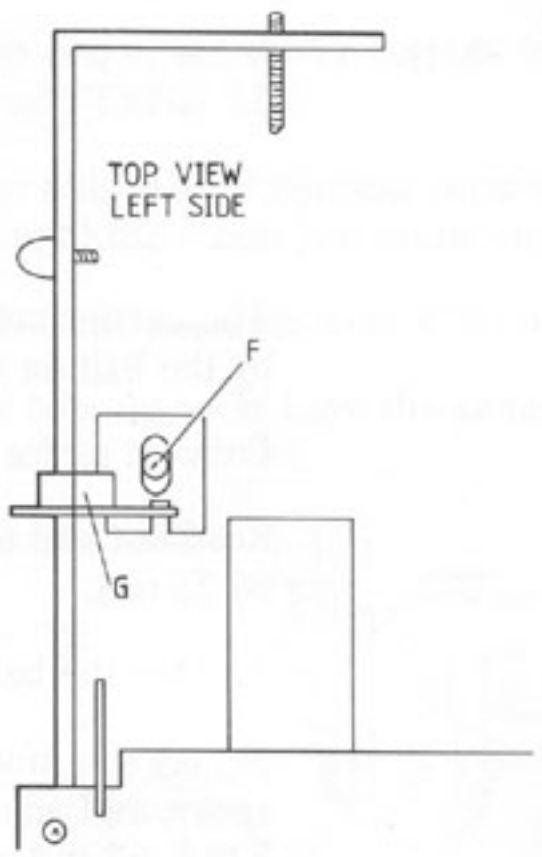

Drive disc drawer out to stop.

Loosen screw F, and move the stop bracket G in one of the directions indicated by the arrow until the tilting panel is parallel to the base of the unit.

OPEN Switch

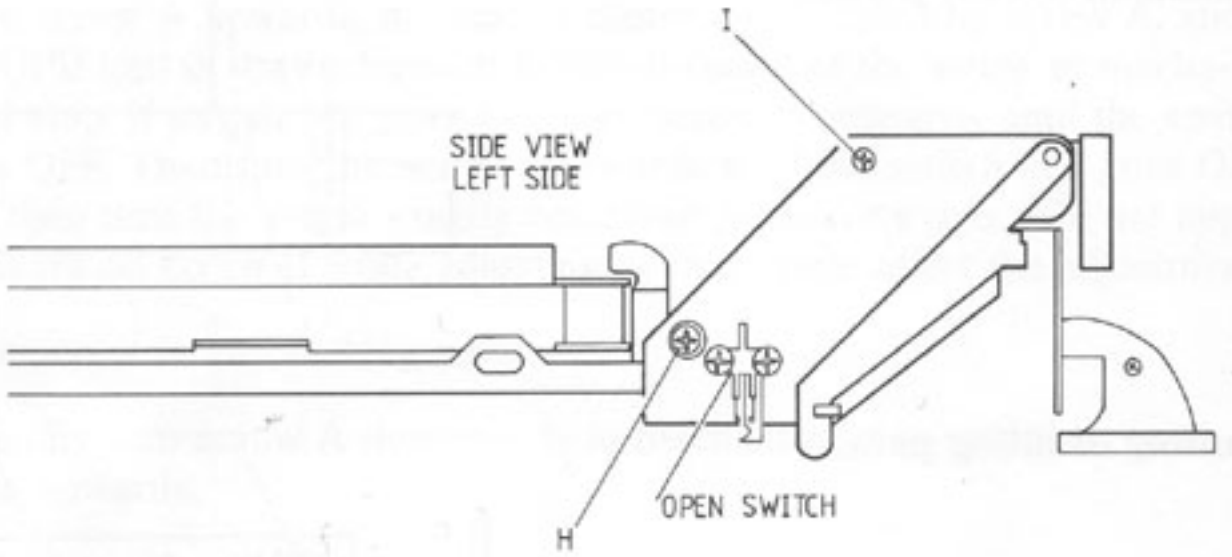

Loosen screws H and I.

Drive disc drawer in to mechanical stop.

Tighten screw H, and then tighten screw I.

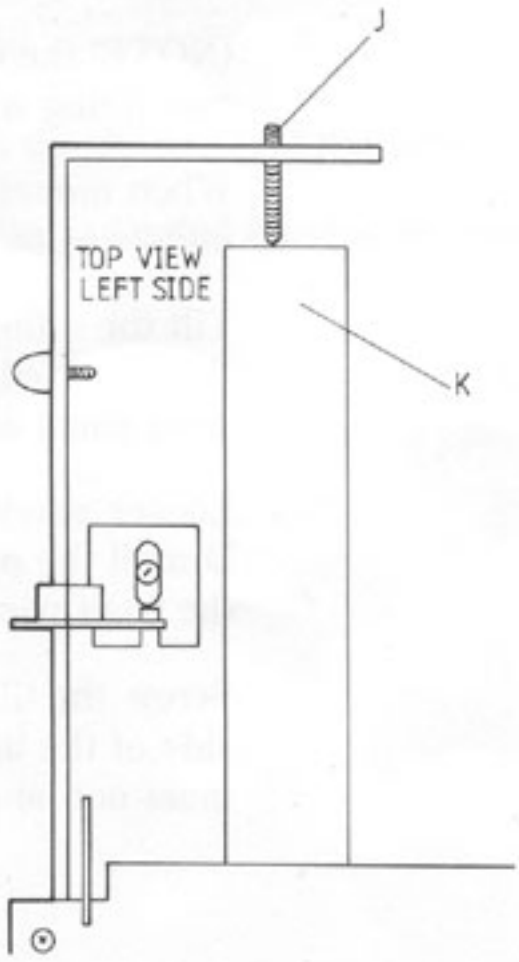

Adjust screw J until tilting panel is vertically level with the front panel.

Check: When actuating OPEN on the tilting panel, there must be space between screw J and bar K.

TECHNICAL SPECIFICATIONS

Frequency range	4-20,000 Hz ±0.3 dB
Signal-to-noise-ratio	>95 dB
Dynamic range	>95 dB
Harmonic distortion	0.003% at 0 dB
Channel separation	>94 dB
Channel difference	<0.5 dB
Converter system	16 bit, oversampling 88.2 kHz
Low pass filter	Digital + analogue
Damping >20,000 Hz	>60 dB
Output	2 V RMS at 0 dB
Power supply	Type No. 5111: 220 V
	Type No. 5112: 240 V
	Type No. 5113: 120 V
	Type No. 5114: 100 V (120 V selector)
	Type No. 5115: 240 V
Power frequency	50-50 Hz
Power consumption	28 watts
Dimensions W x H x D	42 x 7.5 x 32.5 cm
	(16½" x 3" x 12¾")
Weight	8 kg (17.6 lbs)

Subject to change without notice

DISMANTLING

Cabinet

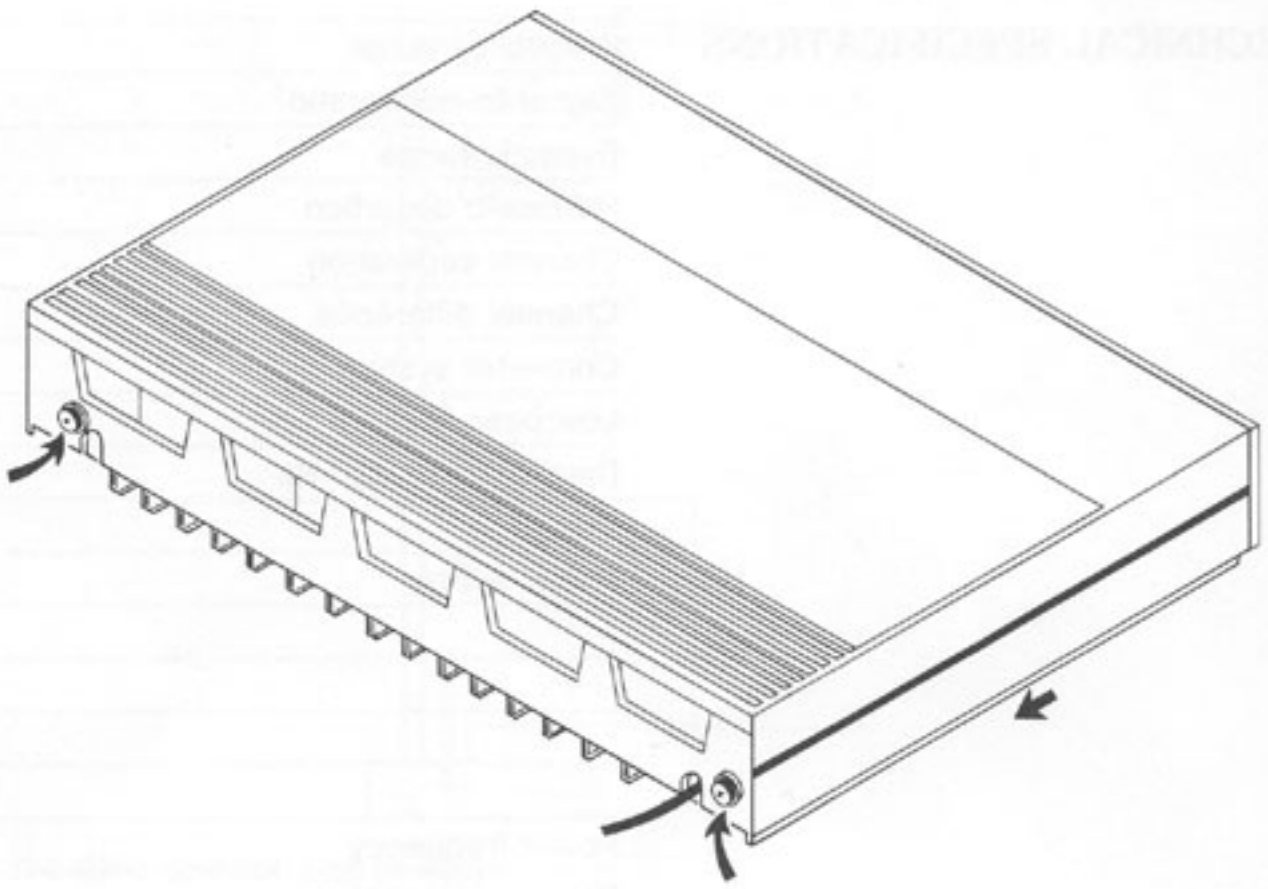

Loosen the two screws at the rear edge and lift.
Push cabinet approx. 1 cm backwards; it can now be lifted off.

PCB7

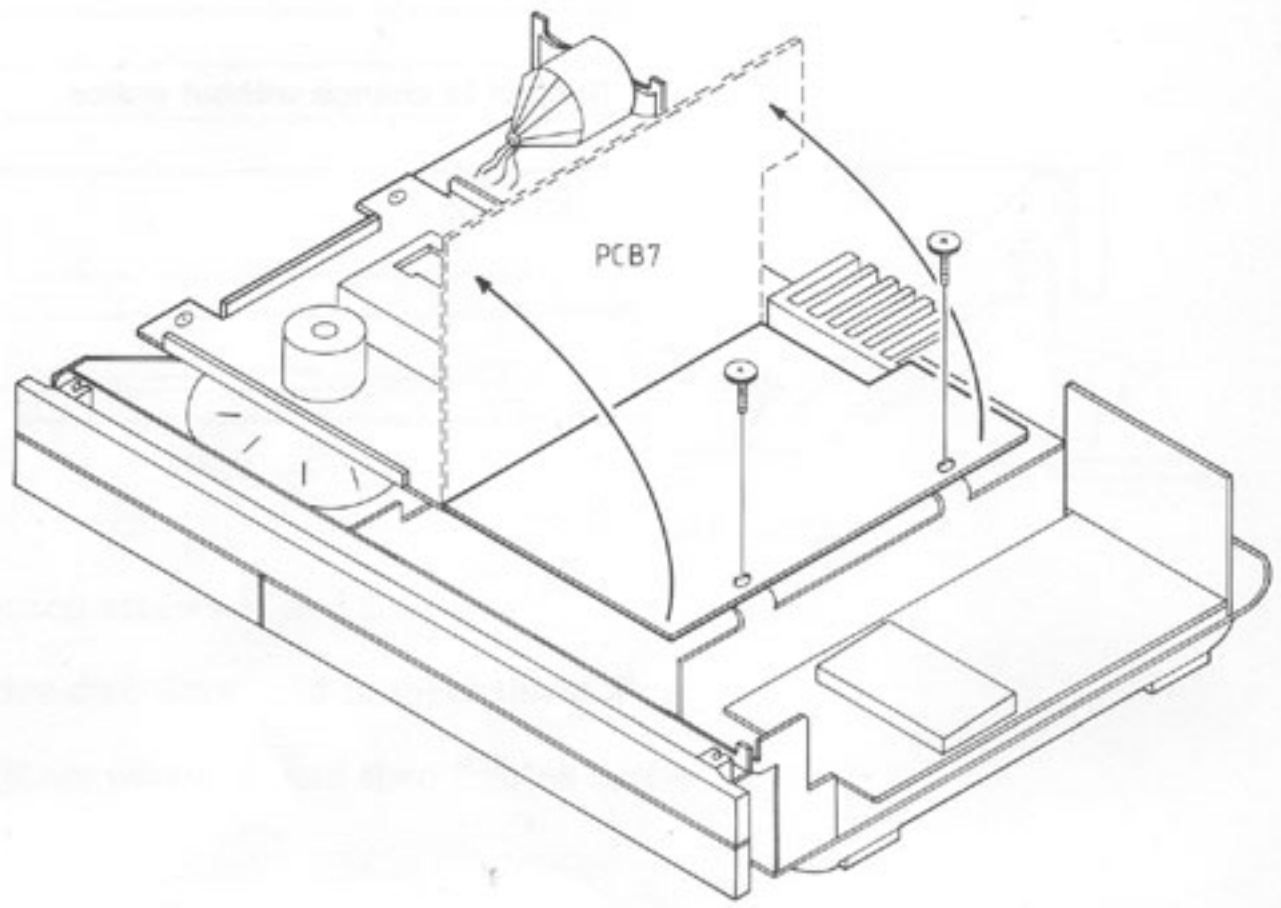

Remove the two screws.
PCB7 can now be placed in service position.

PCB8

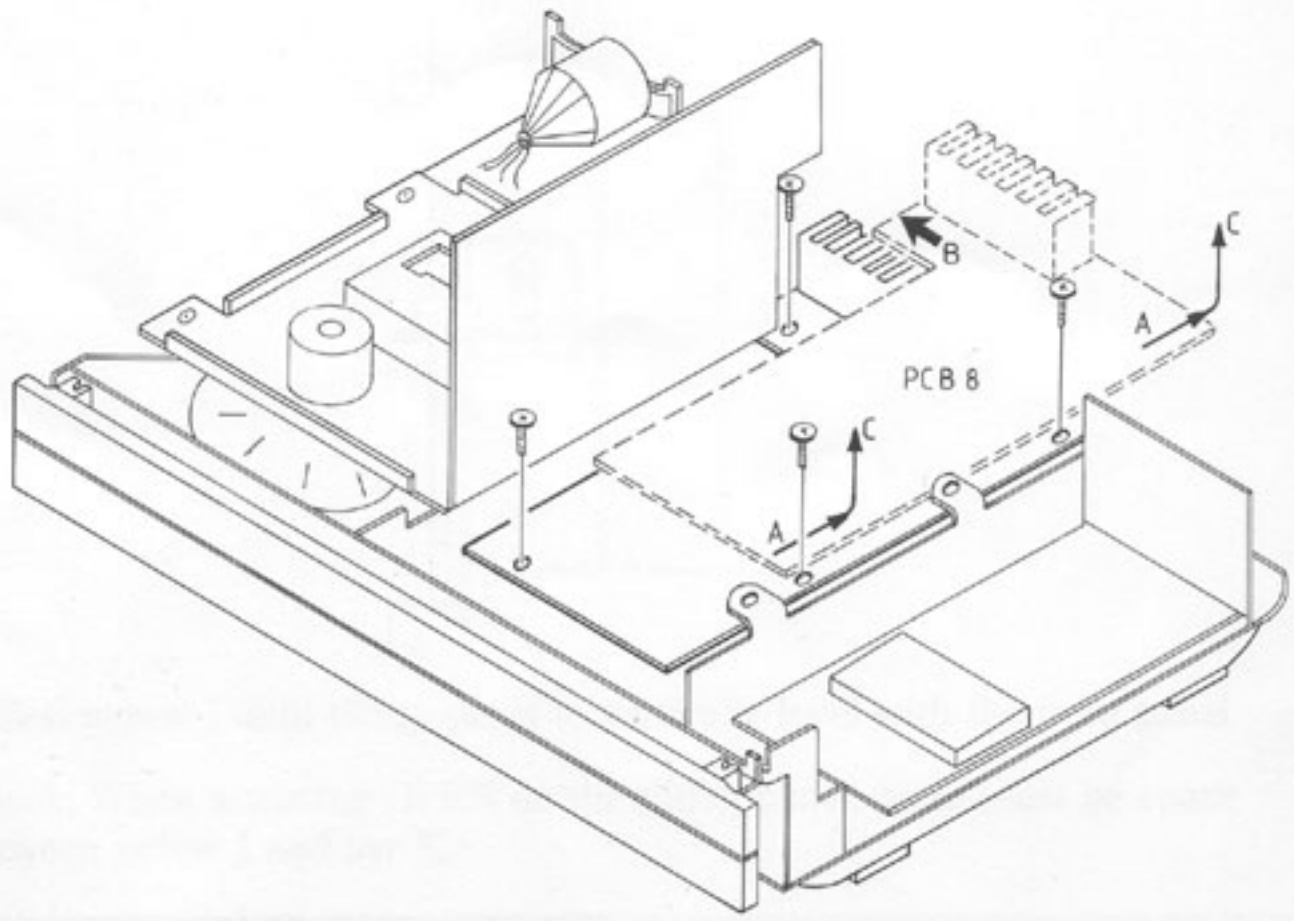

Remove the four screws.
PCB8 can now be pushed backwards approx. 5 cm (in the direction of the arrow A). Now push PCB8 towards the left (in the direction of the arrow B), at the same time lifting past the 2 metal holders. First lift PCB8 past the front metal holder, then past the rear metal holder. Now carefully turn around PCB8 and place on its edge.

Mechanics

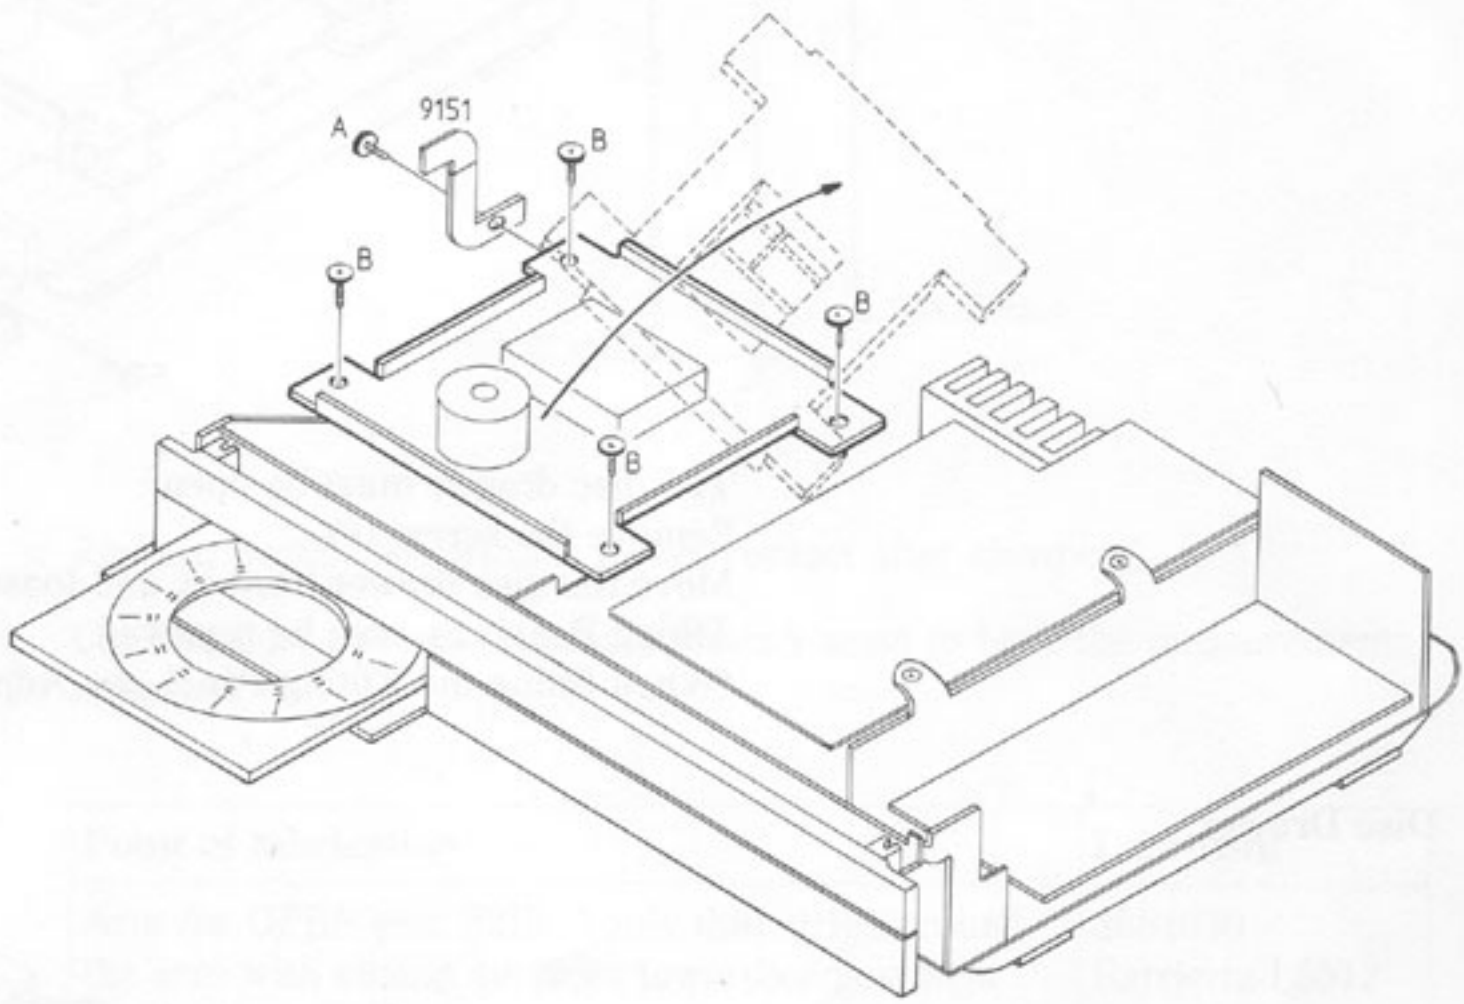

The disc drawer must be open (see service tips page 8-2). Remove the screws A as well as the holder pos. 9151. Remove the four screws B. The top part can now be lifted up, and it is possible to service the mechanical part.

Display Panel

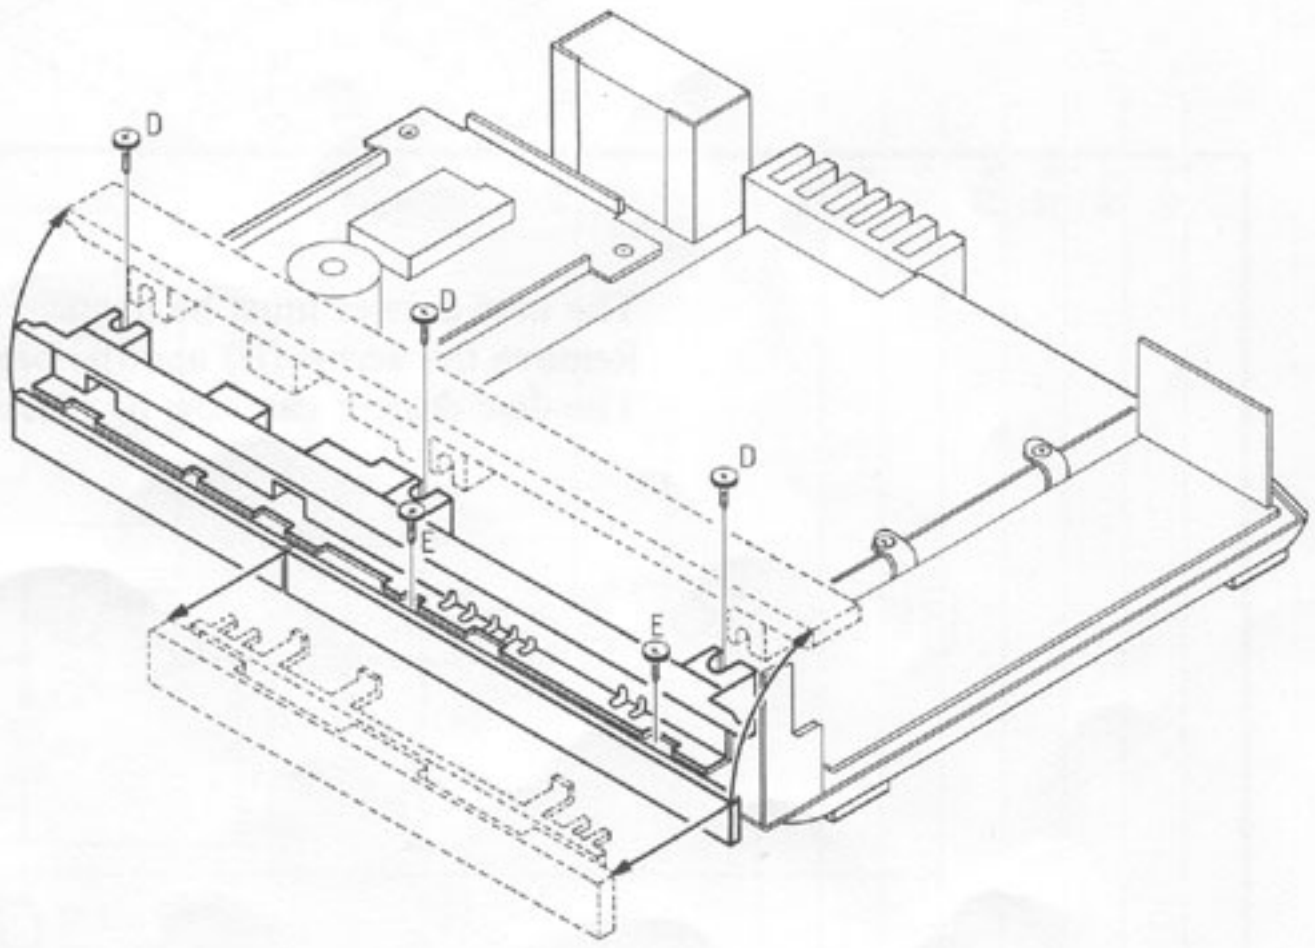

Remove the tree screws (D). The front panel can now be tilted upwards. Remove the two screws (E); the display panel can now be pulled out.

Tilting Panel

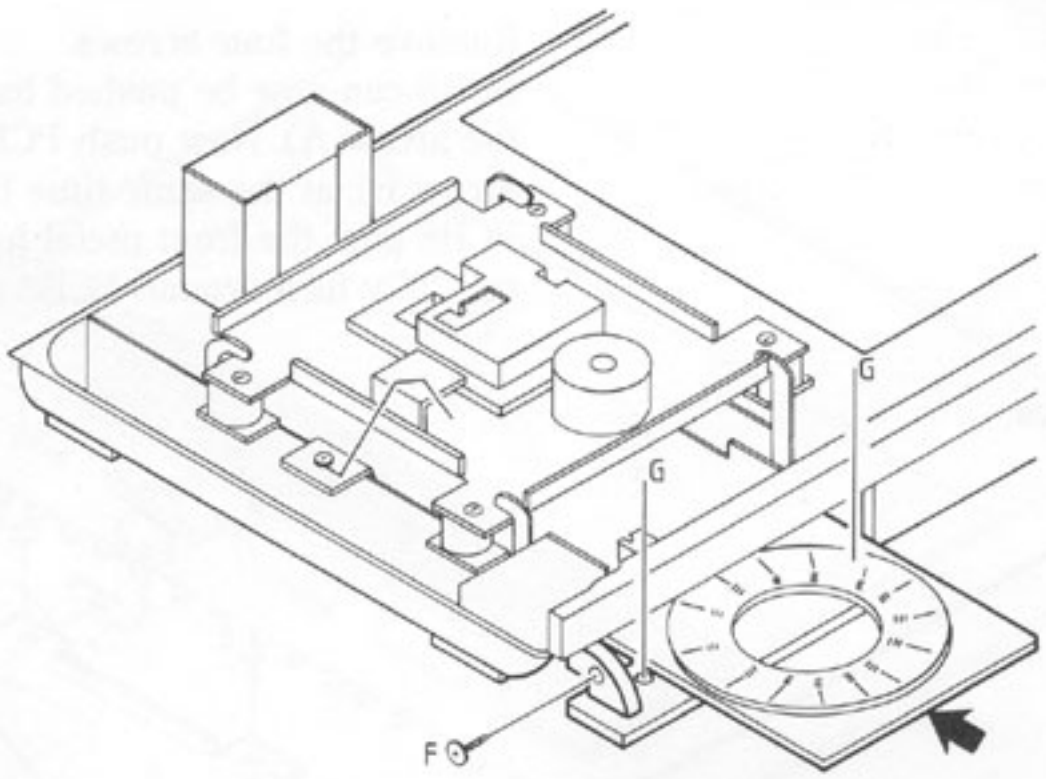

The disc drawer must be open.
Remove the screw (F).
Move the disc drawer back in, and loosen the two Allen screws (G). The Tilting Panel can now be removed.
(When fitting the Tilting Panel, see Adjustments page 5-4).

Disc Drawer

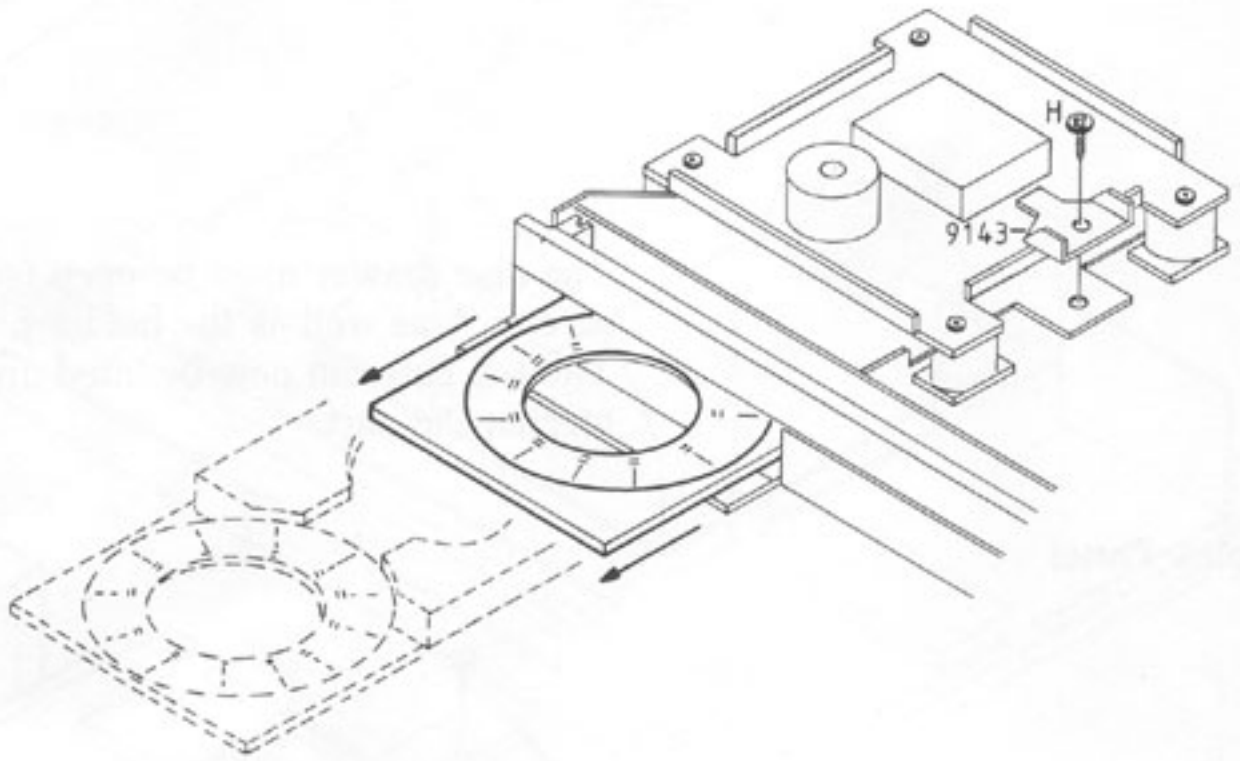

The disc drawer must be open.
Remove the screw (H) and the bracket (pos. 9143).
The disc drawer can now be pulled out.

SERVICE TIPS
When actuating, the set remains in Standby

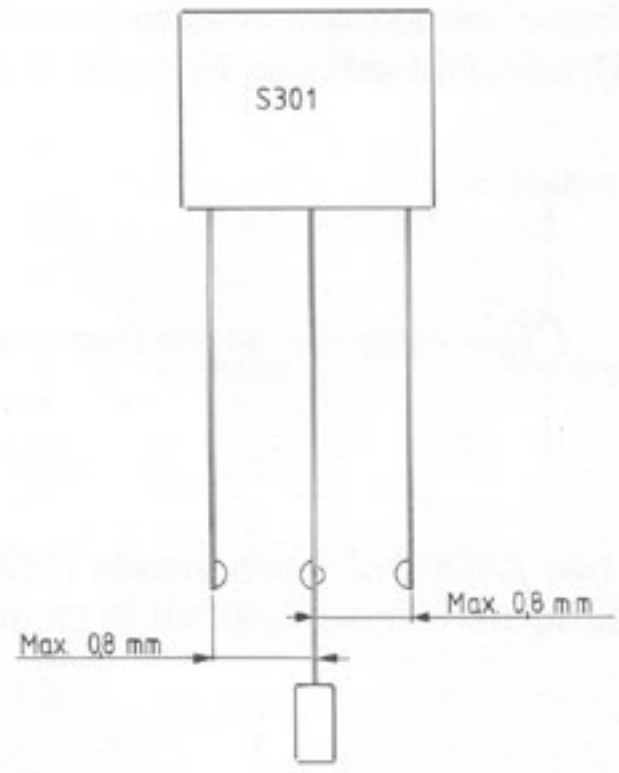

Reason: Switch pos. 91S301 looses contact after clamping.

Check/adjust the two stationary contact arms to have the measurements indicated.

Lubrication

Point of lubrication	Lubricant
Arm for OPEN pos. 9219: Apply thin stripe around the arm with sliding surfaces towards adjustment bracket pos. 9208. Camwheel pos. 9138: Apply to the rail for bracket pos. 9135 as well as to the moving parts on the bracket pos. 9135.	3984030 Barrierta L5512 (25 gr.)

Data mute, ST. BY

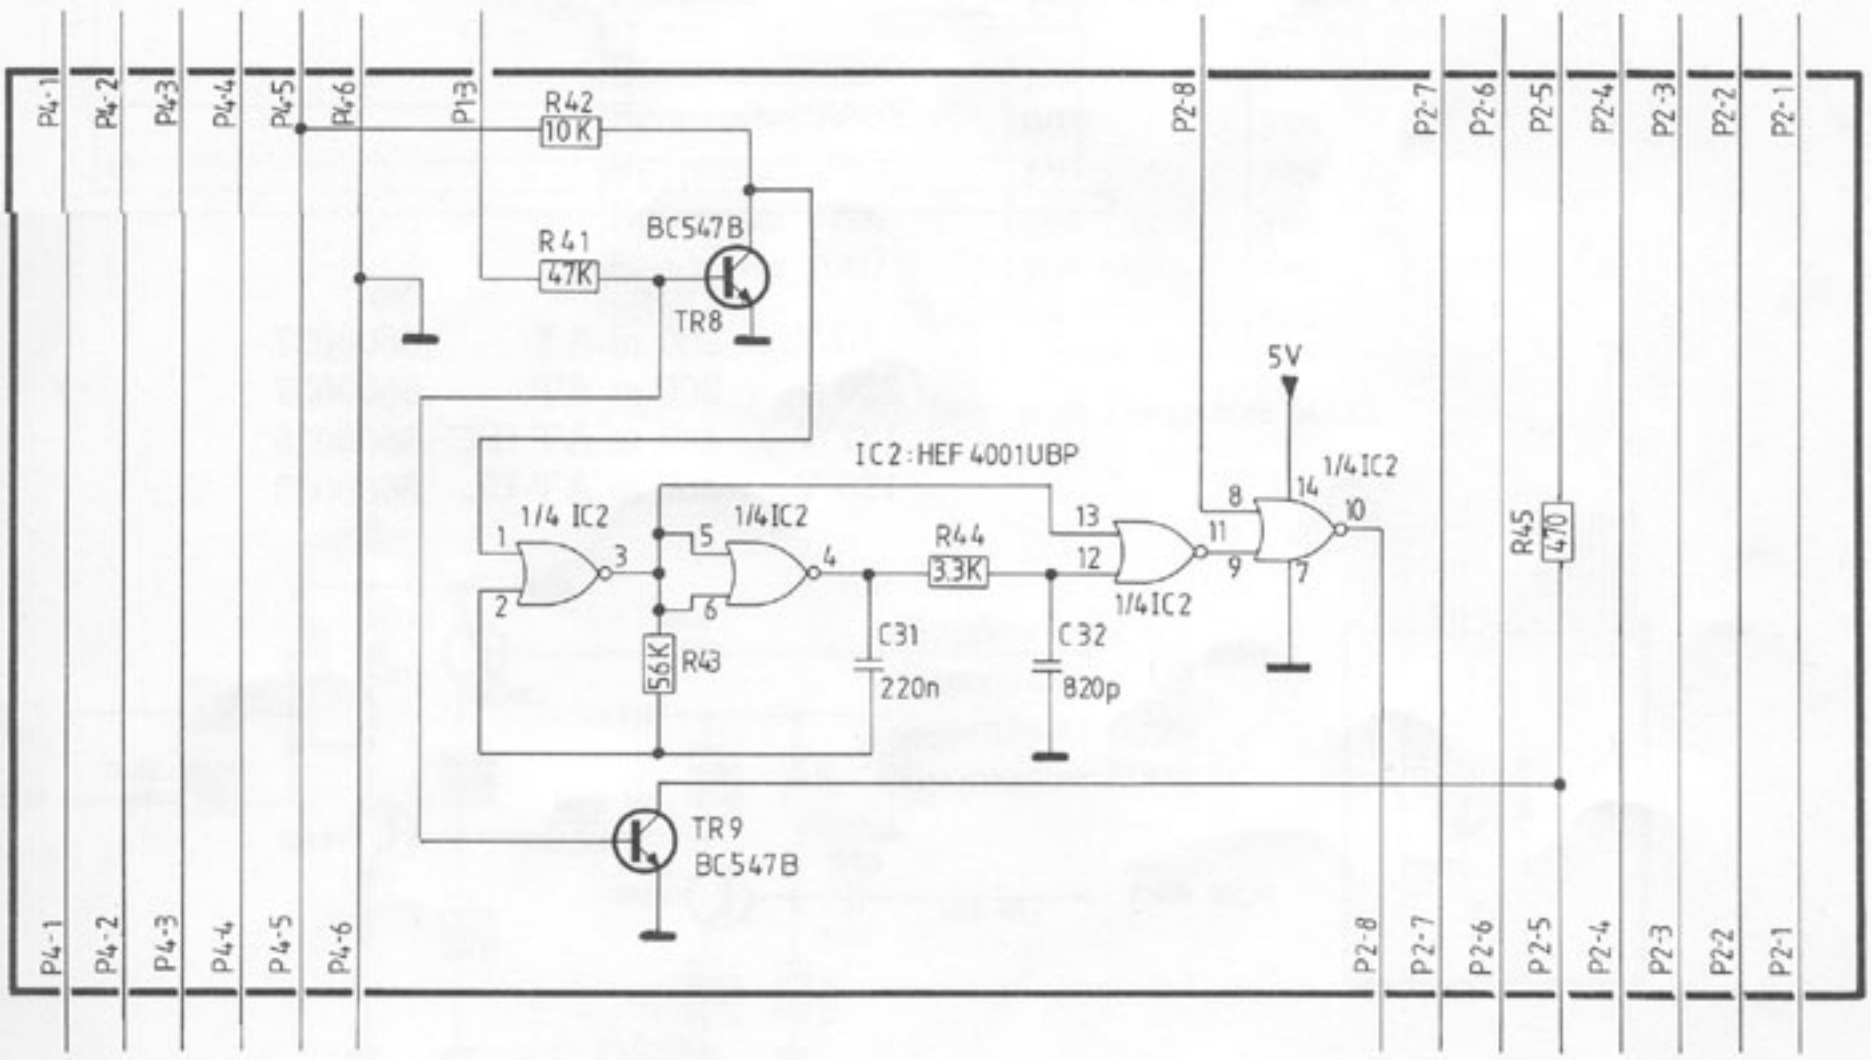

In the first products manufactured this circuit is mounted instead of 1TR3, 1R8 and 1R9. The circuit mutes data transmission in ST.BY. The circuit is mounted at its edge in P2 and P4 on PCB1.

Manual moving in and out of disc drawer

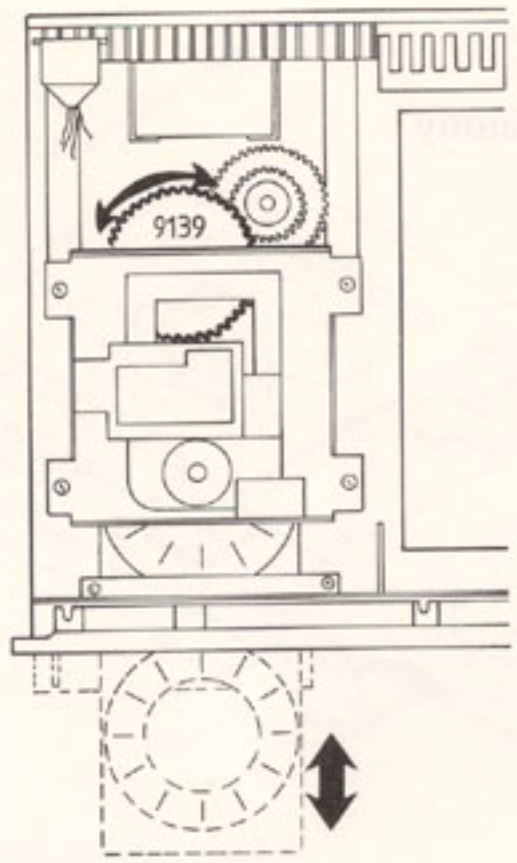

When turning the large camwheel pos. 9139 counterclockwise, the disc drawer will move out.

When turning the camwheel pos. 9139 clockwise, the disc drawer will move back in, and the disc clamper will lift the compact disc.

Mains Voltage Switch

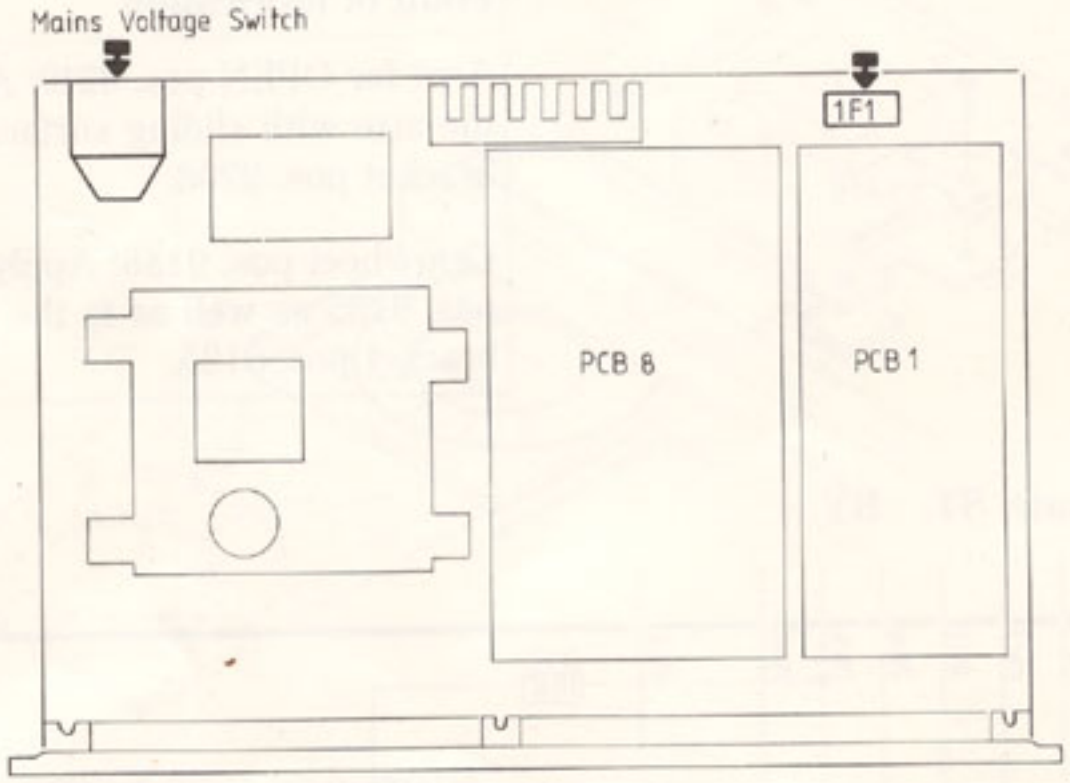

	Fuse	No
240 V	200 m AT	6600037
220 V	200 m AT	6600037
127 V	400 m AT IEC	6600015
120 V	500 m AT UL	6600033

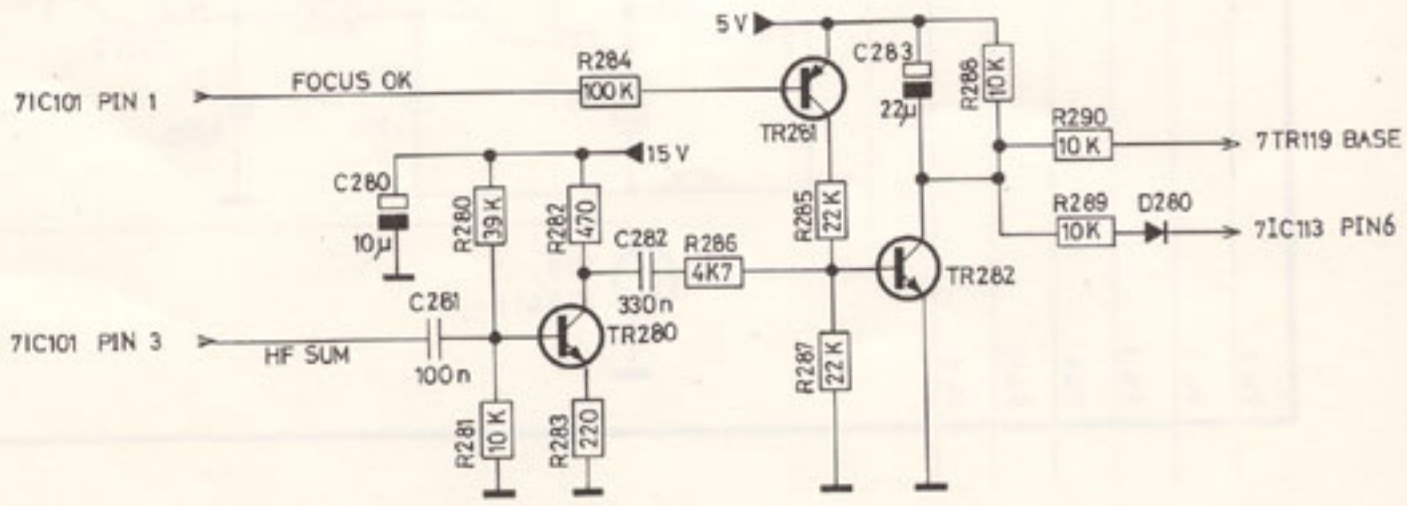

In the first products manufactured this circuit is mounted instead of Lead out detector 7IC816.

Carrier motor mute

In the first products manufactured 7TR801 is type SC 18154. This type of transistor does not secure efficient mute of the negative period. To secure muting, there is mounted an extra transistor (BC 547B) parallel with 7TR801.

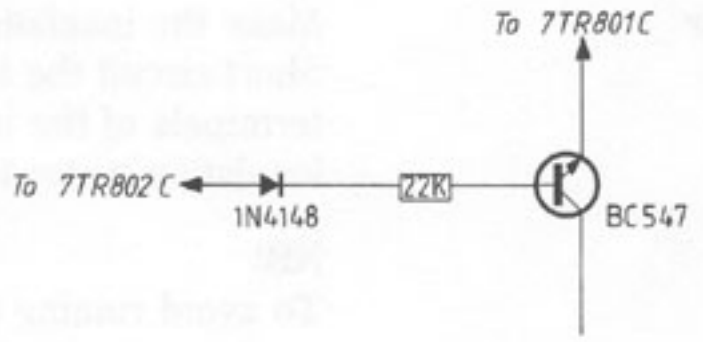

When replacing 7TR801 always use a 2SC2878A part no. 8320660. This transistors secures mute of the negative and the positive period.

Data Link

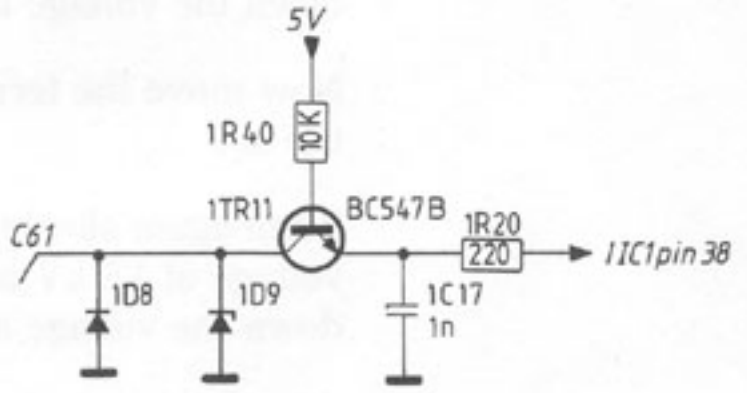

In order to avoid load of the data link in other sets, when the CD50 is not connected to the mains, the above circuit will be introduced in the production. The circuit is introduced instead of 1D2, 1D3, 1R36 and 1C29.

CD-TERMINAL

Possible functions in other Bang & Olufsen products

If required the CD-Terminal may be used with a few other Bang & Olufsen products. Together with CD 50.
The possible functions and the products which are operable appear from the following plan.

Product	Tape 2	Stand By
Beomaster 8000	yes	yes
Beomaster 6000	no	yes
Beomaster 3000	no	yes
Beocenter 7700	yes	yes
Beocenter 7007	yes	yes
Beocenter 7000/7002	no	yes

Data link only functions with Beosystem 5000.

Applies only for:
Beomaster 8000
Beomaster 6000
Beomaster 3000

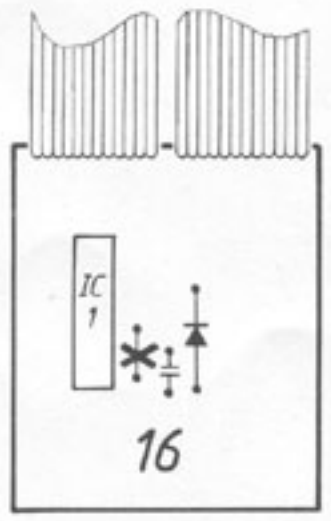

OBS!
In case the CD-Terminal is used with the following products PCB16 *must* be modified as illustrated (jumper is removed).

INSULATION TEST

Each set *must* be insulation tested after dismantling. The test is to be performed when the set has been re-assembled and is ready for delivery to the customer.

Insulation test for Beogram CD50

Make the insulation test as follows:
Short-circuit the two plug pins of the mains plug and connect one of the terminals of the insulation tester. Connect the other terminal of the insulation tester to the chassis pin of one of the phono bushings.

NB!
To avoid ruining the set, it is essential that both insulator test terminals are in really good mechanical contact.

Now slowly turn the voltage control of the insulation tester until a voltage of 1.5 kV is obtained. Hold it there for 1 second, and slowly turn down the voltage again.

Now move the terminal from the chassis pin to a screw in the bottom of the set.

Then again slowly turn the voltage control of the insulation tester until a voltage of 1.5 kV is obtained. Hold it there for 1 second, and slowly turn down the voltage again.

At no point during the testing procedure any flash-overs are permissible.